

City™ RTSF Water-to-Water Heat Pump



Cooling capacity: 180-385 kW

Heating capacity: 195-430 kW

- 99.5% reliability rate with screw compressor technology and Adaptive Frequency™ Drive as standard
- Fully optimized for HFO R1234ze (<1 GWP). Available with R515B as an alternative
- Minimized refrigerant charge with stainless steel plate heat exchangers
- Compact and modular, they particularly fit in restricted spaces. 920 mm width only
- Ideal modular HFO solution for tight spaces
- Heating up to 80°C; source temperature from -12C to +30C




Sustainable and efficient

The City RTSF has been designed to reduce environmental impact. This is a low global warming potential solution with industry leading efficiencies for capacities below 400 kW. The City RTSF features low GWP (<1) R1234ze and carries the EcoWise endorsement.

Compact and modular


Modern cities often present challenges when it comes to easy transportation of large units into, onto or next to buildings. The City has been specially engineered for restricted spaces, and easy installation.

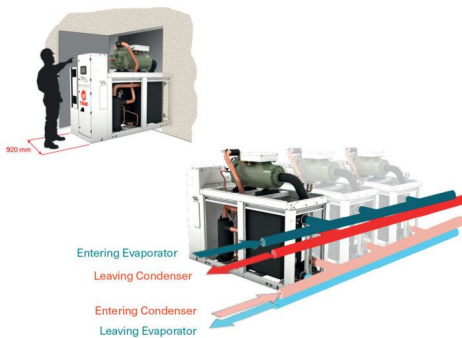

Wide range of applications

The City chiller satisfies any application and covers a wide spectrum of operating conditions:

- City Comfort prioritizes performance and sustainability. Efficiency is optimized for moderate comfort applications in cooling or heating up to 50°C, or industrial process applications at positive temperatures.
- City Process is a highly sustainable solution (GWP < 1) with safe operation. Efficiency has been optimized for freezing industrial brine process applications. City Process delivers hot water between 10°C and 80°C, with source temperatures from -12°C to +5°C.

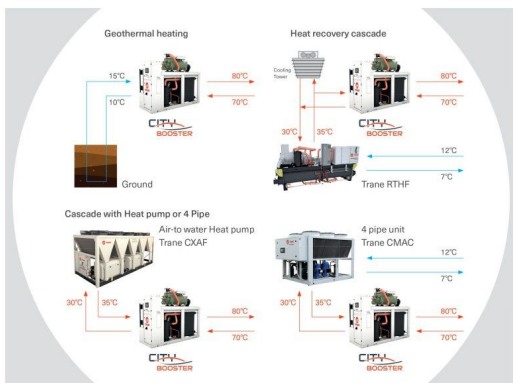

- City Booster optimizes operation and efficiency to deliver hot water between 50°C and 80°C, with source temperatures from +5°C to +30°C. City Booster offers a unique opportunity to move to renewable energy heating.



Trane expertise and experience

Trane industry-leading compressor: Direct drive, low speed screw AFD driven for premium efficiency, perfect load matching and unequalled reliability and durability.

Range description

- Heating: From -12 to 30°C on the evaporator side and up to +80°C on the condenser side
- City chillers are available in six different cooling capacities with a number of options such as sound attenuation panels (up to -9 dB(A)).

Technical specifications

Cooling capacity	180-385 kW
Heating capacity	195-430 kW
Eurovent certification	●
ErP Certification	●
Refrigerants	R1234ze R515B
Operating mode	Cooling only Heat pump
Energy saving	Adaptive Frequency™ Drive



Compressor

Screw

Product data

RTSF G - Heat pump

	P _c (1) kW	EER (1)	SEER (2)	Ph (3) kW	COP (3)	Ph (4) kW	COP (4)	SCOP (4)	LwO (5) dB(A)	L (6) mm	W (6) mm	H (6) mm	OW (6) kg
RTSF 050 G	176,0	4,65	5,98	186,6	4,40	-	-	-	83	2240	900	1940	1610
RTSF 060 G	212,0	4,66	6,00	223,5	4,40	-	-	-	93	2240	900	1940	1675
RTSF 070 G	245,0	4,87	6,53	260,6	4,60	-	-	-	98	2240	900	1960	1900
RTSF 090 G	295,0	4,88	6,60	313,2	4,57	-	-	-	98	2240	900	1960	1985
RTSF 100 G	341,0	4,59	6,63	371,9	4,42	-	-	-	98	2240	900	1960	1985
RTSF 110 G	385,0	4,34	6,43	428,4	4,25	-	-	-	94	2240	900	1960	1985

P_c: Cooling capacity

Ph: Heating capacity

LwO: A-weighted sound power level outside

H: Height

EER: Energy Efficiency Ratio (cooling)

COP: Coefficient Of Performance (heating)

L: Length

OW : Operating Weight

SEER: Seasonal Energy Efficiency Ratio

SCOP: Seasonal Coefficient Of Performance

W: Width

(1): Evaporator water temperature in/out 12/7°C - Condenser water temperature in/out 30/35°C (EN 14511:2022)

(2): Ecodesign rating for comfort chillers. Source water temperature in/out 30/35°C and evaporator water temperature in/out 12/7°C. SEER/η_{s,c} as defined in REGULATION (EU) N° 2016/2281 of 20 December 2016

(3): Evaporator water temperature in/out 10/7°C - Condenser water temperature in/out 40/45°C

(4): Ecodesign rating at low temperature conditions. Source water temperature in/out 10/7°C and hot water temperature in/out 30/35°C. SCOP / η_{s,h} as defined in REGULATION (EU) N° 813/2013 of 2 August 2013

(5): According to ISO 9614:2009, without accessories

(6): Basic unit without accessories

RTSF G - Heating Only

	Ph (1) kW	COP (1)	Ph (2) kW	COP (2)	SCOP (2)	Ph (3) kW	COP (3)	LwO (4) dB(A)	L (5) mm	W (5) mm	H (5) mm	OW (5) kg
RTSF 050 G	186,6	4,40	173,9	3,63	4,63	158,2	2,85	83	2240	900	1940	1610
RTSF 060 G	223,5	4,40	208,5	3,64	4,70	190,3	2,87	93	2240	900	1940	1675
RTSF 070 G	260,6	4,60	244,1	3,80	4,88	225,7	3,01	98	2240	900	1960	1900
RTSF 090 G	313,2	4,57	294,0	3,77	4,93	271,8	2,99	98	2240	900	1960	1985
RTSF 100 G	371,9	4,42	351,0	3,71	4,99	327,0	2,98	98	2240	900	1960	1985
RTSF 110 G	428,4	4,25	405,5	3,60	5,08	378,9	2,91	94	2240	900	1960	1985

Ph: Heating capacity

LwO: A-weighted sound power level outside

H: Height

COP: Coefficient Of Performance (heating)

L: Length

OW : Operating Weight

SCOP: Seasonal Coefficient Of Performance

W: Width

(1): Evaporator water temperature in/out 10/7°C - Condenser water temperature in/out 40/45°C

(2): Ecodesign rating for Heat pumps. Source water temperature in/out 10/7°C and hot water temperature in/out 47/55°C. SEER/η_{s,h} as defined in REGULATION (EU)

N°813/2013 of 2 August 2013

(3): Evaporator water temperature in/out 10/7°C - Condenser water temperature in/out 55/65°C (EN 14511:2022)

(4): According to ISO 9614:2009. Eurovent conditions, with 1pW reference sound power (without accessories)

(5): Basic unit without accessories

Improve Operations

Technology is continuously evolving and Trane Engineering is ahead of the curve in bringing innovation into product development. Our sustainable solutions deliver enhancements to the Trane installed base to make your chillers and heat pumps even "better than before". That's Trane Building Advantage - TBA.

Trane Rental Services

Cooling and heating are services, not products. A process or a building does not need a chiller or a boiler sitting on a roof, but a reliable and efficiency supply of cold or hot water, cold or warm air. This is the essence of what we do at Trane Rental Services. Let us take care of it for you.



Read more <https://trane.eu/rental>

Trane has a policy of continuous product and product data improvement and reserves the right to change design and specifications without notice.



Trane – by Trane Technologies (NYSE: TT), a global climate innovator – creates comfortable, energy efficient indoor environments through a broad portfolio of heating, ventilating and air conditioning systems and controls, services, parts and supply. For more information, please visit trane.eu or tranetechnologies.com.