

REVIVE PLUS

NOVO

Haier


2,7 kW

3,5 kW


4,8 kW

6,2 kW

A++ / A+

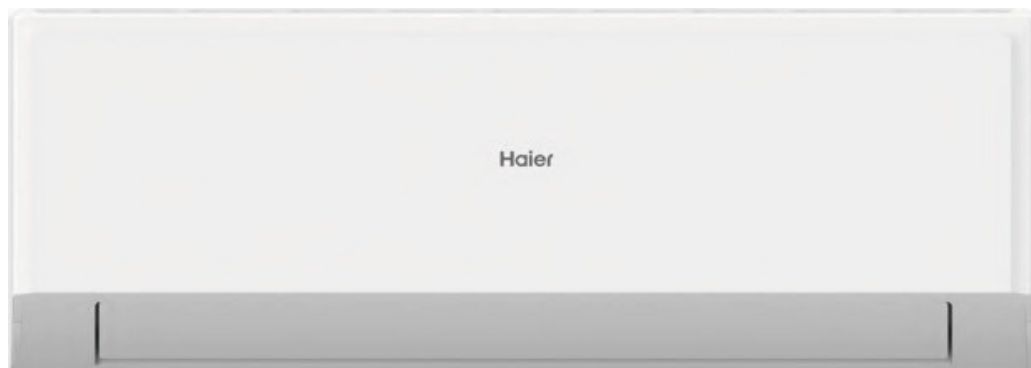

Coanda Plus



Self Clean



Integrated Wi-Fi Control



Easy Installation



Blue fin (silver ion coating)



3D airflow



Sleep mode



Self diagnosis



Auto vertical airflow



3mins protection



Auto restart



88 display



Auto mode



Turbo cooling



Warm start



Self defrosting



Standard YR-HE2



Grejanje na -20°C
Hlađenje na -20°C

UNUTRAŠNJA JEDINICA	Model		AS25RBAHRA-PL	AS35RBAHRA-PL	AS50RCBHRA-PL	AS68RDAHRA-PL
SPOLJAŠNJA JEDINICA	Model		1U25YESFRA-3	1U35YESFRA-4	1U50MERFRA-4	1U68MRAFRA-4
Hladjenje						
Kapacitet	nom (min-max)	Btu/h	9215 (2390-11600)	10920(2730-12965)	16380(4430-18420)	21150(4430-25250)
	nom	kW	2,7	3,55	4,8	6,20
	(min-max)	kW	2,7(0,7-3,4)	3,2 (0,8-3,8)	1,30-5,40	(1.30-7.40)
Energetska efikasnost	SEER		6,5	6,1	6,30	6,70
Energetska efikasnost	EER		3,23	3	2,81	3,10
Energetska klasa			A++	A++	A++	A++
Ulazna snaga	nom	kW	0,84	0,99	1,708	2,000
Ulazna snaga	min/max	kW	(0,3-1,1)	(0,4-1,3)	(0,40-1,90)	(0,40-2,20)
Godišnja potrošnja energije		kWh/a	145	204	267	324
Deklarisani temp. opseg rada	min/max	°C	-20-43°C	-20-43°C	-20-43°C	-20-43°C
Grejanje						
Kapacitet	nom (min-max)	Btu/h	9895 (2390-12285)	1945 (2390-13650)	16380(4430-18420)	21500 (4770-25590)
	nom	kW	2,9	3,9	4,8	6,30
	Rang(min-max)	kW	(0,7-3,6)	(0,7-4,0)	(1,3-5,4)	(1,4-7,5)
Energetska efikasnost	SCOP		4	4	4	4
Energetska efikasnost	COP (umereno)		3,71	2,9	3,6	3,61
Energetska efikasnost	SCOP (toplo/hladno)		5,1/-	5,1/-	5,1/-	5,1/-
Energetska klasa	Umereno/toplo/hladno		A+/A+++/-	A+/A+++/-	A+/A+++/-	A+/A+++/-
Ulazna snaga	nom	kW	0,78	0,943	1,333	1,745
Ulazna snaga	Rang(min-max)	kW	(0,3-1,2)	(0,4-1,4)	(0,4-1,9)	(0,6-2,3)
Godišnja potrošnja energije		kWh/a	910	1050	1260	1610
Deklarisani temp. opseg rada		°C	-20-24°C (spolja)	-20-24°C (spolja)	-20-24°C (spolja)	-20-24°C (spolja)
Napajanje	Ph/V/Hz		1/220-240/50	1/220-240/50	1/220-240/50	1/220-240/50
	Pozicija		spolja	spolja	spolja	spolja

UNUTRAŠNJA JEDINICA		Model		AS25RBAHRA-PL	AS35RBAHRA-PL	AS50RCBHRA-PL	AS68RDAHRA-PL
SPOLJNA JEDINICA		Model		1U25YESFRA-3	1U35YESFRA-4	1U50MERFRA-4	1U68MRAFRA-4
Unutrašnja jedinica							
Dimenzije	Neto	Š/D/V	mm	805*292*200	805*292*200	875/212/304	975/222/318
	Bruto	Š/D/V	mm	876*365*272	876*365*272	945/390/296	1050/397/301
Težina (neto/bruto)			kg	8.3/10.5	8.3/10.5	10.0/12.0	11.6/14.4
Protok vazduha(hlađenje, grejanje)		MAX	m³/h	610/550	640/600	770/810	1100/1000
Nivo buke	Hlađenje (visoki)		dB(A)	54	56	60	64
	Grejanje (visoki)		dB(A)	54	56	60	64
Nivo zvučnog pritiska	Hlađenje (v. s. n)		dB(A)	37/32/28/18	38/33/29/18	44/40/35/28	47/45/37/29
	Grejanje (v. s. n)		dB(A)	37/32/28/18	38/33/29/18	44/40/35/28	47/45/37/29
Odvlaživanje			10-3m³/h	/	/	2	2,8
Spoljašnja jedinica							
Kompresor				RECHI	HIGHLY	SANYO	HIGHLY
Dimenzije	Neto	Š/D/V	mm	700*245*544	700*245*544	800/275/553	800/275/553
	Bruto	Š/D/V	mm	819*320*592	819*320*592	902/375/607	902/375/607
Težina (neto/bruto)			kg	23.6/26	24.6/27	29.2/32.1	32.7/36.5
Protok vazduha(hlađenje,grejanje)		MAX	m³/h	2100	2100	2200/2200	2500/2500
Nivo buke		Visoki	dB(A)	63	64	65	68
Nivo zvučnog pritiska		Visoki	dB(A)	49	51	54	57
Radna jačina struje		MAX	A	5.32	5.76	8.6	10.5
Tip gasa		R32		R32	R32	R32	R32
Punjenje gasa		R32	g	510	510	780	900
Freonska instalacija	Cevna veza-teč.		mm	6,35	6,35	6,35	6,35
	Cevna veza-gas		mm	9,52	9,52	12.7	12.7
	Max cevna dužina/visina		m	20/10	20/10	20/15	25/15
	Max dužina cevi bez dodatnog punjenja		m	5	5	7	7
	Dodatno punjenje		g/m	20	20	20	20

