




VAC R 32 INVERTER XA71/XA82 - I2



Grejanje na -20°C
Hlađenje na -15°C

Dodatni električni
grejač tacne kućišta

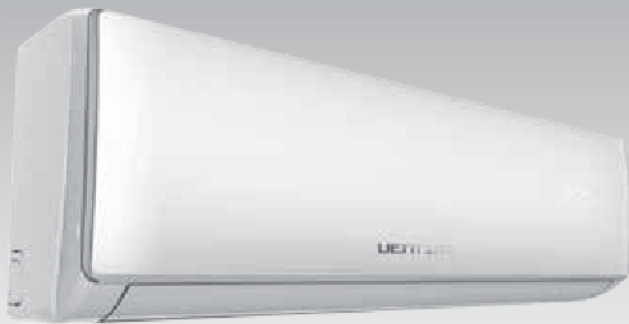

WI-FI



AKTIV KARBON FILTER - Apsorbuje čestice i mirise iz vazduha.



Jonizator - Proizvodi negativne jone, pomoću kojih se eliminiše prašina i dim.



8°C GREJANJE - Mogućnost održavanja tem. Od 8°C na grejanju.



GREJANJE
NA -20°C



HLAĐENJE
NA -15°C



I FEEL - Mogućnost preciznijeg podešavanja režima rada i temperature pomoću senzora temperature ugrađenog u daljinski upravljač.



AUTOMATSKI REŽIM - Mogućnost automatskog podešavanja režima rada i temperature pomoću senzora temperature smeštenog u unutrašnjoj jedinici.



PRIJATNO HLAĐENJE - Održavanje ugodne vlažnosti u režimu hlađenja.



PRIJATANO IZDUVAVANJE VAZDUHA - Mogućnost izbora ugodnog izduvavanja vazduha.



ANTI-COLD - Mogućnost sprečavanja izduvavanja hladnog vazduha u režimu grejanja.



REŽIM TIHOG RADA



DVOSTRUKA DRENAŽA - Lakše pozicioniranje uređaja.



LED DISPLEJ



POZADINSKO SVETLO - Držite tri sekunde bilo koje dugme na daljinskom upravljaču da bi se svetlo upalilo.



MEMORIJA POZICIJE KRILCA - Otvor za vazduh (krilce) se vraća u prethodni položaj kada se uređaj ponovo pokrene.



TAJMER - Podešavanje automatskog paljenja/gašenja.



REŽIM MIROVANJA - Podešavanje prijatne temperature u noćnom režimu.



ECO - Mogućnost režima rada hlađenja uz smanjenu potrošnju.



TURBO - Mogućnost pojačanog hlađenja ili zagrevanja u kratkom vremenskom periodu.



AUTO RESTART - Mogućnost pamćenja postavki zadatih pre isključenja uređaja.



SAMODIJAGNOSTIKA - Prepoznavanje tehničkog problema rada uređaja.



DETEKCIJA CURENJA GASA - Uređaj prijavljuje grešku i prestaje sa radom.




POZLAČENI IZMENJIVAČ - Specijalni zlatni, antikorozivni premaz izmenjivača toplote, štiti spoljašnju jedinicu od spoljašnjih oštećenja izazvanih vlagom, atmosferskih pojava i uticaja agresivnog okruženja. Zaštita od korozije.

VAC R32 Inverter



Pozlaćeni izmenjivač - funkcija samo za model XA71-I2

09CHSD / 12CHSD / 18CHSD / 24CHSD

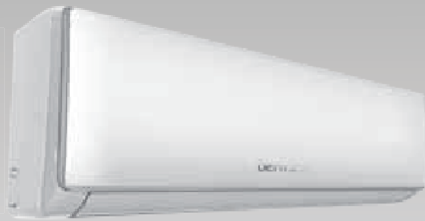

XA71-I2








XA82-I2

JEDINICA			9k	12k	18k	24k
UNUTRAŠNJA			VAC-09CHSD-XA82/XA71-I2	VAC-12CHSD-XA82/XA71-I2	VAC-18CHSD-XA82/XA71-I2	VAC-24CHSD-XA82/XA71-I2
Kapacitet (Min/Nom/Max)	Hlađenje	BTU/h	3207 / 8871 / 11260	3412 / 11601 / 12864	4265 / 17402 / 20131	6244 / 23237 / 26649
		kW	0.94 / 2.60 / 3.30	1.00 / 3.40 / 3.77	1.25 / 5.10 / 5.90	1.83 / 6.81 / 7.81
	Grejanje	BTU/h	3207 / 8906 / 11465	3412 / 11670 / 13000	4265 / 17504 / 20746	6312 / 23441 / 27058
		kW	0.94 / 2.61 / 3.36	1.00 / 3.42 / 3.81	1.25 / 5.13 / 6.08	1.85 / 6.87 / 7.93
Ulazna snaga	Hlađenje	W	240 / 800 / 1380	290 / 1130 / 1500	330 / 1579 / 2350	410 / 2226 / 2800
	Grejanje	W	240 / 699 / 1552	290 / 922 / 1720	340 / 1382 / 2540	420 / 1903 / 3000
SEER			6.3	6.1	6.1	6.5
SCOP			4.0	4.0	4.0	4.1
Energetska klasa	Hlađenje		A++	A++	A++	A++
	Grejanje		A+	A+	A+	A+
Zvučni pritisak (S/H/M/L/Mute)		dB(A)	40/37/33/25/22	40/37/33/25/22	43/41/38/35/27	44/41/38/34/30
Protok (Grejanje/Hlađenje)		m ³ /h	420/420	550/550	800/800	970/980
Stepen smanjenja vlage		l/h	1.0	1.2	1.5	1.8
Radna jačina struje	Hlađenje	A	1.2 / 4.6 / 8.0	1.5 / 5.8 / 9.0	1.7 / 8.1 / 12.0	2.3 / 11.3 / 12.9
	Grejanje	A	1.2 / 4.1 / 9.0	1.5 / 4.7 / 10.0	1.7 / 7.1 / 13.0	2.3 / 9.7 / 13.7
Napajanje		V .Hz.Ph	220~240/50/1	220~240/50/1	220~240/50/1	220~240/50/1
Dimenzije (WxHxD)	Jedinica	mm	698x255x190	777x250x201	910x294x206	1010x315x220
	Pakovanje	mm	764x325x257	850x320x275	979x372x277	1096x390x297
Neto/Bruto masa		kg	6.5 / 8.5	8 / 10.5	10 / 13	13 / 16
SPOLJAŠNJA						
Temperaturni opseg	Hlađenje	°C	-15 ~ 53	-15 ~ 53	-15 ~ 53	-15 ~ 53
	Grejanje	°C	-20 ~ 30	-20 ~ 30	-20 ~ 30	-20 ~ 30
Snaga grejača		W	50	50	50	50
Zvučni pritisak		dB(A)	50	50	55	57
Dimenzije cevi (m)	Maks. duž. freonske cevi		25	25	25	25
	Maks. visinska razlika		10	10	10	10
Cevna veza	Tečnost	mm	Ø6.35	Ø6.35	Ø6.35	Ø6.35
	Gas	mm	Ø9.52	Ø9.52	Ø9.52	Ø12.7
Rashladno sredstvo	Tip		R32	R32	R32	R32
	Punjenje	kg	0.53	0.55	0.92	1.06
Dimenzije (WxHxD)	Jedinica	mm	777x498x290	777x498x290	853x602x349	920x699x380
	Pakovanje	mm	818x520x325	818x520x325	890x628x385	960x732x400
Neto/Bruto masa		kg	24 / 26	24 / 26	35 / 38	40 / 43

DIMENZIJE

Model	A	B	C	D	E	F	G	H	I	J	K
VAC-09CHSD-XA82/XA71-I2	698	255	190	777	498	290	415	291	225	48.5	52
VAC-12CHSD-XA82/XA71-I2	777	250	201	777	498	290	415	291	225	48.5	52
VAC-18CHSD-XA82/XA71-I2	910	294	206	853	602	349	520	349	314	53.9	52
VAC-24CHSD-XA82/XA71-I2	1010	315	220	920	699	380	580	374.9	347.5	58.6	63

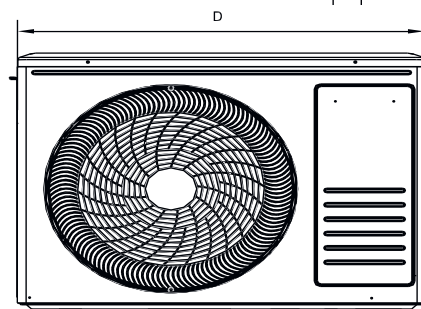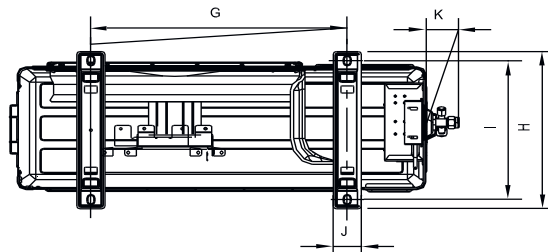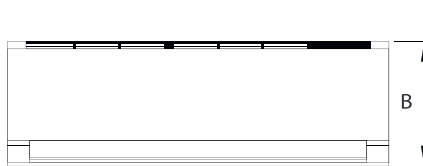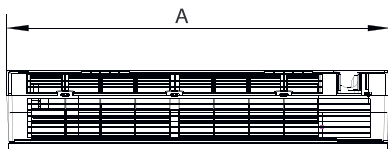

OSOVINSKI RAZMAK NOSAČA

Model	415 mm
VAC-09CHSD-XA82/XA71-I2	415 mm
VAC-12CHSD-XA82/XA71-I2	415 mm
VAC-18CHSD-XA82/XA71-I2	520 mm
VAC-24CHSD-XA82/XA71-I2	580 mm