

TEST REPORT
IEC 60335-2-40
Safety of household and similar electrical appliances

Part 2-40: Particular requirements for electrical heat pumps, air conditioners
and dehumidifiers

Report Number: LVD20160922001 Rev.00
Date of issue: 2016-09-19
Total number of pages: 114



Applicant's name: GD Midea Air-Conditioning Equipment Co., Ltd.
Address: Midea Industrial City, Beijiao, 528311 Shunde, Foshan, Guangdong,
People's Republic of China

Test specification:
Standard: IEC 60335-2-40:2002 (Fourth Edition) + A1:2005 (incl. Corr.1:2006)
+ A2:2005 in conjunction with
IEC 60335-1:2010 (Fifth Edition)
Test procedure: CB Scheme
Non-standard test method: N/A

Test Report Form No.: IEC60335_2_40J
Test Report Form(s) Originator: VDE
Master TRF: Dated 2014-06

Copyright © 2014 Worldwide System for Conformity Testing and Certification of Electrotechnical Equipment and Components (IECEE), Geneva, Switzerland. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.


If this Test Report Form is used by non-IECEE members, the IECEE/IEC logo and the reference to the CB Scheme procedure shall be removed.

This report is not valid as a CB Test Report unless signed by an approved CB Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.

General disclaimer:

The test results presented in this report relate only to the object tested.
This report shall not be reproduced, except in full, without the written approval of the Issuing CB Testing Laboratory. The authenticity of this Test Report and its contents can be verified by contacting the NCB, responsible for this Test Report.

Test item description	WINDOW TYPE AIR CONDITIONER
Trade Mark	
Manufacturer	GD Midea Air-Conditioning Equipment Co., Ltd Midea Industrial City, Beijiao, 528311 Shunde, Foshan, Guangdong, People's Republic of China
Model/Type reference	MWF1-18HRN1-QC0
Ratings	220-240V~, 50Hz, Class I, indoor unit: IPX0, outdoor unit: IP24, R410a, for rating details see General product information of page 4.

Testing procedure and testing location:	
<input checked="" type="checkbox"/> Testing Laboratory:	
Testing location/ address	TEST CENTER OF GUANGDONG MIDEA REFRIGERATION EQUIPMENT CO., LTD. Midea Industrial City, Beijiao, 528311 Shunde, Foshan, Guangdong, People's Republic of China
Tested by (name + signature) :	Eva Wu 
Approved by (+ signature)	

List of Attachments (including a total number of pages in each attachment):	
1. Attachment No.1: 11 pages report for IEC 60335-1:A1/2013.	
Summary of testing:	
Tests performed (name of test and test clause): 1. All tests were carried out according to IEC 60335-2-40:2002 (Edition 4) + A1:2005 + A2:2005 and IEC 60335-1:2010+A1:2013. 2. Full tests were carried out on MSABE-24CRN1-NB8W.	Testing location: TEST CENTER OF GUANGDONG MIDEA REFRIGERATION EQUIPMENT CO.,LTD Midea Industrial City, Beijiao, 528311 Shunde, Foshan, Guangdong, People's Republic of China
Summary of compliance with National Differences:	
List of countries addressed N/A	

Copy of marking plate:

WINDOW TYPE AIR CONDITIONER			
MODEL		MWF1-18HRN1-QC0	
COOLING CAPACITY		18000Btu/h	
HEATING CAPACITY		15500Btu/h	
EXCESSIVE OPERATING PRESSURE		DISCHARGE	4.2MPa
		SUCTION	1.5MPa
POWER SOURCE		220-240V~ 50Hz, 1Ph	
REFRIGERANT		R410A/1200g	
STANDARD RATING CONDITIONS	COOLING	CURRENT	8.0A
		INPUT	1760W
	HEATING	CURRENT	7.5A
		INPUT	1650W
RATED CURRENT		12.0A	
RATED INPUT		2350W	
ELECTRICAL HEATER INPUT		—	
OUTSIDE RESISTANCE CLASS		IP 24	
			

Test item particulars	: --
Classification of installation and use	: Fixed appliance
Supply Connection	: Fixed wiring
.....	: --
Possible test case verdicts:	--
- test case does not apply to the test object.....	: N/A
- test object does meet the requirement	: P (Pass)
- test object does not meet the requirement.....	: F (Fail)
Testing	: --
Date of receipt of test item	: 2016-08-18
Date (s) of performance of tests	: 2016-08-18~2016-09-16
General remarks:	

"(See Enclosure #)" refers to additional information appended to the report.
"(See appended table)" refers to a table appended to the report.

Throughout this report a comma / point is used as the decimal separator.

This TRF includes an appendix EMF containing the IEC/EN 62233 requirements (see below).

IEC 62233:2005 (1. Edition)

EN 62233:2008 (incl. Corr.1:2008)

Manufacturer's Declaration per sub-clause 4.2.5 of IECCE 02:

The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided :
 Yes
 Not applicable

When differences exist; they shall be identified in the General product information section.

Name and address of factory (ies).....: GD Midea Air-Conditioning Equipment Co., Ltd.
Midea Industrial City, Beijiao, 528311 Shunde,
Foshan, Guangdong, People's Republic of China

1. The appliance is WINDOW TYPE AIR CONDITIONER.
2. The appliance have both cooling and heating functions..
3. The main power is supplied via the indoor unit by a 3-pole supply cable without plug which is not supplied by manufactory. Indoor unit and outdoor unit are connected by interconnection cable which is not supplied by manufactory.
4. Rating information:

Model	Indoor model	Outdoor model	Rated input and current	Refrigerant
MWF1-18HRN1-QC0	MWF1-18HRN1-QC0	/	2350W/12,0A	R410a

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
5	GENERAL CONDITIONS FOR THE TESTS		--
	Tests performed according to clause 5, e.g. nature of supply, sequence of testing, etc.		P
5.2	Tests of clause 21 carried out on separate samples. Tests of clauses 11, 19 and 21 require pressure measurements made at various points in refrigerating system (IEC 60335-2-40/A1)		P
	At least one additional specially prepared sample required for tests of annex FF (Leak simulation tests) (IEC 60335-2-40/A1)		N/A
	Temperatures on refrigerant piping measured during test of clause 11 (IEC 60335-2-40/A1)		P
5.6	Appropriate controls rendered inoperative during test (IEC 60335-2-40)		P
5.7	Tests of clauses 10 and 11 carried out under most severe operating conditions within operating temperature range specified by manufacturer. Annex AA provide examples of such temperature conditions (IEC 60335-2-40)		P
5.10	For split-package units, refrigerant lines installed in accordance with installation instructions (IEC 60335-2-40)		P
	Refrigerant line length is maximum length stated in installation instructions or (IEC 60335-2-40)		N/A
	7,5 m, whichever is shorter (IEC 60335-2-40)		P
	Thermal insulation of refrigerant lines applied in accordance with installation instructions (IEC 60335-2-40)		P
5.101	Motor-compressor subjected to relevant test of clause 19 of IEC 60335-2-34, unless (IEC 60335-2-40)		N/A
	motor-compressor comply with that standard (IEC 60335-2-40)		P
5.102	Motor-compressors tested and comply with IEC 60335-2-34 need not additionally tested for clause 21 (IEC 60335-2-40/A1)		P
6	CLASSIFICATION		--
6.1	Protection against electric shock: Class I, II, III (IEC 60335-2-40).....:	Class I	P
6.2	Protection against harmful ingress of water, IP degree in accordance with IEC 60529 (IEC 60335-2-40)		--
	- appliances or parts intended for outdoor use be at least IPX4 (IEC 60335-2-40);	Outdoor unit: IP24	P

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	- appliances intended only for indoor use (excluding laundry rooms) be IPX0 (IEC 60335-2-40);	Indoor unit: IPX0	P
	- appliances intended to be used in laundry rooms be at least IPX1 (IEC 60335-2-40).		N/A
6.101	Degree of accessibility (accessible/not accessible to the general public) (IEC 60335-2-40)	Accessible to the general public	P
7	MARKING AND INSTRUCTIONS		--
7.1	Rated voltage or voltage range (V).....:	220-240	P
	Symbol for nature of supply including number of phases, unless for single phase operation (IEC 60335-2-40).....:	~	P
	Rated frequency (Hz)	See rating labels	P
	Rated power input (W), or	See rating labels	P
	Rated current (A)	See rating labels	P
	Manufacturer's or responsible vendor's name, trademark or identification mark.....:		P
	Model or type reference.....:	See rating labels	P
	Symbol IEC 60417-5172, for class II appliances		N/A
	IP number, other than IPX0.....:	Outdoor unit: IP24	P
	Symbol IEC 60417-5180, for class III appliances, unless		N/A
	the appliance is operated by batteries only		N/A
	Symbol IEC 60417-5036, for the enclosure of electrically-operated water valves in external hose-sets for connection of an appliance to the water mains, if the working voltage exceeds extra-low voltage		N/A
	Mass of refrigerant or of each refrigerant in blend (except for azeotropic type) (IEC 60335-2-40)	See rating labels	P
	Refrigerant identification (IEC 60335-2-40).....:	R410a	P
	Permissible excessive operating pressure for sanitary hot water heat pumps (IEC 60335-2-40).....:		N/A
	Maximum operating pressure for heat exchanger for hydronic fan coil/air handling units (IEC 60335-2-40/A2)		N/A
	Permissible excessive operating pressure of refrigerant circuit for suction and discharge, if they differ (IEC 60335-2-40).....:	Discharge: 4,2MPa Suction: 1,5MPa	P
	Symbol for degree of protection against ingress of water, other than IPX0 (IEC 60335-2-40).....:	Indoor unit: IPX0 Outdoor unit: IP24	P

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	Separate marking of appliances with all rated characteristics of supplementary heaters (IEC 60335-2-40).....:	No supplementary heaters used.	N/A
	Marking of direction of fluid flow (IEC 60335-2-40)		N/A
	Flame symbol and instruction manual symbol of 7.6 visible when flammable refrigerant employed and following conditions exist (IEC 60335-2-40/A1):		--
	- accessing parts expected to be subjected to maintenance or repair (IEC 60335-2-40/A1);		N/A
	- observing appliance under sale or installed conditions (IEC 60335-2-40/A1);		N/A
	- observing appliance packaging, if appliance charged with refrigerant (IEC 60335-2-40/A1).		N/A
	If flammable refrigerant used, symbols for "read operator's manual", "operator's manual; operating instructions" and "service indicator; read technical manual" (symbols 0790, 1641 and 1659 of ISO 7000) placed on appliance in location visible to persons required to know information. Perpendicular height be at least 10 mm (IEC 60335-2-40/A1 corr.1)		N/A
	Additional warning symbol (flame symbol: B.3.2 of ISO 3864) placed on nameplate of unit near declaration of refrigerant type and charge information. Perpendicular height be at least 10 mm, and symbol need not be in colour (IEC 60335-2-40/A1)		N/A
	Following warning also applied to appliance when flammable refrigerant employed. WARNING Appliance shall be installed, operated and stored in a room with a floor area larger than 'X' m ² (only applies to appliances that are not fixed appliances) (IEC 60335-2-40/A1)		N/A
	Not fixed appliances, minimum room size X specified on appliance. X in marking determined in m ² by procedure described in paragraph 2 of annex GG for unventilated areas and X in marking be 4 if refrigerant charge of appliance is less than m ₁ (see annex GG, paragraph 1.1) (IEC 60335-2-40/A1)		N/A
	Maximum allowable pressure for low-pressure side and high-pressure side marked on product (IEC 60335-2-40/A1)		N/A

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	If not already visible when accessing service port and if service port provided, service port marked to identify type of refrigerant. If refrigerant is flammable, symbol B.3.2 of ISO 3864, be included, without specifying the colour (IEC 60335-2-40/A1)		N/A
7.2	Warning for stationary appliances for multiple supply		N/A
	Warning placed in vicinity of terminal cover		N/A
7.3	Range of rated values marked with the lower and upper limits separated by a hyphen		P
	Different rated values marked with the values separated by an oblique stroke		N/A
7.4	Appliances adjustable for different rated voltages, the voltage setting is clearly discernible		N/A
	Requirement met if frequent changes are not required and the rated voltage to which the appliance is to be adjusted is determined from a wiring diagram		N/A
7.5	Appliances with more than one rated voltage or one or more rated voltage ranges, marked with rated input or rated current for each rated voltage or range, unless		N/A
	the power input is related to the arithmetic mean value of the rated voltage range		P
	Relation between marking for upper and lower limits of rated power input or rated current and voltage is clear		N/A
7.6	Correct symbols used		P
	Flammable refrigerant, warning symbol B.3.2 of ISO 3864, including colour and format, permanently placed on appliance. Perpendicular height of triangle containing "Caution, risk of fire" symbol be at least 30 mm (IEC 60335-2-40/A1)		N/A
	Flammable refrigerant, symbol requiring reference to manual [0790 of ISO 7000], including colour and format, permanently placed on appliance (IEC 60335-2-40/A1 corr.1)		N/A
	Symbol for nature of supply placed next to rated voltage		P
	Symbol for class II appliances placed unlikely to be confused with other marking		N/A
	Units of physical quantities and their symbols according to international standardized system		P

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
7.7	Connection diagram fixed to appliances to be connected to more than two supply conductors and appliances for multiple supply, unless		N/A
	correct mode of connection is obvious		N/A
7.8	Except for type Z attachment, terminals for connection to the supply mains indicated as follows:		--
	- marking of terminals exclusively for the neutral conductor (letter N)		P
	- marking of protective earthing terminals (symbol IEC 60417-5019)		P
	- marking not placed on removable parts		P
7.9	Marking or placing of switches which may cause a hazard		N/A
7.10	Indications of switches on stationary appliances and controls on all appliances by use of figures, letters or other visual means	"Auto/Cool" used for auto test button	P
	This applies also to switches which are part of a control		N/A
	If figures are used, the off position indicated by the figure 0		N/A
	The figure 0 indicates only OFF position, unless no confusion with the OFF position		N/A
7.11	Indication for direction of adjustment of controls		P
7.12	Instructions for safe use provided		P
	Details concerning precautions during user maintenance		P
	Appliances not accessible to general public, classification of clause 6.101 included (IEC 60335-2-40)		N/A
	Appliances using flammable refrigerants, an installation, service and operation manual, either separate or combined manuals, provided and include information given in annex DD (IEC 60335-2-40/A1)		N/A
	The instructions state that:		--
	- the appliance is not to be used by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction		P
	- children being supervised not to play with the appliance		P

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	For a part of class III construction supplied from a detachable power supply unit, the instructions state that the appliance is only to be used with the unit provided		N/A
	Instructions for class III appliances state that it must only be supplied at SELV, unless		N/A
	it is a battery-operated appliance, the battery being charged outside the appliance		N/A
7.12.1	Sufficient details for installation supplied		P
	For an appliance intended to be permanently connected to the water mains and not connected by a hose-set, this is stated		N/A
	Sufficient details for installation or maintenance supplied (IEC 60335-2-40):		--
	- that the appliance shall be installed in accordance with national wiring regulations (IEC 60335-2-40);		P
	- the dimensions of the space necessary for correct installation of the appliance including the minimum permissible distance to adjacent structures (IEC 60335-2-40);		P
	- for appliances with supplementary heaters, the minimum clearance from the appliance to combustible surfaces (IEC 60335-2-40);		N/A
	- a wiring diagram with a clear indication of the connections and wiring to external control devices and supply cord (IEC 60335-2-40);		P
	- the range of external static pressures at which the appliance was tested (add-on heat pumps and appliances with supplementary heaters only) (IEC 60335-2-40);		N/A
	- the method of connection to the appliance to the electrical supply and interconnection of separate components (IEC 60335-2-40);		P
	- indication of which parts of the appliance are suitable for outdoor use, if applicable (IEC 60335-2-40);		P
	- details of type and rating of fuses (IEC 60335-2-40);		P
	- details of supplementary heating elements that may be used in conjunction with the appliance, including fitting instructions either with the appliance or with the supplementary heater (IEC 60335-2-40);		N/A
	- maximum and minimum water or brine operating temperatures (IEC 60335-2-40);		N/A

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	- maximum and minimum water or brine operating pressures (IEC 60335-2-40).		N/A
	Open storage tanks of heat pumps for water heating, accompanied by an instruction sheet which state that the vent shall not be obstructed (IEC 60335-2-40)		N/A
7.12.2	Stationary appliances not fitted with means for disconnection from the supply mains having a contact separation in all poles that provide full disconnection under overvoltage category III, the instructions state that means for disconnection must be incorporated in the fixed wiring in accordance with the wiring rules		P
7.12.3	Insulation of the fixed wiring in contact with parts exceeding 50 K during clause 11; instructions state that the fixed wiring must be protected		N/A
7.12.4	Instructions for built-in appliances:		--
	- dimensions of space		N/A
	- dimensions and position of supporting and fixing		N/A
	- minimum distances between parts and surrounding structure		N/A
	- minimum dimensions of ventilating openings and arrangement		N/A
	- connection to supply mains and interconnection of separate components		N/A
	- allow disconnection of the appliance after installation, by accessible plug or a switch in the fixed wiring, unless		N/A
	a switch complying with 24.3		N/A
7.12.5	Replacement cord instructions, type X attachment with a specially prepared cord		N/A
	Replacement cord instructions, type Y attachment		P
	Replacement cord instructions, type Z attachment		N/A
7.12.6	Caution in the instructions for appliances incorporating a non-self-resetting thermal cut-out that is reset by disconnection of the supply mains, if this cut-out is required to comply with the standard		N/A
7.12.7	Instructions for fixed appliances stating how the appliance is to be fixed		P
7.12.8	Instructions for appliances connected to the water mains:		--
	- max. inlet water pressure (Pa)		N/A
	- min. inlet water pressure, if necessary (Pa)		N/A

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	Instructions concerning new and old hose-sets for appliances connected to the water mains by detachable hose-sets		N/A
7.13	Instructions and other texts in an official language	English	P
7.14	Marking clearly legible and durable, rubbing test as specified		P
7.15	Markings on a main part		P
	Marking clearly discernible from the outside, if necessary after removal of a cover		P
	For portable appliances, cover can be removed or opened without a tool		N/A
	For stationary appliances, name, trademark or identification mark and model or type reference visible after installation		P
	For fixed appliances, name, trademark or identification mark and model or type reference visible after installation according to the instructions		P
	Indications for switches and controls placed on or near the components. Marking not on parts which can be positioned or repositioned in such a way that the marking is misleading		P
	Marking on panel allowed, provided panel in place for intended operation of appliance (IEC 60335-2-40)		N/A
7.16	Marking of a possible replaceable thermal link or fuse link clearly visible with regard to replacing the link		P
7.101	Marking of fuses and overload protective devices, if replaceable (IEC 60335-2-40):		--
	- fuse rated current in amperes, type and rated voltage or (IEC 60335-2-40)		P
	- manufacturer and model of overload protective device (IEC 60335-2-40)		N/A
7.102	Marking for connection with aluminium wire, if necessary (IEC 60335-2-40)		N/A
8	PROTECTION AGAINST ACCESS TO LIVE PARTS		--
8.1	Adequate protection against accidental contact with live parts		P
8.1.1	Requirement applies for all positions, detachable parts removed		P
	Lamps behind a detachable cover not removed, if conditions met		N/A

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	Insertion or removal of lamps, protection against contact with live parts of the lamp cap		N/A
	Use of test probe B of IEC 61032, with a force not exceeding 1 N: no contact with live parts		P
	Use of test probe B of IEC 61032 through openings, with a force of 20 N: no contact with live parts		P
8.1.2	Use of test probe 13 of IEC 61032, with a force not exceeding 1 N, through openings in class 0 appliances and class II appliances/constructions: no contact with live parts	Class II construction	P
	Test probe 13 also applied through openings in earthed metal enclosures having a non-conductive coating: no contact with live parts		P
8.1.3	For appliances other than class II, use of test probe 41 of IEC 61032, with a force not exceeding 1 N: no contact with live parts of visible glowing heating elements		N/A
8.1.4	Accessible part not considered live if:		--
	- safety extra-low a.c. voltage: peak value not exceeding 42,4 V		N/A
	- safety extra-low d.c. voltage: not exceeding 42,4 V	For remote controller	P
	- or separated from live parts by protective impedance		N/A
	If protective impedance: d.c. current not exceeding 2 mA, and		N/A
	a.c. peak value not exceeding 0,7 mA		N/A
	- for peak values over 42,4 V up to and including 450 V, capacitance not exceeding 0,1 μ F		N/A
	- for peak values over 450 V up to and including 15 kV, discharge not exceeding 45 μ C		N/A
	- for peak values over 15kV, the energy in the discharge not exceeding 350 mJ		N/A
8.1.5	Live parts protected at least by basic insulation before installation or assembly:		--
	- built-in appliances		N/A
	- fixed appliances		P
	- appliances delivered in separate units		P
8.2	Class II appliances and constructions constructed so that there is adequate protection against accidental contact with basic insulation and metal parts separated from live parts by basic insulation only	Class II construction	P

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	Only possible to touch parts separated from live parts by double or reinforced insulation		P
9	STARTING OF MOTOR-OPERATED APPLIANCES		--
	Requirements and tests are specified in part 2 when necessary		N/A
10	POWER INPUT AND CURRENT		--
10.1	Power input at normal operating temperature, rated voltage and normal operation not deviating from rated power input by more than shown in table 1...:	(see appended table)	P
	Test carried out at upper and lower limits of the ranges for appliances with one or more rated voltage ranges, unless		N/A
	the rated power input is related to the arithmetic mean value		P
10.2	Current at normal operating temperature, rated voltage and normal operation not deviating from rated current by more than shown in table 2.....:	(see appended table)	P
	Test carried out at upper and lower limits of the ranges for appliances with one or more rated voltage ranges, unless		N/A
	the rated current is related to the arithmetic mean value of the range		P
11	HEATING		--
11.1	No excessive temperatures in normal use (IEC 60335-2-40)		P
	Compliance is checked by the tests of annex C, if (IEC 60335-2-40):		--
	- temperature of motor winding exceeds values shown in table 3 (IEC 60335-2-40)		N/A
	- there is doubt about classification of insulation system of the motor (IEC 60335-2-40)		N/A
11.2	Placing and mounting of appliance (IEC/EN 60335-2-40):		--
	- clearances to adjacent surfaces (IEC 60335-2-40);		P
	- flow rates for liquid source or sink equipment be minimum, except for fan coils where flow rates and liquid temperatures be maximum (IEC 60335-2-40/A2);		N/A
	- static pressures (IEC 60335-2-40);		N/A
	- means of adjusting the flow, flow for tests be minimum obtainable (IEC 60335-2-40);		P
	- adjustable limit controls set at maximum cut-out setting and minimum differential (IEC 60335-2-40).		P

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	Appliances with supplementary heaters, use test casing of clause 11.9 (IEC 60335-2-40)		N/A
11.2.1	Appliances with supplementary heaters, inlet duct connected to inlet air opening (IEC 60335-2-40)		N/A
11.2.2	Appliance without supplementary heaters, air outlet used (IEC 60335-2-40)		N/A
11.3	Temperature rise determine by thermocouples or resistance method (IEC 60335-2-40)	Resistance method: fan motor, transformer Thermocouples method: other parts	P
11.4	Test performed at supply voltage between 0,94 and 1,06 times the rated voltage (IEC 60335-2-40)	206,8V~ and 243,8V~	P
	Heating elements energized at voltage which gives an electrical input of 1,15 times maximum rated power input (IEC 60335-2-40)		N/A
11.5	Test conducted in heating mode and cooling mode, if both exist (IEC 60335-2-40)		N/A
	All supplementary heating elements operative simultaneously (IEC 60335-2-40)		N/A
11.6	Defrost test in most unfavourable conditions, if needed (IEC/EN 60335-2-40)		N/A
11.7	Appliances operated continuously until steady conditions except for defrost tests (IEC 60335-2-40)		P
11.8	Temperatures not exceeding values of table 3 (IEC 60335-2-40/A2)	(See appended tables)	P
	Protective devices do not operate (IEC 60335-2-40)		P
	Sealing compound not flowing out (IEC 60335-2-40)		P
	Temperature of air in outlet duct not exceed 90 °C (IEC 60335-2-40)		P
11.9	Test casing and installation of appliances in accordance with manufacturer's instructions (IEC 60335-2-40)		N/A
	Glass fibre insulation for appliances without indication of minimum clearances according to manufacturer; thermocouple in contact with enclosure (IEC 60335-2-40)		N/A
13	LEAKAGE CURRENT AND ELECTRIC STRENGTH AT OPERATING TEMPERATURE		--
13.1	Leakage current not excessive and electric strength adequate		P
	Heating appliances operated at 1,15 times the rated power input (W)		N/A

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	Motor-operated appliances and combined appliances supplied at 1,06 times the rated voltage (V).....:	243,8 V~	P
	Protective impedance and radio interference filters disconnected before carrying out the tests		P
13.2	For class 0, class II and class III appliances, leakage current measured by means of the circuit described in figure 4 of IEC 60990		N/A
	For other appliances, a low impedance ammeter may be used		P
	Leakage current measurements: (IEC 60335-2-40)	(see appended table)	P
13.3	The appliance is disconnected from the supply		P
	Electric strength tests according to table 4.....:	(see appended table)	P
	No breakdown during the tests		P
14	TRANSIENT OVERVOLTAGES		--
	Appliances withstand the transient over-voltages to which they may be subjected		P
	Clearances having a value less than specified in table 16 subjected to an impulse voltage test, the test voltage specified in table 6:	(see appended table)	N/A
	No flashover during the test, unless		N/A
	of functional insulation if the appliance complies with clause 19 with the clearance short-circuited		N/A
15	MOISTURE RESISTANCE		--
15.1	Enclosure provides degree of moisture protection against ingress of water (rain, overflow from drain pan or defrosting), tests of clause 15.2, 15.3, 11.6 and 16) (IEC 60335-2-40)		P
	Motor-compressor not operated and detachable parts removed during tests of clause 15.2 and 15.3 (IEC 60335-2-40/A2)		P
15.2	Tests in accordance with IEC 60529 in appliances other than IPX0, as specified (IEC 60335-2-40).....:	Outdoor unit: IP24	P
15.3	Drain pan filled to brim and subjected to continuous overflow and fan(s) switched on (IEC 60335-2-40)		P
15.101	Spillage test as specified (IEC 60335-2-40/A2)		N/A
	After spillage completed, appliance withstand test of clause 16 (IEC 60335-2-40/A2)		N/A
16	LEAKAGE CURRENT AND ELECTRIC STRENGTH		--

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
16.1	Leakage current not excessive and electric strength adequate		P
	Protective impedance disconnected from live parts before carrying out the tests		P
	Tests carried out at room temperature and not connected to the supply		P
16.2	Single-phase appliances: test voltage 1,06 times rated voltage (V)	243,8 V~	P
	Three-phase appliances: test voltage 1,06 times rated voltage divided by $\sqrt{3}$ (V)		N/A
	Leakage current measurements (IEC 60335-2-40)	(see appended table)	P
	Limit values doubled if:		--
	- all controls have an off position in all poles, or		N/A
	- the appliance has no control other than a thermal cut-out, or		N/A
	- all thermostats, temperature limiters and energy regulators do not have an off position, or		N/A
	- the appliance has radio interference filters		N/A
	With the radio interference filters disconnected, the leakage current do not exceed limits specified	(see appended table)	P
16.3	Electric strength tests according to table 7	(see appended table)	P
	Test voltage applied between the supply cord and inlet bushing and cord guard and cord anchorage as specified	(see appended table)	P
	No breakdown during the tests		P
17	OVERLOAD PROTECTION OF TRANSFORMERS AND ASSOCIATED CIRCUITS		--
	No excessive temperatures in transformer or associated circuits in event of short-circuits likely to occur in normal use	(see appended table)	P
	Appliance supplied with 1,06 or 0,94 times rated voltage under the most unfavourable short-circuit or overload likely to occur in normal use (V)	243,8 V~	P
	Basic insulation is not short-circuited		P
	Temperature rise of insulation of the conductors of safety extra-low voltage circuits not exceeding the relevant value specified in table 3 by more than 15 K		N/A
	Temperature of the winding not exceeding the value specified in table 8		P

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	However, limits do not apply to fail-safe transformers complying with sub-clause 15.5 of IEC 61558-1		N/A
18	ENDURANCE		--
	Requirements and tests are specified in part 2 when necessary		N/A
19	ABNORMAL OPERATION		--
19.1	The risk of fire or mechanical damage under abnormal or careless operation obviated (tests 19.2-19.14) (IEC 60335-2-40)		P
	Failure of transfer medium flow or of any control device not result in a hazard (IEC 60335-2-40)		P
	Electronic circuits so designed and applied that a fault will not render the appliance unsafe (electric shock, fire or mechanical hazard, dangerous malfunction) (test 19.11 and 19.12) (IEC 60335-2-40)		P
19.2	Test of appliance with motor rotors, other than motor-compressors, operated for 15 days (360 h) or until protection device opens circuit (IEC 60335-2-40)		P
	Insulation of motor windings (IEC 60335-2-40)	See attached components list	P
	Temperature of enclosure does not exceed (°C) (IEC 60335-2-40).....	(See appended table)	P
	Temperature of the windings does not exceed the values shown in the table ; temperature (°C) (IEC 60335-2-40).....	(See appended table)	P
	Electric strength test as specified in 16.3, 72 h after the beginning of the test (IEC 60335-2-40)		P
	30 mA residual current device does not open (IEC 60335-2-40)		P
	At the end, leakage current between windings and enclosure does not exceed 2 mA (IEC 60335-2-40)		P
19.3	Motor-compressor complies with IEC 60335-2-34 (IEC 60335-2-40)		P
	Test of motor-compressor with rotor locked as specified in clause 19.101 of IEC 60335-2-34 and comply with 19.104 of that standard (IEC 60335-2-40)		N/A
19.4	Test of three-phase motors operated under conditions of clause 11 with one phase disconnected until steady conditions or protective device operates (IEC 60335-2-40)		N/A

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
19.5	Test of appliance with heat transfer medium flow of the outdoor heat exchanger restricted or shut off when reaching steady conditions (IEC 60335-2-40)		P
	Test of appliance with heat transfer flow of the indoor heat exchanger restricted or shut off when reaching steady conditions (IEC 60335-2-40)		P
	Disconnection of motor common to both the outdoor and the indoor heat exchangers when reaching steady conditions (IEC 60335-2-40)		N/A
19.6	Test of appliances using water as heat transfer medium (IEC 60335-2-40)		N/A
19.7	Test of air to air appliances at rated voltage or at the upper limit of the rated voltage range. Dry-bulb temperature is 5 K below values specified by manufacturer (IEC 60335-2-40)		P
	Test with the dry-bulb temperature 10 K over the values specified by manufacturer (IEC 60335-2-40)		P
19.8	Test of appliances with supplementary heaters (IEC 60335-2-40)		N/A
19.9	Test at temperature permitting continuous operation of the motor-compressor and electric heating elements at same time (IEC 60335-2-40)		N/A
19.10	Test of appliance with any defect which expected during normal use (IEC 60335-2-40)	(see appended table)	P
19.10.101	Test of clause 19.10 repeated on class 0I appliances and class I appliances incorporating tubular sheathed or embedded heating elements (IEC 60335-2-40/A2)		N/A
	However, controls not short-circuited but one end of element connected to sheath of heating element (IEC 60335-2-40/A2)		N/A
	Test repeated with polarity of supply to appliance reversed and with other end of element connected to sheath (IEC 60335-2-40/A2)		N/A
	Test not carried out on appliances intended to permanently connected to fixed wiring and on appliances where an all-pole disconnection occurs during test of clause 19.10 (IEC 60335-2-40/A2)		N/A
19.11	Electronic circuits, compliance checked by evaluation of the fault conditions specified in clause 19.11.2 for all circuits or parts of circuits (IEC 60335-2-40), unless		P
	they comply with conditions specified in clause 19.11.1 (IEC 60335-2-40)		N/A

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	Windings temperature not exceeding values shown in table 8 (IEC 60335-2-40)		P
	Appliance comply with conditions of clause 19.14 (IEC 60335-2-40)		P
	Appliance withstands test: a conductor becomes open circuited and three conditions are met (IEC 60335-2-40)		N/A
19.11.1	Before applying the fault conditions a) to f) in 19.11.2, it is checked if circuits or parts of circuit meet both of following conditions (IEC 60335-2-40):		--
	- electronic circuit is low-power circuit, that is, maximum power at low-power points not exceed 15 W according to tests specified (IEC 60335-2-40)		N/A
	- protection against electric shock, fire hazard, mechanical hazard or dangerous malfunction in other parts of appliance does not rely on correct functioning of electronic circuit (IEC 60335-2-40)		N/A
19.11.2	Fault conditions applied one at a time, appliance operated under conditions specified in clause 11, but supplied at rated voltage, duration of tests as specified (IEC 60335-2-40):		--
	a) short circuit of creepage distances and clearances between live parts of different potential, if these distances less than values specified in clause 29.1, unless relevant part is adequately encapsulated (IEC 60335-2-40)	(See appended table)	P
	b) open circuit at terminals of any component (IEC 60335-2-40)	(See appended table)	P
	c) short circuit if capacitors, unless they comply with IEC 60384-14 (IEC 60335-2-40)	(See appended table)	P
	d) short circuit of any two terminals of an electronic component, other than integrated circuits. This fault condition not applied between circuits of an optocoupler (IEC 60335-2-40)	(See appended table)	P
	e) failure of triacs in diode mode (IEC 60335-2-40)	(See appended table)	P
	f) failure of an integrated circuit. Possible hazardous situations of appliance assessed to ensure that safety not rely on correct functioning of such component (IEC 60335-2-40)	(See appended table)	P
	Short-circuit of low-power circuits (IEC 60335-2-40)		N/A
	Duration of tests (IEC 60335-2-40):		--
	- as specified in clause 11.7 but only for one operating cycle, if fault cannot recognised by user (IEC 60335-2-40);		P

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	- as specified in clause 19.2, if fault can recognised by user (IEC 60335-2-40);		P
	- until steady conditions established (IEC 60335-2-40).		P
	Test ended if interruption of supply occurs within the appliance (IEC 60335-2-40)		P
	If electronic circuit operates to ensure compliance with clause 19, relevant test repeated with single fault a) to f) simulated (IEC 60335-2-40)		P
	Fault condition f) applied to encapsulated or similar components (IEC 60335-2-40)		P
	PTC's, NTC's and VDR's resistors not short-circuited if used as specified by manufacturer (IEC 60335-2-40)		P
19.12	If safety of appliance for any of fault conditions specified in clause 19.11.2 depends on operation of miniature fuse-link complying with IEC 60127, test repeated with fuse-link replaced by an ammeter (IEC 60335-2-40)		P
	Current $\leq 2,1$ times rated current of fuse-link, circuit not adequately protected (fuse-link short-circuited) (IEC 60335-2-40)		N/A
	Current $\geq 2,75$ times rated current of fuse-link, circuit adequately protected (IEC 60335-2-40)		P
	Current $\geq 2,1$ and $\leq 2,75$ times rated current, fuse-link short-circuited and test carried out during specified time (IEC 60335-2-40)		N/A
19.13	Appliances with PTC heating elements test as specified (IEC 60335-2-40)		N/A
19.14	During tests of clause 19.2 to 19.10.101 and 19.11, 19.12 and 19.13 if appropriate, appliances not emit flames, molten metal, poisonous or ignitable gas in hazardous amounts (IEC 60335-2-40/A2)		P
	Enclosures not deform (IEC 60335-2-40)		P
	Temperature rise not exceed values shown in table 9 (IEC 60335-2-40)	(See appended table)	P
	Electric strength test, test voltage as specified in table 4 (IEC 60335-2-40)		P
19.15	For appliances with a mains voltage selector switch, the switch is set to the lowest rated voltage position and the highest value of rated voltage is applied		N/A
19.101	All appliances provided with supplementary heaters and free air discharge subjected to specified test in each mode of operation (IEC 60335-2-40/A2)		N/A

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	During test temperature not exceed 150 °C but an overshoot of 25 °C is permitted during first hour (IEC 60335-2-40/A2)		N/A
20	STABILITY AND MECHANICAL HAZARDS		--
20.1	Appliances having adequate stability		N/A
	Tilting test through an angle of 10°, appliance placed on an inclined plane/horizontal support, not connected to the supply mains; appliance does not overturn		N/A
	Tilting test repeated on appliances with heating elements, angle of inclination increased to 15°		N/A
	Possible heating test in overturned position; temperature rise does not exceed values shown in table 9		N/A
20.2	Moving parts adequately arranged or enclosed as to provide protection against personal injury	Outdoor fan blades are sufficiently protected. Peripheral speed of indoor fan blades < 15m/s.	P
	Protective enclosures, guards and similar parts are non-detachable, and		P
	have adequate mechanical strength		P
	Enclosures that can be opened by overriding an interlock are considered to be detachable parts		P
	Self-resetting thermal cut-outs and overcurrent protective devices not causing a hazard by unexpected closure	Used for motor-compressor and indoor fan motor	P
	Not possible to touch dangerous moving parts with the test probe described		P
21	MECHANICAL STRENGTH		--
21.1	Appliance has adequate mechanical strength and is constructed as to withstand rough handling		P
	Checked by applying 3 blows to every point of the enclosure like to be weak, in accordance with test Ehb of IEC 60068-2-75, spring hammer test, with an impact energy of 0,5 J	(see appended table)	P
	The appliance shows no damage impairing compliance with this standard, and		P
	compliance with 8.1, 15.1 and clause 29 not impaired		P
	If doubt, supplementary or reinforced insulation subjected to the electric strength test of 16.3		N/A
	If necessary, repetition of groups of three blows on a new sample		N/A

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	Safety requirements specified in annex EE applied. Pressure test in annex EE applies to parts other than pressure vessels (IEC 60335-2-40/A1)		P
	Safety requirements of ISO 5149 applied (IEC 60335-2-40/A2)		P
21.2	Accessible parts of solid insulation having strength to prevent penetration by sharp implements		P
	Test not applicable if the thickness of supplementary insulation is at least 1 mm and reinforced insulation at least 2 mm		P
	The insulation is tested as specified, and does withstand the electric strength test of 16.3		P
22	CONSTRUCTION		--
22.1	Appliance marked with the first numeral of the IP system, relevant requirements of IEC 60529 are fulfilled		P
22.2	Stationary appliance: means to ensure all-pole disconnection from the supply being provided:		--
	- a supply cord fitted with a plug, or		N/A
	- a switch complying with 24.3, or		N/A
	- a statement in the instruction sheet that a disconnection incorporated in the fixed wiring is to be provided, or		P
	- an appliance inlet		N/A
	Single-pole switches and single-pole protective devices for the disconnection of heating elements in single-phase, permanently connected class 01 and class I appliances, connected to the phase conductor		N/A
22.3	Appliance provided with pins: no undue strain on socket-outlets		N/A
	Applied torque not exceeding 0,25 Nm		N/A
	Pull force of 50 N to each pin after the appliance has being placed in the heating cabinet; when cooled to room temperature the pins are not displaced by more than 1 mm		N/A
	Each pin subjected to a torque of 0,4 Nm; the pins are not rotating, unless		N/A
	rotating does not impair compliance with this standard		N/A
22.4	Appliance for heating liquids and appliance causing undue vibration not provided with pins for insertion into socket-outlets		N/A

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
22.5	No risk of electric shock when touching the pins of the plug, for appliances having a capacitor with rated capacitance exceeding 0,1 μ F, the appliance being disconnected from the supply at the instant of voltage peak		N/A
	Voltage not exceeding 34 V (V).....:		N/A
22.6	Electrical insulation not affected by condensing water or leaking liquid		P
	Electrical insulation of class II appliances not affected if a hose ruptures or seal leaks		N/A
	In case of doubt, test as described		N/A
	Electrical insulation not affected by snow penetration to appliance enclosure (IEC 60335-2-40)		N/A
22.7	Adequate safeguards against the risk of excessive pressure in appliances containing liquid or gases or having steam-producing devices		N/A
22.8	Electrical connections not subject to pulling during cleaning of compartments to which access can be gained without the aid of a tool, and that are likely to be cleaned in normal use		P
22.9	Insulation, internal wiring, windings, commutators and slip rings not exposed to oil, grease or similar substances, unless		N/A
	the substance has adequate insulating properties		P
22.10	Not possible to reset voltage-maintained non-self-resetting thermal cut-outs by the operation of an automatic switching device incorporated within the appliance, if:		N/A
	- a non-self-resetting thermal cut-out is required by the standard, and		N/A
	- a voltage maintained non-self-resetting thermal cut-out is used to meet it		N/A
	Non-self-resetting thermal motor protectors have a trip-free action, unless		N/A
	they are voltage maintained		N/A
	Reset buttons of non-self-resetting controls so located or protected that accidental resetting is unlikely		N/A
22.11	Reliable fixing of non-detachable parts that provide the necessary degree of protection against electric shock, moisture or contact with moving parts		P
	Obvious locked position of snap-in devices used for fixing such parts		P

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	No deterioration of the fixing properties of snap-in devices used in parts that are likely to be removed during installation or servicing		P
	Tests as described		P
22.12	Handles, knobs etc. fixed in a reliable manner		N/A
	Fixing in wrong position of handles, knobs etc. indicating position of switches or similar components not possible		N/A
	Axial force 15 N applied to parts, the shape being so that an axial pull is unlikely to be applied		N/A
	Axial force 30 N applied to parts, the shape being so that an axial pull is likely to be applied		N/A
22.13	Unlikely that handles, when gripped as in normal use, make the operator's hand touch parts having a temperature rise exceeding the value specified for handles which are held for short periods only		N/A
22.14	No ragged or sharp edges creating a hazard for the user in normal use, or during user maintenance		P
	No exposed pointed ends of self-tapping screws or other fasteners, likely to be touched by the user in normal use or during user maintenance		P
22.15	Storage hooks and the like for flexible cords smooth and well rounded		N/A
22.16	Automatic cord reels cause no undue abrasion or damage to the sheath of the flexible cord, no breakage of conductors strands and no undue wear of contacts		N/A
	Cord reel tested with 6000 operations, as specified		N/A
	Electric strength test of 16.3, voltage of 1000 V applied		N/A
22.17	Spacers not removable from the outside by hand or by means of a screwdriver or a spanner		N/A
22.18	Current-carrying parts and other metal parts resistant to corrosion		P
22.19	Driving belts not relied upon to provide the required level of insulation, unless		N/A
	constructed to prevent inappropriate replacement		N/A
22.20	Direct contact between live parts and thermal insulation effectively prevented, unless		N/A
	material used is non-corrosive, non-hygroscopic and non-combustible		P

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
22.21	Wood, cotton, silk, ordinary paper and fibrous or hygroscopic material not used as insulation, unless		P
	impregnated		N/A
	This requirement does not apply to magnesium oxide and mineral ceramic fibres used for the electrical insulation of heating elements		N/A
22.22	Appliances not containing asbestos		P
22.23	Oils containing polychlorinated biphenyl (PCB) not used		P
22.24	Bare heating elements adequately supported to prevent contact with accessible metal parts in case of rupture or sagging (IEC 60335-2-40)		N/A
	Bare heating elements only used with metal enclosures (wood or composite enclosures not allowed) (IEC 60335-2-40)		N/A
22.25	Sagging heating conductors, except in class III appliances or class III constructions that do not contain live parts, cannot come into contact with accessible metal parts		N/A
22.26	For class III constructions the insulation between parts operating at safety extra-low voltage and other live parts complies with the requirements for double or reinforced insulation		N/A
22.27	Parts connected by protective impedance separated by double or reinforced insulation		N/A
22.28	Metal parts of class II appliances conductively connected to gas pipes or in contact with water, separated from live parts by double or reinforced insulation		N/A
22.29	Class II appliances permanently connected to fixed wiring so constructed that the required degree of access to live parts is maintained after installation		N/A
22.30	Parts serving as supplementary or reinforced insulation fixed so that they cannot be removed without being seriously damaged, or		P
	so constructed that they cannot be replaced in an incorrect position, and so that if they are omitted, the appliance is rendered inoperable or manifestly incomplete		P
22.31	Neither clearances nor creepage distances over supplementary and reinforced insulation reduced below values specified in clause 29 as a result of wear		P

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	Neither clearances nor creepage distances between live parts and accessible parts reduced below values for supplementary insulation if wires, screws etc. become loose		P
22.32	Supplementary and reinforced insulation constructed or protected against pollution so that clearances or creepage distances are not reduced below the values in clause 29		P
	Supplementary insulation of natural or synthetic rubber resistant to ageing, or arranged and dimensioned so that creepage distances are not reduced below values specified in 29.2		N/A
	Ceramic material not tightly sintered, similar materials or beads alone not used as supplementary or reinforced insulation		N/A
	Insulating material in which heating conductors are embedded is considered to be basic insulation, not reinforced insulation		N/A
	Oxygen bomb test at 70 °C for 96 h and 16 h at room temperature		N/A
22.33	Conductive liquids that are or may become accessible in normal use and conductive liquids that are in contact with unearthed accessible metal parts are not in direct contact with live parts		P
	Electrodes not used for heating liquids		N/A
	For class II constructions, conductive liquids that are or may become accessible in normal use and conductive liquids that are in contact with unearthed accessible metal parts, not in direct contact with basic or reinforced insulation, unless		N/A
	the reinforced insulation consists of at least 3 layers		N/A
	For class II constructions, conductive liquids which are in contact with live parts, not in direct contact with reinforced insulation, unless		N/A
	the reinforced insulation consists of at least 3 layers		N/A
	An air layer not used as basic or supplementary insulation in a double insulation system if likely to be bridged by leaking liquid		N/A
22.34	Shafts of operating knobs, handles, levers etc. not live, unless		N/A
	the shaft is not accessible when the part is removed		N/A
22.35	For other than class III constructions, handles, levers and knobs, held or actuated in normal use, not becoming live in the event of a failure of basic insulation		N/A

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	Such parts being of metal, and their shafts or fixings are likely to become live in the event of a failure of basic insulation, are either adequately covered by insulation material or their accessible parts are separated from their shafts or fixings by supplementary insulation		N/A
	This requirement does not apply to handles, levers and knobs on stationary appliances, other than those of electrical components, provided they are reliably connected to an earthing terminal or earthing contact, or separated from live parts by earthed metal		N/A
	Insulating material covering metal handles, levers and knobs withstand the electric strength test of 16.3 for supplementary insulation		N/A
22.36	For appliances other than class III, handles continuously held in the hand in normal use so constructed that when gripped as in normal use, the operators hand is not likely to touch metal parts, unless		N/A
	they are separated from live parts by double or reinforced insulation		N/A
22.37	Capacitors in class II appliances not connected to accessible metal parts and their casings, if of metal, separated from accessible metal parts by supplementary insulation, unless		N/A
	the capacitors comply with 22.42		N/A
22.38	Capacitors not connected between the contacts of a thermal cut-out		P
22.39	Lamp holders used only for the connection of lamps		N/A
22.40	Motor-operated appliances and combined appliances intended to be moved while in operation, or having accessible moving parts, fitted with a switch to control the motor. The actuating member of the switch being easily visible and accessible		N/A
	If the appliance cannot operate continuously, automatically or remotely without giving rise to a hazard, appliances for remote operation being fitted with a switch for stopping the operation. The actuating member of the switch being easily visible and accessible		N/A
22.41	No components, other than lamps, containing mercury		P
22.42	Protective impedance consisting of at least two separate components		N/A

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	Values specified in 8.1.4 not exceeded if any one of the components are short-circuited or open-circuited		N/A
	Resistors checked by the test of 14.1 a) in IEC 60065		N/A
	Capacitors checked by the tests for class Y capacitors in IEC 60384-14		N/A
22.43	Appliances adjustable for different voltages, accidental changing of the setting of the voltage unlikely to occur		N/A
22.44	Appliances not having an enclosure that is shaped or decorated like a toy		P
22.45	When air is used as reinforced insulation, clearances not reduced below the values specified in 29.1.3 due to deformation as a result of an external force applied to the enclosure		P
22.46	For programmable protective electronic circuits used to ensure compliance with the standard, the software contains measures to control the fault/error conditions in table R.1		N/A
	Software that contains measures to control the fault/error conditions specified in table R.2 is to be specified in parts 2 for particular constructions or to address specific hazards		N/A
	These requirements are not applicable to software used for functional purpose or compliance with clause 11		N/A
22.47	Appliances connected to the water mains withstand the water pressure expected in normal use		N/A
	No leakage from any part, including any inlet water hose		N/A
22.48	Appliances connected to the water mains constructed to prevent backsiphonage of non-potable water		N/A
22.49	For remote operation, the duration of operation is to be set before the appliance can be started, unless		N/A
	the appliance switches off automatically or can operate continuously without hazard		N/A
22.50	Controls incorporated in the appliance take priority over controls actuated by remote operation		N/A
22.51	There is a control on the appliance manually adjusted to the setting for remote operation before the appliance can be operated in this mode		N/A

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	There is a visual indication showing that the appliance is adjusted for remote operation		N/A
	These requirements not necessary on appliances that can operate as follows, without giving rise to a hazard:		--
	- continuously, or		N/A
	- automatically, or		N/A
	- remotely		N/A
22.52	Socket-outlets on appliances accessible to the user in accordance with the socket-outlet system used in the country in which the appliance is sold		N/A
22.101	Appliances intended to be fixed, securely fixed (IEC 60335-2-40)		P
22.102.1	At least two thermal cut-outs in appliances with supplementary heating elements for air (first one be self-resetting and other non-self-resetting thermal cut-out) (IEC 60335-2-40/A2)		N/A
22.102.2	Appliances provided with supplementary heaters for water incorporate non-self-resetting thermal cut-out, providing all-pole disconnection that operates separately from water thermostats (IEC 60335-2-40/A2)		N/A
	However, for appliances intended to be connected to fixed wiring, the neutral conductor need not be disconnected (IEC 60335-2-40/A2)		N/A
22.102.3	Thermal cut-outs of capillary type open in event of leakage from capillary tube (IEC 60335-2-40/A2)		N/A
22.103	Non-self-resetting cut-outs independent of other control devices (IEC 60335-2-40)		N/A
22.104	Containers of sanitary hot water heat pumps withstand twice permissible operating pressure in closed containers (IEC 60335-2-40) or		N/A
	0,15 MPa in open containers (IEC 60335-2-40)		N/A
	without leakage or rupture (IEC 60335-2-40)		N/A
22.105	Air or vapour cushion in closed containers not exceeding 10 % (IEC 60335-2-40)		N/A
22.106	Pressure relief devices operating at 0,1 MPa over permissible operating pressure (IEC 60335-2-40)		N/A
22.107	Water outlet systems of open containers free from obstruction causing over-pressure (IEC 60335-2-40)		N/A
	Vented containers of sanitary hot water heat pumps always open to the atmosphere through appropriate aperture (IEC 60335-2-40)		N/A

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
22.108	Not vented open containers subjected to test in accordance with clause 22.104 to vacuum of 33 kPa for 15 min (IEC 60335-2-40)		N/A
	Container show no deformation which result in a hazard (IEC 60335-2-40)		N/A
22.109	Replacement of non-self-resetting thermal cut-outs does not damage other connections (IEC 60335-2-40)		N/A
22.110	Non-self-resetting thermal cut-outs operate without short-circuiting live parts of different potential and without causing contact between live parts and enclosure (IEC 60335-2-40)		N/A
	Test repeated five times without blowing 3 A fuse which connects appliance to earth (IEC 60335-2-40)		N/A
	Electric strength test as specified in clause 16.3 for supplementary heating elements (IEC 60335-2-40)		N/A
22.111	Manual resetting of thermostats not necessary after power supply interruption (IEC 60335-2-40)		N/A
22.112	Construction of refrigerating system comply with requirements of Section 3 of ISO 5149 (IEC 60335-2-40/A1)		P
22.113	Flammable refrigerant used, refrigerant tubing protected or enclosed to avoid mechanical damage (IEC 60335-2-40/A1)		N/A
	Tubing protected to extent that it will not be handled or used for carrying during moving of product (IEC 60335-2-40/A1)		N/A
	Tubing located within confines of cabinet considered to be protected from mechanical damage (IEC 60335-2-40/A1)		N/A
22.114	Flammable refrigerant used, low temperature solder alloys, such as lead/tin alloys, not acceptable for pipe connections (IEC 60335-2-40/A1)		N/A
22.115	Total refrigerant mass (M) of all refrigerating systems within appliance employing flammable refrigerants, not exceed m ₃ defined in annex GG (IEC 60335-2-40/A1)		N/A
22.116	Appliances using flammable refrigerants constructed that any leaked refrigerant not flow or stagnate so as to cause fire or explosion hazard in areas within appliance where electrical components, which could be a source of ignition and which could function under normal conditions or in event of leak, fitted (IEC 60335-2-40/A1)		N/A

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	Separate components, such as thermostats, which charged with less than 0,5 g of flammable gas not considered to cause fire or explosion hazard in event of leakage of gas within component itself (IEC 60335-2-40/A1)		N/A
	All electrical components that could be a source of ignition and which could function under normal conditions or in the event of a leak, comply with one of the following (IEC 60335-2-40/A1):		--
	- IEC 60079-15:2001, Cl. 9 to 26, for group IIA gases or the refrigerant used or an applicable standard that makes electrical components suitable for use in Zone 2, 1 or 0 as defined in IEC 60079-14 (IEC 60335-2-40/A1)		N/A
	- Not be located in an area where a potentially flammable gas mixture will accumulate as demonstrated by the test of annex FF (IEC 60335-2-40/A1)		N/A
	- Be located in an enclosure. The enclosure containing the electrical components comply with IEC 60079-15:2001 for enclosures suitable for use with group IIA gases or the refrigerant used (IEC 60335-2-40/A1)		N/A
22.117	Temperatures on surfaces that exposed to leakage of flammable refrigerants not exceed auto-ignition temperature of refrigerant reduced by 100 K; some typical values given in annex BB (IEC 60335-2-40/A1)		N/A
22.118	Flammable refrigerant used, all appliances charged with refrigerant at manufacturing location or charged on site as recommended by manufacturer (IEC 60335-2-40/A1)		N/A
	Part of appliance that charged on site, which requires brazing or welding in installation not shipped with flammable refrigerant charge. Joints made in installation between parts of refrigerating system, with at least one part charged, made in accordance with following (IEC 60335-2-40/A1):		--
	- A brazed, welded, or mechanical connection shall be made before opening the valves to permit refrigerant to flow between the refrigerating system parts. A vacuum valve shall be provided to evacuate the interconnecting pipe and/or any uncharged refrigerating system part (IEC 60335-2-40/A1)		N/A
	- Reusable mechanical connectors and flared joints are not allowed indoors (IEC 60335-2-40/A1)		N/A
	- Refrigerant tubing shall be protected or enclosed to avoid damage (IEC 60335-2-40/A1)		N/A

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	Flexible refrigerant connectors (such as connecting lines between the indoor and outdoor unit) that may be displaced during normal operations shall be protected against mechanical damage (IEC 60335-2-40/A1)		N/A
23	INTERNAL WIRING		--
23.1	Wireways smooth and free from sharp edges		P
	Wires protected against contact with burrs, cooling fins etc.		P
	Wire holes in metal well-rounded or provided with bushings		P
	Wiring effectively prevented from coming into contact with moving parts		P
23.2	Beads etc. on live wires cannot change their position, and are not resting on sharp edges		N/A
	Beads inside flexible metal conduits contained within an insulating sleeve		N/A
23.3	Electrical connections and internal conductors movable relatively to each other not exposed to undue stress		P
	Flexible metallic tubes not causing damage to insulation of conductors		N/A
	Open-coil springs not used		N/A
	Adequate insulating lining provided inside a coiled spring, the turns of which touch one another		N/A
	No damage after 10 000 flexings for conductors flexed during normal use, or		N/A
	100 flexings for conductors flexed during user maintenance		P
	Electric strength test of 16.3, 1000 V between live parts and accessible metal parts		P
	Not more than 10 % of the strands of any conductor broken, and		P
	not more than 30 % for wiring supplying circuits that consume no more than 15 W		N/A
23.4	Bare internal wiring sufficiently rigid and fixed		N/A
23.5	The insulation of internal wiring subjected to the supply mains voltage withstanding the electrical stress likely to occur in normal use		P
	Basic insulation electrically equivalent to the basic insulation of cords complying with IEC 60227 or IEC 60245, or		P

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	no breakdown when a voltage of 2000 V is applied for 15 min between the conductor and metal foil wrapped around the insulation		P
23.6	Sleeving used as supplementary insulation on internal wiring retained in position by clamping at both ends, or		P
	be such that it can only be removed by breaking or cutting		P
23.7	The colour combination green/yellow only used for earthing conductors		P
23.8	Aluminium wires not used for internal wiring		P
23.9	Stranded conductors not consolidated by soldering where they are subjected to contact pressure, unless		P
	the contact pressure is provided by spring terminals		N/A
23.10	The insulation and sheath of internal wiring, incorporated in external hoses for the connection of an appliance to the water mains, at least equivalent to that of light polyvinyl chloride sheathed flexible cord (60227 IEC 52)		N/A
24	COMPONENTS		--
24.1	Components comply with safety requirements in relevant IEC standards		P
	List of components	(see appended table)	P
	If components have not been tested and found to comply with relevant IEC standard for the number of cycles specified, they are tested in accordance with 24.1.1 to 24.1.9		N/A
	For components mentioned in 24.1.1 to 24.1.9 no additional tests specified in the relevant component standard are necessary other than those specified in 24.1.1 to 24.1.9		N/A
	Components not tested and found to comply with relevant IEC standard and components not marked or not used in accordance with its marking, tested under the conditions occurring in the appliance		P
	Lampholders and starterholders that have not being tested and found to comply with the relevant IEC standard, tested as a part of the appliance and additionally according to the gauging and interchangeability requirements of the relevant IEC standard		N/A

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	No additional tests specified for nationally standardized plugs such as those detailed in IEC/TR 60083 or connectors complying with the standard sheets of IEC 60320-1 and IEC 60309		N/A
	Motor-compressors not tested according to IEC 60335-2-34 (not necessary to meet all requirements of IEC 60335-2-34) (IEC 60335-2-40)		N/A
24.1.1	Capacitors likely to be permanently subjected to the supply voltage and used for radio interference suppression or for voltage dividing, complying with IEC 60384-14		P
	If the capacitors have to be tested, they are tested according to annex F		N/A
24.1.2	Safety isolating transformers complying with IEC 61558-2-6		N/A
	If they have to be tested, they are tested according to annex G		N/A
24.1.3	Switches complying with IEC 61058-1, the number of cycles of operation being at least 10 000		N/A
	If they have to be tested, they are tested according to annex H		N/A
	If the switch operates a relay or contactor, the complete switching system is subjected to the test		N/A
	If the switch only operates a motor starting relay complying with IEC 60730-2-10 with the number of cycles of a least 10 000 as specified, the complete switching system need not be tested		N/A
24.1.4	Automatic controls complying with IEC 60730-1 with the relevant part 2. The number of cycles of operation being at least:		--
	- thermostats:..... 10 000		N/A
	- temperature limiters:..... 1 000		N/A
	- self-resetting thermal cut-outs:..... 300		N/A
	- voltage maintained non-self-resetting thermal cut-outs: 1 000		N/A
	- other non-self-resetting thermal cut-outs:..... 30		N/A
	- timers: 3 000		N/A
	- energy regulators:.....10 000		N/A
	- thermostats which control motor-compressor (IEC/EN 60335-2-40):.....100 000		N/A
	- motor-compressor starting relays (IEC/EN 60335-2-40):.....100 000	100 000	P

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	- automatic thermal motor-protectors for hermetic and semi-hermetic type motor-compressors (not less than number of operations during locked rotor test) (IEC/EN 60335-2-40):.....min 2000	Approved	P
	- manual reset thermal motor-protectors for hermetic and semi-hermetic type motor-compressors (IEC/EN 60335-2-40):50		N/A
	- other automatic thermal motor-protectors (IEC/EN 60335-2-40):.....2000	Approved	P
	- other manual reset thermal motor-protectors (IEC/EN 60335-2-40):.....30		N/A
	The number of cycles for controls operating during clause 11 need not be declared, if the appliance meets the requirements of this standard when they are short-circuited		N/A
	Thermal motor protectors are tested in combination with their motor under the conditions specified in annex D		N/A
	For water valves containing live parts and that are incorporated in external hoses for connection of an appliance to the water mains, the degree of protection declared for subclause 6.5.2 of IEC 60730-2-8 is IPX7		N/A
24.1.5	Appliance couplers complying with IEC 60320-1		N/A
	However, for appliances classified higher than IPX0, the appliance couplers complying with IEC 60320-2-3		N/A
	Interconnection couplers complying with IEC 60320-2-2		N/A
24.1.6	Small lamp holders similar to E10 lampholders complying with IEC 60238, the requirements for E10 lampholders being applicable		N/A
24.1.7	For remote operation of the appliance via a telecommunication network, the relevant standard for the telecommunication interface circuitry in the appliance is IEC 62151		N/A
24.1.8	The relevant standard for thermal links is IEC 60691		P
	Thermal links not complying with IEC 60691 are considered to be an intentionally weak part for the purposes of clause 19		P
24.1.9	Contactors and relays, other than motor starting relays, tested as part of the appliance		P

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	They are also tested in accordance with clause 17 of IEC 60730-1, the number of cycles of operations in 24.1.4 selected according to the contactor or relay function in the appliance	Relay: 100000	P
24.2	Appliances not fitted with:		--
	- switches or automatic controls in flexible cords		P
	- devices causing the protective device in the fixed wiring to operate in the event of a fault in the appliance		P
	- thermal cut-outs that can be reset by soldering, unless		N/A
	the solder has a melting point of at least 230 °C		N/A
24.3	Switches intended for all-pole disconnection of stationary appliances are directly connected to the supply terminals and have a contact separation in all poles, providing full disconnection under overvoltage category III conditions	Stated in manual	N/A
24.4	Plugs and socket-outlets for extra-low voltage circuits and heating elements, not interchangeable with plugs and socket-outlets listed in IEC/TR 60083 or IEC 60906-1 or with connectors and appliance inlets complying with the standard sheets of IEC 60320-1		N/A
24.5	Capacitors in auxiliary windings of motors marked with their rated voltage and capacitance, and used accordingly		P
	Voltage across capacitors in series with a motor winding does not exceed 1,1 times rated voltage, when the appliance is supplied at 1,1 times rated voltage under minimum load	(See appended table)	P
24.6	Working voltage of motors connected to the supply mains and having basic insulation that is inadequate for the rated voltage of the appliance, not exceeding 42 V		N/A
	In addition, the motors comply with the requirements of annex I		N/A
24.7	Detachable hose-sets for connection of appliances to the water mains comply with IEC 61770		N/A
	They are supplied with the appliance		N/A
	Appliances intended to be permanently connected to the water mains not connected by a detachable hose-set		N/A

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
24.8	Motor running capacitors in appliances for which 30.2.3 is applicable and that are permanently connected in series with a motor winding, not causing a hazard in event of a failure		P
	One or more of the following conditions are to be met:		
	- the capacitors are of class P2 according to IEC 60252-1		P
	- the capacitors are housed within a metallic or ceramic enclosure		N/A
	- the distance of separation of the outer surface to adjacent non-metallic parts exceeds 50 mm		N/A
	- adjacent non-metallic parts within 50 mm withstand the needle-flame test of annex E		N/A
	- adjacent non-metallic parts within 50 mm classified as at least V-1 according to IEC 60695-11-10		N/A
24.101	Replaceable parts of thermal control devices identified by marking (IEC 60335-2-40)		N/A
25	SUPPLY CONNECTION AND EXTERNAL FLEXIBLE CORDS		--
25.1	Appliance not intended for permanent connection to fixed wiring, means for connection to the supply:		--
	- supply cord fitted with a plug,		N/A
	- an appliance inlet having at least the same degree of protection against moisture as required for the appliance, or		N/A
	- pins for insertion into socket-outlets		N/A
	Supply cord fitted with plug provided, if (IEC 60335-2-40):		--
	- appliance only for indoor use (IEC 60335-2-40),		N/A
	- marked with rating of 25 A or less and (IEC 60335-2-40)		N/A
	- complies with code requirements of country where it will be used (IEC 60335-2-40).		N/A
	Appliance inlet not allowed (IEC 60335-2-40)		P
25.2	Appliance not provided with more than one means of connection to the supply mains		N/A
	Stationary appliance for multiple supply may be provided with more than one means of connection, provided electric strength test of 1250 V for 1 min between each means of connection causes no breakdown		N/A
25.3	Appliance intended to be permanently connected to fixed wiring provided with one of the following means for connection to the supply mains:		--

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	- a set of terminals allowing the connection of a flexible cord		N/A
	- a fitted supply cord		N/A
	- a set of supply leads accommodated in a suitable compartment		N/A
	- a set of terminals for the connection of cables of fixed wiring, cross-sectional areas specified in 26.6, and the appliance allows the connection of the supply conductors after the appliance has been fixed to its support		P
	- a set of terminals and cable entries, conduit entries, knock-outs or glands, allowing connection of appropriate types of cable or conduit, and the appliance allows the connection of the supply conductors after the appliance has been fixed to its support		N/A
	For a fixed appliance constructed so that parts can be removed to facilitate easy installation, this requirement is met if it is possible to connect the fixed wiring without difficulty after a part of the appliance has been fixed to its support		N/A
25.4	Cable and conduit entries, rated current of appliance not exceeding 16 A, dimension according to table 10 (mm)		N/A
	Introduction of conduit or cable does not reduce clearances or creepage distances below values specified in clause 29		N/A
25.5	Method for assembling the supply cord to the appliance:		--
	- type X attachment		N/A
	- type Y attachment		P
	- type Z attachment, if allowed in relevant part 2		N/A
	Type X attachment, other than those with a specially prepared cord, not used for flat twin tinsel cords		N/A
	For multi-phase appliances supplied with a supply cord and that are intended to be permanently connected to fixed wiring, the supply cord is assembled to the appliance by type Y attachment		N/A
25.6	Plugs fitted with only one flexible cord		N/A
25.7	Supply cords, other than for class III appliances, being one of the following types:		--
	- rubber sheathed (at least 60245 IEC 53)		N/A
	- polychloroprene sheathed (at least 60245 IEC 57)		N/A

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	- cross-linked polyvinyl chloride sheathed (at least 60245 IEC 88)		N/A
	- polyvinyl chloride sheathed. Not used if they are likely to touch metal parts having a temperature rise exceeding 75 K during the test of clause 11		--
	- light polyvinyl chloride sheathed cord (60227 IEC 52), for appliances not exceeding 3 kg		N/A
	- ordinary polyvinyl chloride sheathed cord (60227 IEC 53), for other appliances		N/A
	- heat resistant polyvinyl chloride sheathed. Not used for type X attachment other than specially prepared cords		--
	- heat-resistant light polyvinyl chloride sheathed cord (60227 IEC 56), for appliances not exceeding 3 kg		N/A
	- heat-resistant polyvinyl chloride sheathed cord (60227 IEC 57), for other appliances		N/A
	Supply cords for class III appliances adequately insulated		N/A
	Test with 500 V for 2 min for supply cords of class III appliances that contain live parts		N/A
	Supply cords for outdoor use not lighter than polychloroprene sheathed flexible cord (60245 IEC 57) (IEC 60335-2-40)	Mentioned in manual : interconnection cord and power supply cord: H07RN-F	P
25.8	Nominal cross-sectional area of supply cords not less than table 11; rated current (A); cross-sectional area (mm ²).....:	Rated current: see labels. cross-sectional area: 2,5 mm ²	P
25.9	Supply cords not in contact with sharp points or edges		P
25.10	Supply cord of class I appliances have a green/yellow core for earthing		P
25.11	Conductors of supply cords not consolidated by soldering where they are subject to contact pressure, unless		P
	the contact pressure is provided by spring terminals		N/A
25.12	Insulation of the supply cord not damaged when moulding the cord to part of the enclosure		N/A
25.13	Inlet openings so constructed as to prevent damage to the supply cord		P
	If the enclosure at the inlet opening is not of insulating material, a non-detachable lining or bushing complying with 29.3 for supplementary insulation provided		N/A

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	If unsheathed supply cord, a similar additional bushing or lining is required, unless the appliance is		N/A
	class 0, or		N/A
	a class III appliance not containing live parts		N/A
25.14	Supply cords moved while in operation adequately protected against excessive flexing		N/A
	Flexing test, as described:		--
	- applied force (N).....:		N/A
	- number of flexings.....:		N/A
	The test does not result in:		--
	- short-circuit between the conductors, such that the current exceeds a value of twice the rated current		N/A
	- breakage of more than 10 % of the strands of any conductor		N/A
	- separation of the conductor from its terminal		N/A
	- loosening of any cord guard		N/A
	- damage to the cord or the cord guard		N/A
	- broken strands piercing the insulation and becoming accessible		N/A
25.15	For appliances with supply cord and appliances to be permanently connected to fixed wiring by a flexible cord, conductors of the supply cord relieved from strain, twisting and abrasion by use of cord anchorage		P
	The cord cannot be pushed into the appliance to such an extent that the cord or internal parts of the appliance can be damaged		P
	Pull and torque test of supply cord, values shown in table 12: mass (kg); pull (N); torque (not on automatic cord reel) (Nm)	100N; 0,35Nm	P
	Cord not damaged and max. 2 mm displacement of the cord		P
25.16	Cord anchorages for type X attachments constructed and located so that:		--
	- replacement of the cord is easily possible		N/A
	- it is clear how the relief from strain and the prevention of twisting are obtained		N/A
	- they are suitable for different types of supply cord		N/A
	- cord cannot touch the clamping screws of cord anchorage if these screws are accessible, unless		N/A

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	they are separated from accessible metal parts by supplementary insulation		N/A
	- the cord is not clamped by a metal screw which bears directly on the cord		N/A
	- at least one part of the cord anchorage securely fixed to the appliance, unless		N/A
	it is part of a specially prepared cord		N/A
	- screws which have to be operated when replacing the cord do not fix any other component, unless		N/A
	the appliance becomes inoperative or incomplete or the parts cannot be removed without a tool		N/A
	- if labyrinths can be bypassed the test of 25.15 is nevertheless withstood		N/A
	- for class 0, 0I and I appliances they are of insulating material or are provided with an insulating lining, unless		N/A
	failure of the insulation of the cord does not make accessible metal parts live		N/A
	- for class II appliances they are of insulating material, or		N/A
	if of metal, they are insulated from accessible metal parts by supplementary insulation		N/A
	After the test of 25.15, under the conditions specified, the conductors have not moved by more than 1 mm in the terminals		N/A
25.17	Adequate cord anchorages for type Y and Z attachment, test with the cord supplied with the appliance		P
25.18	Cord anchorages only accessible with the aid of a tool, or		P
	Constructed so that the cord can only be fitted with the aid of a tool		P
25.19	Type X attachment, glands not used as cord anchorage in portable appliances		N/A
	Tying the cord into a knot or tying the cord with string not used		N/A
25.20	The insulated conductors of the supply cord for type Y and Z attachment additionally insulated from accessible metal parts		P
25.21	Space for supply cord for type X attachment or for connection of fixed wiring constructed:		--

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	- to permit checking of conductors with respect to correct positioning and connection before fitting any cover		P
	- so there is no risk of damage to the conductors or their insulation when fitting the cover		P
	- for portable appliances, so that the uninsulated end of a conductor, if it becomes free from the terminal, prevented from contact with accessible metal parts		P
	2 N test to the conductor for portable appliances; no contact with accessible metal parts		N/A
25.22	Appliance inlets:		--
	- live parts not accessible during insertion or removal		N/A
	Requirement not applicable to appliance inlets complying with IEC 60320-1		N/A
	- connector can be inserted without difficulty		N/A
	- the appliance is not supported by the connector		N/A
	- not for cold conditions if temp. rise of external metal parts exceeds 75 K during clause 11, unless		N/A
	the supply cord is unlikely to touch such metal parts		N/A
25.23	Interconnection cords comply with the requirements for the supply cord, except that:	Mentioned in manual: H07RN-F	P
	- the cross-sectional area of the conductors is determined on the basis of the maximum current during clause 11		P
	- the thickness of the insulation may be reduced		N/A
	If necessary, electric strength test of 16.3		N/A
25.24	Interconnection cords not detachable without the aid of a tool if compliance with this standard is impaired when they are disconnected		P
25.25	Dimensions of pins that are inserted into socket-outlets compatible with the dimensions of the relevant socket-outlet.		N/A
	Dimensions of pins and engagement face in accordance with the dimensions of the relevant plug in IEC/TR 60083		N/A
26	TERMINALS FOR EXTERNAL CONDUCTORS		--
26.1	Appliances provided with terminals or equally effective devices for connection of external conductors		P

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	Terminals only accessible after removal of a non-detachable cover, except		P
	for class III appliances that do not contain live parts		N/A
	Earthing terminals may be accessible if a tool is required to make the connections and means are provided to clamp the wire independently from its connection		P
26.2	Appliances with type X attachment and appliances for the connection of cables to fixed wiring provided with terminals in which connections are made by means of screws, nuts or similar devices, unless		P
	the connections are soldered		N/A
	Screws and nuts not used to fix any other component, except		P
	internal conductors, if so arranged that they are unlikely to be displaced when fitting the supply conductors		P
	If soldered connections used, the conductor so positioned or fixed that reliance is not placed on soldering alone, unless		N/A
	barriers provided so that neither clearances nor creepage distances between live parts and other metal parts reduced below the values for supplementary insulation if the conductor becomes free at the soldered joint		N/A
26.3	Terminals for type X attachment and for connection of cables of fixed wiring so constructed that the conductor is clamped between metal surfaces with sufficient contact pressure but without damaging the conductor		P
	Terminals fixed so that when the clamping means is tightened or loosened:		--
	- the terminal does not become loose		P
	- internal wiring is not subjected to stress		P
	- neither clearances nor creepage distances are reduced below the values in clause 29		P
	Compliance checked by inspection and by the test of subclause 9.6 of IEC 60999-1, the torque applied being equal to two-thirds of the torque specified (Nm)	Nominal diameter of thread: 3,9mm; Screw category:II; Torque: 0,8Nm	P
	No deep or sharp indentations of the conductors		P

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
26.4	Terminals for type X attachment, except those having a specially prepared cord and those for the connection of cables of fixed wiring, no special preparation of conductors such as by soldering, use of cable lugs, eyelets or similar, and		P
	so constructed or placed that conductors prevented from slipping out when clamping screws or nuts are tightened		P
26.5	Terminals for type X attachment so located or shielded that if a wire of a stranded conductor escapes, no risk of accidental connection to other parts that result in a hazard		N/A
	Stranded conductor test, 8 mm insulation removed		N/A
	No contact between live parts and accessible metal parts and,		N/A
	for class II constructions, between live parts and metal parts separated from accessible metal parts by supplementary insulation only		N/A
26.6	Terminals for type X attachment and for connection of cables of fixed wiring suitable for connection of conductors with cross-sectional area according to table 13; rated current (A); nominal cross-sectional area (mm ²).....:	Rated current: see labels. cross-sectional area: 2,5 mm ²	P
	If a specially prepared cord is used, terminals need only be suitable for that cord		N/A
26.7	Terminals for type X attachment, except in class III appliances not containing live parts, accessible after removal of a cover or part of the enclosure		N/A
26.8	Terminals for the connection of fixed wiring, including the earthing terminal, located close to each other		P
26.9	Terminals of the pillar type constructed and located as specified		N/A
26.10	Terminals with screw clamping and screwless terminals not used for flat twin tinsel cords, unless		P
	conductors ends fitted with means suitable for screw terminals		P
	Pull test of 5 N to the connection		P
26.11	For type Y and Z attachment, soldered, welded, crimped or similar connections may be used		P
	For class II appliances, the conductor so positioned or fixed that reliance is not placed on soldering, welding or crimping alone		N/A

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	If soldering, welding or crimping alone used, barriers provided so that clearances and creepage distances between live parts and other metal parts are not reduced below the values for supplementary insulation if the conductor becomes free		N/A
27	PROVISION FOR EARTHING		--
27.1	Accessible metal parts of class 0I and I appliances permanently and reliably connected to an earthing terminal or earthing contact of the appliance inlet		P
	Earthing terminals and earthing contacts not connected to the neutral terminal		P
	Class 0, II and III appliances have no provision for earthing		N/A
	Safety extra-low voltage circuits not earthed, unless		N/A
	protective extra-low voltage circuits		N/A
27.2	Clamping means of earthing terminals adequately secured against accidental loosening		P
	Terminals for the connection of external equipotential bonding conductors allow connection of conductors of 2,5 to 6 mm ² , and		N/A
	do not provide earthing continuity between different parts of the appliance, and		N/A
	conductors cannot be loosened without the aid of a tool		N/A
27.3	For a detachable part having an earth connection and being plugged into another part of the appliance, the earth connection is made before and separated after current-carrying connections when removing the part		N/A
	For appliances with supply cords, current-carrying conductors become taut before earthing conductor, if the cord slips out of the cord anchorage		P
27.4	No risk of corrosion resulting from contact between parts of the earthing terminal and the copper of the earthing conductor or other metal		P
	Parts providing earthing continuity, other than parts of a metal frame or enclosure, have adequate resistance to corrosion		P
	If of steel, these parts provided with an electroplated coating with a thickness at least 5 μm		P
	Adequate protection against rusting of parts of coated or uncoated steel, only intended to provide or transmit contact pressure		P

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	In the body of the earthing terminal is a part of a frame or enclosure of aluminium or aluminium alloys, precautions taken to avoid risk of corrosion		P
27.5	Low resistance of connection between earthing terminal and earthed metal parts		P
	This requirement does not apply to connections providing earthing continuity in the protective extra-low voltage circuit, provided the clearances of basic insulation are based on the rated voltage of the appliance		N/A
	Resistance not exceeding 0,1Ω at the specified low-resistance test (Ω).....:	0,031 Ω	P
27.6	The printed conductors of printed circuit boards not used to provide earthing continuity in hand-held appliances.		N/A
	They may be used to provide earthing continuity in other appliances if at least two tracks are used with independent soldering points and the appliance complies with 27.5 for each circuit		N/A
28	SCREWS AND CONNECTIONS		--
28.1	Fixings, electrical connections and connections providing earthing continuity withstand mechanical stresses		P
	Screws not of soft metal liable to creep, such as zinc or aluminium		P
	Diameter of screws of insulating material min. 3 mm		N/A
	Screws of insulating material not used for any electrical connections or connections providing earthing continuity		N/A
	Screws used for electrical connections or connections providing earthing continuity screwed into metal		P
	Screws not of insulating material if their replacement by a metal screw can impair supplementary or reinforced insulation		P
	For type X attachment, screws to be removed for replacement of supply cord or for user maintenance, not of insulating material if their replacement by a metal screw impairs basic insulation		N/A
	For screws and nuts; torque-test as specified in table 14.....:	(see appended table)	P

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
28.2	Electrical connections and connections providing earthing continuity constructed so that contact pressure is not transmitted through non-ceramic insulating material liable to shrink or distort, unless		P
	there is resiliency in the metallic parts to compensate for shrinkage or distortion of the insulating material		N/A
	This requirement does not apply to electrical connections in circuits of appliances for which:		--
	- 30.2.2 is applicable and that carry a current not exceeding 0,5 A		N/A
	- 30.2.3 is applicable and that carry a current not exceeding 0,2 A		N/A
28.3	Space-threaded (sheet metal) screws only used for electrical connections if they clamp the parts together		N/A
	Thread-cutting (self-tapping) screws and thread rolling screws only used for electrical connections if they generate a full form standard machine screw thread		P
	Thread-cutting (self-tapping) screws not used if they are likely to be operated by the user or installer		N/A
	Thread-cutting, thread rolling and space threaded screws may be used in connections providing earthing continuity provided it is not necessary to disturb the connection:		--
	- in normal use,		P
	- during user maintenance,		P
	- when replacing a supply cord having a type X attachment, or		N/A
	- during installation		P
	At least two screws being used for each connection providing earthing continuity, unless		P
	the screw forms a thread having a length of at least half the diameter of the screw		P
28.4	Screws and nuts that make mechanical connection secured against loosening if they also make electrical connections or connections providing earthing continuity		P
	This requirement does not apply to screws in the earthing circuit if at least two screws are used, or		P
	if an alternative earthing circuit is provided		N/A

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	Rivets for electrical connections or connections providing earthing continuity secured against loosening if the connections are subjected to torsion		N/A
29	CLEARANCES, CREEPAGE DISTANCES AND SOLID INSULATION		--
	Clearances, creepage distances and solid insulation withstand electrical stress		P
	For coatings used on printed circuits boards to protect the microenvironment (Type 1) or to provide basic insulation (Type 2), annex J applies.....:		N/A
	The microenvironment is pollution degree 1 under type 1 protection		N/A
	For type 2 protection, the spacing between the conductors before the protection is applied is not less than the values specified in Table 1 of IEC 60664-3		N/A
	These values apply to functional, basic, supplementary and reinforced insulation.....:		N/A
	For motor-compressor not complying with IEC 60335-2-34, additions and modifications as specified (IEC 60335-2-40)		N/A
29.1	Clearances not less than the values specified in table 16, taking into account the rated impulse voltage for the overvoltage categories of table 15, unless	(see appended table)	P
	for basic insulation and functional insulation they comply with the impulse voltage test of clause 14		N/A
	However, if the distances are affected by wear, distortion, movement of the parts or during assembly, the clearances for rated impulse voltages of 1500 V and above are increased by 0,5 mm and the impulse voltage test is not applicable		N/A
	Impulse voltage test is not applicable:		--
	- when the microenvironment is pollution degree 3, or		P
	- for basic insulation of class 0 and class 01 appliances		N/A
	Appliances are in overvoltage category II		P
	A force of 2 N is applied to bare conductors, other than heating elements		P
	A force of 30 N is applied to accessible surfaces		P
29.1.1	Clearances of basic insulation withstand the overvoltages, taking into account the rated impulse voltage		P

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	The values of table 16 or the impulse voltage test of clause 14 are applicable.....:	(see appended table)	P
	Clearance at the terminals of tubular sheathed heating elements may be reduced to 1,0 mm if the microenvironment is pollution degree 1		N/A
	Lacquered conductors of windings considered to be bare conductors		P
29.1.2	Clearances of supplementary insulation not less than those specified for basic insulation in table 16	(see appended table)	P
29.1.3	Clearances of reinforced insulation not less than those specified for basic insulation in table 16, using the next higher step for rated impulse voltage	(see appended table)	P
	For double insulation, with no intermediate conductive part between basic and supplementary insulation, clearances are measured between live parts and the accessible surface, and the insulation system is treated as reinforced insulation		N/A
29.1.4	Clearances for functional insulation are the largest values determined from:		--
	- table 16 based on the rated impulse voltage.....:	(see appended table)	P
	- table F.7a in IEC 60664-1, frequency not exceeding 30 kHz		P
	- clause 4 of IEC 60664-4, frequency exceeding 30 kHz		N/A
	If values of table 16 are largest, the impulse voltage test of clause 14 may be applied instead, unless		N/A
	the microenvironment is pollution degree 3, or		P
	the distances can be affected by wear, distortion, movement of the parts or during assembly		N/A
	However, clearances are not specified if the appliance complies with clause 19 with the functional insulation short-circuited		N/A
	Lacquered conductors of windings considered to be bare conductors		P
	However, clearances at crossover points are not measured		P
	Clearance between surfaces of PTC heating elements may be reduced to 1mm		N/A
29.1.5	Appliances having higher working voltages than rated voltage, clearances for basic insulation are the largest values determined from:		--
	- table 16 based on the rated impulse voltage.....:		P

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	- table F.7a in IEC 60664-1, frequency not exceeding 30 kHz		P
	- clause 4 of IEC 60664-4, frequency exceeding 30 kHz		N/A
	If clearances for basic insulation are selected from Table F.7a of IEC 60664-1 or clause 4 of IEC 60664-4, the clearances of supplementary insulation are not less than those specified for basic insulation		N/A
	If clearances for basic insulation are selected from Table F.7a of IEC 60664-1, the clearances of reinforced insulation dimensioned as specified in Table F.7a are to withstand 160% of the withstand voltage required for basic insulation		N/A
	If clearances for basic insulation are selected from clause 4 of IEC 60664-4, the clearances of reinforced insulation are twice the value required for basic insulation		N/A
	If the secondary winding of a step-down transformer is earthed, or if there is an earthed screen between the primary and secondary windings, clearances of basic insulation on the secondary side not less than those specified in table 16, but using the next lower step for rated impulse voltage		N/A
	Circuits supplied with a voltage lower than rated voltage, clearances of functional insulation are based on the working voltage used as the rated voltage in table 15		P
29.2	Creepage distances not less than those appropriate for the working voltage, taking into account the material group and the pollution degree	(see appended table)	P
	Pollution degree 2 applies, unless		N/A
	- precautions taken to protect the insulation; pollution degree 1		N/A
	- insulation subjected to conductive pollution; pollution degree 3		P
	A force of 2 N is applied to bare conductors, other than heating elements		P
	A force of 30 N is applied to accessible surfaces		P
	In a double insulation system, the working voltage for both the basic and supplementary insulation is taken as the working voltage across the complete double insulation system		P
	Insulation located in airflow, pollution degree 3 unless (IEC 60335-2-40)		P

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	insulation enclosed or located so that unlikely to be exposed to pollution due to normal use (IEC 60335-2-40)		P
29.2.1	Creepage distances of basic insulation not less than specified in table 17.....:	(see appended table)	P
	However, if the working voltage is periodic and has a frequency exceeding 30 kHz, the creepage distances are also determined from table 2 of IEC 60664-4, these values being used if exceeding the values in table 17.....:		N/A
	Except for pollution degree 1, corresponding creepage distance not less than the minimum specified for the clearance in table 16, if the clearance has been checked according to the test of clause 14		N/A
29.2.2	Creepage distances of supplementary insulation at least those specified for basic insulation in table 17, or	(see appended table)	P
	Table 2 of IEC 60664-4, as applicable		N/A
29.2.3	Creepage distances of reinforced insulation at least double those specified for basic insulation in table 17, or	(see appended table)	P
	Table 2 of IEC 60664-4, as applicable		N/A
29.2.4	Creepage distances of functional insulation not less than specified in table 18.....:	(see appended table)	P
	However, if the working voltage is periodic and has a frequency exceeding 30 kHz, the creepage distances are also determined from table 2 of IEC 60664-4, these values being used if exceeding the values in table 18.....:		N/A
	Creepage distances may be reduced if the appliance complies with clause 19 with the functional insulation short-circuited		N/A
29.3	Supplementary and reinforced insulation have adequate thickness, or a sufficient number of layers, to withstand the electrical stresses		P
	Compliance checked:		--
	- by measurement, in accordance with 29.3.1, or		P
	- by an electric strength test in accordance with 29.3.2, or		P
	- by an assessment of the thermal quality of the material combined with an electric strength test, in accordance with 29.3.3, and		N/A

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	for accessible parts of reinforced insulation consisting of a single layer, by measurement in accordance with 29.3.4, or		N/A
	- as specified in subclause 6.3 of IEC 60664-4 for insulation that is subjected to any periodic voltage having a frequency exceeding 30 kHz		N/A
29.3.1	Supplementary insulation have a thickness of at least 1 mm		P
	Reinforced insulation have a thickness of at least 2 mm		P
29.3.2	Each layer of material withstand the electric strength test of 16.3 for supplementary insulation		P
	Supplementary insulation consist of at least 2 layers		P
	Reinforced insulation consist of at least 3 layers		N/A
29.3.3	The insulation is subjected to the dry heat test Bb of IEC 60068-2-2, followed by		N/A
	the electric strength test of 16.3		N/A
	If the temperature rise during the tests of clause 19 does not exceed the value specified in table 3, the test of IEC 60068-2-2 is not carried out		N/A
29.3.4	Thickness of accessible parts of reinforced insulation consisting of a single layer not less than specified in table 19.....:		N/A
30	RESISTANCE TO HEAT AND FIRE		--
30.1	External parts of non-metallic material,		P
	parts supporting live parts, and		P
	parts of thermoplastic material providing supplementary or reinforced insulation		P
	sufficiently resistant to heat		P
	Ball-pressure test according to IEC 60695-10-2		P
	External parts tested at 40 °C plus the maximum temperature rise determined during the test of clause 11, or at 75 °C, whichever is the higher; temperature (°C).....:	(see appended table)	P
	Parts supporting live parts tested at 40 °C plus the maximum temperature rise determined during the test of clause 11, or at 125 °C, whichever is the higher; temperature (°C).....:	(see appended table)	P

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	Parts of thermoplastic material providing supplementary or reinforced insulation tested at 25 °C plus the maximum temperature rise determined during clause 19, if higher; temperature (°C)	(see appended table)	N/A
30.2	Parts of non-metallic material resistant to ignition and spread of fire		P
	This requirement does not apply to:		--
	parts having a mass not exceeding 0,5 g, provided the cumulative effect is unlikely to propagate flames that originate inside the appliance by propagating flames from one part to another, or		N/A
	decorative trims, knobs and other parts unlikely to be ignited or to propagate flames that originate inside the appliance		N/A
	Compliance checked by the test of 30.2.1, and in addition:		P
	- for attended appliances, 30.2.2 applies		N/A
	- for unattended appliances, 30.2.3 applies		P
	For appliances for remote operation, 30.2.3 applies		N/A
	For base material of printed circuit boards, 30.2.4 applies		P
30.2.1	Parts of non-metallic material subjected to the glow-wire test of IEC 60695-2-11 at 550 °C		P
	However, test not carried out if the material is classified as having a glow-wire flammability index according to IEC 60695-2-12 of at least 550 °C, or		N/A
	the material is classified at least HB40 according to IEC 60695-11-10		N/A
	Parts for which the glow-wire test cannot be carried out need to meet the requirements in ISO 9772 for material classified HBF		N/A
30.2.3	Appliances operated while unattended, tested as specified in 30.2.3.1 and 30.2.3.2		P
	The tests are not applicable to conditions as specified		N/A
30.2.3.1	Parts of non-metallic material supporting connections carrying a current exceeding 0,2 A during normal operation, and		P
	parts of non-metallic material, other than small parts, within a distance of 3 mm,		P
	subjected to the glow-wire test of IEC 60695-2-11 with a test severity of 850 °C		P

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	Glow-wire applied to an interposed shielding material, if relevant		P
	The glow-wire test is not carried out on parts of material classified as having a glow-wire flammability index according to IEC 60695-2-12 of at least 850 °C		N/A
30.2.3.2	Parts of non-metallic material supporting connections, and		P
	parts of non-metallic material within a distance of 3 mm,		P
	subjected to glow-wire test of IEC 60695-2-11		P
	The test severity is:		--
	- 750 °C, for connections carrying a current exceeding 0,2 A during normal operation		P
	- 650 °C, for other connections		P
	Glow-wire applied to an interposed shielding material, if relevant		P
	However, the glow-wire test of 750 °C or 650 °C as appropriate, is not carried out on parts of material fulfilling both or either of the following classifications:		--
	- a glow-wire ignition temperature according to IEC 60695-2-13 of at least:		N/A
	- 775 °C, for connections carrying a current exceeding 0,2 A during normal operation		N/A
	- 675 °C, for other connections		N/A
	- a glow-wire flammability index according to IEC 60695-2-12 of at least:		N/A
	- 750 °C, for connections carrying a current exceeding 0,2 A during normal operation		N/A
	- 650 °C, for other connections		N/A
	The glow-wire test is also not carried out on small parts. These parts are to:		--
	- comprise material having a glow-wire ignition temperature of at least 775 °C or 675 °C as appropriate, or		N/A
	- comprise material having a glow-wire flammability index of at least 750 °C or 650 °C as appropriate, or		N/A
	- comply with the needle-flame test of annex E, or		N/A
	- comprise material classified as V-0 or V-1 according to IEC 60695-11-10		N/A

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	The consequential needle-flame test of annex E applied to non-metallic parts that encroach within the vertical cylinder placed above the centre of the connection zone and on top of the non-metallic parts supporting current-carrying connections, and parts of non-metallic material within a distance of 3 mm of such connections if these parts are those:		--
	- parts that withstood the glow-wire test of IEC 60695-2-11 of 750 °C or 650 °C as appropriate, but produce a flame that persist longer than 2 s, or		P
	- parts that comprised material having a glow-wire flammability index of at least 750 °C or 650 °C as appropriate, or		N/A
	- small parts, that comprised material having a glow-wire flammability index of at least 750 °C or 650 °C as appropriate, or		N/A
	- small parts for which the needle-flame test of annex E was applied, or		N/A
	- small parts for which a material classification of V-0 or V-1 was applied		N/A
	However, the consequential needle-flame test is not carried out on non-metallic parts, including small parts, within the cylinder that are:		--
	- parts having a glow-wire ignition temperature of at least 775 °C or 675 °C as appropriate, or		N/A
	- parts comprising material classified as V-0 or V-1 according to IEC 60695-11-10, or		N/A
	- parts shielded by a flame barrier that meets the needle-flame test of annex E or that comprises material classified as V-0 or V-1 according to IEC 60695-11-10		N/A
30.2.4	Base material of printed circuit boards subjected to the needle-flame test of annex E		P
	Test not applicable to conditions as specified		N/A
31	RESISTANCE TO RUSTING		--
	Relevant ferrous parts adequately protected against rusting		P
	Tests specified in part 2 when necessary		P
	Salt mist test of IEC 60068-2-52, severity 2 (IEC 60335-2-40)		P
	Before test, coatings are scratched by means of a harden steel pin as specified (IEC 60335-2-40)		P
	Five scratches made at least 5 mm apart and at least 5 mm from the edges (IEC 60335-2-40)		P

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	Appliance not deteriorated to such an extent that compliance with clause 8 and 27 is impaired (IEC 60335-2-40)		P
	Coating not be broken and not loosened from the metal surface (IEC 60335-2-40)		P
A	ANNEX A (INFORMATIVE) ROUTINE TESTS		--
	Description of routine tests to be carried out by the manufacturer		P
B	ANNEX B (NORMATIVE) APPLIANCES POWERED BY RECHARGEABLE BATTERIES		--
	The following modifications to this standard are applicable for appliances powered by batteries that are recharged in the appliance		N/A
	This annex does not apply to battery chargers		N/A
3.1.9	Appliance operated under the following conditions:		--
	- the appliance, supplied by its fully charged battery, operated as specified in relevant part 2		N/A
	- the battery is charged, the battery being initially discharged to such an extent that the appliance cannot operate		N/A
	- if possible, the appliance is supplied from the supply mains through its battery charger, the battery being initially discharged to such an extent that the appliance cannot operate. The appliance is operated as specified in relevant part 2		N/A
	- if the appliance incorporates inductive coupling between two parts that are detachable from each other, the appliance is supplied from the supply mains with the detachable part removed		N/A
3.6.2	Part to be removed in order to discard the battery is not considered to be detachable		N/A
5.B.101	Appliances supplied from the supply mains tested as specified for motor-operated appliances		N/A
7.1	Battery compartment for batteries intended to be replaced by the user, marked with battery voltage and polarity of the terminals		N/A
	The positive terminal indicated by symbol IEC 60417-5005 and the negative terminal by symbol IEC 60417-5006		N/A
7.6	Symbols 60417-5005 and IEC 60417-5006		N/A
7.12	The instructions give information regarding charging		N/A

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	The instructions for appliances incorporating batteries intended to be replaced by the user includes required information		N/A
	Details about how to remove batteries containing materials hazardous to the environment given		N/A
7.15	Markings placed on the part of the appliance connected to the supply mains		N/A
8.2	Appliances having batteries that according to the instruction may be replaced by the user need only have basic insulation between live parts and the inner surface of the battery compartment		N/A
	If the appliance can be operated without batteries, double or reinforced insulation required		N/A
11.7	The battery is charged for the period stated in the instructions or 24 h		N/A
19.1	Appliances subjected to tests of 19.B.101, 19.B.102 and 19.B.103		N/A
19.10	Not applicable		N/A
19.B.101	Appliances supplied at rated voltage for 168 h, the battery being continually charged		N/A
19.B.102	For appliances having batteries that can be removed without the aid of a tool, short-circuit of the terminals of the battery, the battery being fully charged,		N/A
19.B.103	Appliances having batteries replaceable by the user supplied at rated voltage under normal operation with the battery removed or in any position allowed by the construction		N/A
21.B.101	Appliances having pins for insertion into socket-outlets have adequate mechanical strength		N/A
	Part of the appliance incorporating the pins subjected to the free fall test, procedure 2, of IEC 60068-2-31, the number of falls being:		--
	- 100, if the mass of the part does not exceed 250 g (g)		N/A
	- 50, if the mass of the part exceeds 250 g		N/A
	After the test, the requirements of 8.1, 15.1.1, 16.3 and clause 29 are met		N/A
22.3	Appliances having pins for insertion into socket-outlets tested as fully assembled as possible		N/A
25.13	An additional lining or bushing not required for interconnection cords in class III appliances or class III constructions operating at safety extra-low voltage not containing live parts		N/A

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
30.2	For parts of the appliance connected to the supply mains during the charging period, 30.2.3 applies		N/A
	For other parts, 30.2.2 applies		N/A
C	ANNEX C (NORMATIVE) AGEING TEST ON MOTORS		--
	Tests, as described, carried out when doubt with regard to the temperature classification of the insulation of a motor winding		N/A
	Test conditions as specified		N/A
E	ANNEX E (NORMATIVE) NEEDLE-FLAME TEST		--
	Needle-flame test carried out in accordance with IEC 60695-11-5, with the following modifications:		--
7	Severities		--
	The duration of application of the test flame is 30 s ± 1 s		P
9	Test procedure		--
9.1	The specimen so arranged that the flame can be applied to a vertical or horizontal edge as shown in the examples of figure 1		P
9.2	The first paragraph does not apply		P
	If possible, the flame is applied at least 10 mm from a corner		P
9.3	The test is carried out on one specimen		P
	If the specimen does not withstand the test, the test may be repeated on two additional specimens, both withstanding the test		N/A
11	Evaluation of test results		--
	The duration of burning not exceeding 30 s		N/A
	However, for printed circuit boards, the duration of burning not exceeding 15 s		P
F	ANNEX F (NORMATIVE) CAPACITORS		--
	Capacitors likely to be permanently subjected to the supply voltage, and used for radio interference suppression or voltage dividing, comply with the following clauses of IEC 60384-14, with the following modifications:		--
1.5	Terms and definitions		--
1.5.3	Class X capacitors tested according to subclass X2		N/A
1.5.4	This subclause is applicable		N/A
1.6	Marking		--

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	Items a) and b) are applicable		N/A
3.4	Approval testing		--
3.4.3.2	Table 3 is applicable as described		N/A
4.1	Visual examination and check of dimensions		--
	This subclause is applicable		N/A
4.2	Electrical tests		--
4.2.1	This subclause is applicable		N/A
4.2.5	This subclause is applicable		N/A
4.2.5.2	Only table 11 is applicable		N/A
	Values for test A apply		N/A
	However, for capacitors in heating appliances the values for test B or C apply		N/A
4.12	Damp heat, steady state		--
	This subclause is applicable		N/A
	Only insulation resistance and voltage proof are checked		N/A
4.13	Impulse voltage		--
	This subclause is applicable		N/A
4.14	Endurance		--
	Subclauses 4.14.1, 4.14.3, 4.14.4 and 4.14.7 are applicable		N/A
4.14.7	Only insulation resistance and voltage proof are checked		N/A
	No visible damage		N/A
4.17	Passive flammability test		--
	This subclause is applicable		N/A
4.18	Active flammability test		--
	This subclause is applicable		N/A
G	ANNEX G (NORMATIVE) SAFETY ISOLATING TRANSFORMERS		--
	The following modifications to this standard are applicable for safety isolating transformers:		N/A
7	Marking and instructions		--
7.1	Transformers for specific use marked with:		--
	- name, trademark or identification mark of the manufacturer or responsible vendor.....:		N/A

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	- model or type reference		N/A
17	Overload protection of transformers and associated circuits		--
	Fail-safe transformers comply with subclause 15.5 of IEC 61558-1		N/A
22	Construction		--
	Subclauses 19.1 and 19.1.2 of IEC 61558-2-6 are applicable		N/A
29	Clearances, creepage distances and solid insulation		--
29.1, 29.2, 29.3	The distances specified in items 2a, 2c and 3 in table 13 of IEC 61558-1 apply		N/A
	For insulated winding wires complying with subclause 19.12.3 of IEC 61558-1 there are no requirements for clearances or creepage distances		N/A
	For windings providing reinforced insulation, the distance specified in item 2c of table 13 of IEC 61558-1 is not assessed		N/A
	For safety isolating transformers subjected to periodic voltages with a frequency exceeding 30 kHz, the clearances, creepage distances and solid insulation values specified in IEC 60664-4 are applicable, if greater than the values specified in items 2a, 2c and 3 in table 13 of IEC 61558-1		N/A
H	ANNEX H (NORMATIVE) SWITCHES		--
	Switches comply with the following clauses of IEC 61058-1, as modified below:		--
	The tests of IEC 61058-1 carried out under the conditions occurring in the appliance		N/A
	Before being tested, switches are operated 20 times without load		N/A
8	Marking and documentation		--
	Switches are not required to be marked		N/A
	However, a switch that can be tested separately from the appliance marked with the manufacturer's name or trade mark and the type reference		N/A
13	Mechanism		--
	The tests may be carried out on a separate sample		N/A
15	Insulation resistance and dielectric strength		--
15.1	Not applicable		N/A
15.2	Not applicable		N/A
15.3	Applicable for full disconnection and micro-disconnection		N/A

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
17	Endurance		--
	Compliance is checked on three separate appliances or switches		N/A
	For 17.2.4.4, the number of cycles declared according to 7.1.4 is 10 000, unless		N/A
	otherwise specified in 24.1.3 of the relevant part 2 of IEC 60335.....:		N/A
	Switches for operation under no load and which can be operated only by a tool, and		N/A
	switches operated by hand that are interlocked so that they cannot be operated under load,		N/A
	are not subjected to the tests		N/A
	However, switches without this interlock are subjected to the test of 17.2.4.4 for 100 cycles of operation		N/A
	Subclauses 17.2.2 and 17.2.5.2 not applicable		N/A
	The ambient temperature during the test is that occurring in the appliance during the test of clause 11 in IEC 60335-1		N/A
	The temperature rise of the terminals not more than 30 K above the temperature rise measured in clause 11 of IEC 60335-1 (K)		N/A
20	Clearances, creepage distances, solid insulation and coatings of rigid printed board assemblies		--
	This clause is applicable to clearances and creepage distances for functional insulation, across full disconnection and micro-disconnection, as stated in table 24		N/A
J	ANNEX J (NORMATIVE) COATED PRINTED CIRCUIT BOARDS		--
	Testing of protective coatings of printed circuit boards carried out in accordance with IEC 60664-3 with the following modifications:		N/A
5.7	Conditioning of the test specimens		--
	When production samples are used, three samples of the printed circuit board are tested		N/A
5.7.1	Cold		--
	The test is carried out at -25 °C		N/A
5.7.3	Rapid change of temperature		--
	Severity 1 is specified		N/A
5.9	Additional tests		--
	This subclause is not applicable		N/A

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
K	ANNEX K (NORMATIVE) OVERVOLTAGE CATEGORIES		--
	The information on overvoltage categories is extracted from IEC 60664-1		P
	Overvoltage category is a numeral defining a transient overvoltage condition		P
	Equipment of overvoltage category IV is for use at the origin of the installation		N/A
	Equipment of overvoltage category III is equipment in fixed installations and for cases where the reliability and the availability of the equipment is subject to special requirements		N/A
	Equipment of overvoltage category II is energy consuming equipment to be supplied from the fixed installation		P
	If such equipment is subjected to special requirements with regard to reliability and availability, overvoltage category III applies		N/A
	Equipment of overvoltage category I is equipment for connection to circuits in which measures are taken to limit transient overvoltages to an appropriate low level		N/A
L	ANNEX L (INFORMATIVE) GUIDANCE FOR THE MEASUREMENT OF CLEARANCES AND CREEPAGE DISTANCES		--
	Information for the determination of clearances and creepage distances		P
M	ANNEX M (NORMATIVE) POLLUTION DEGREE		--
	The information on pollution degrees is extracted from IEC 60664-1		P
	Pollution		--
	The microenvironment determines the effect of pollution on the insulation, taking into account the macroenvironment		P
	Means may be provided to reduce pollution at the insulation by effective enclosures or similar		P
	Minimum clearances specified where pollution may be present in the microenvironment		P
	Degrees of pollution in the microenvironment		--
	For evaluating creepage distances, the following degrees of pollution in the microenvironment are established:		--

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	- pollution degree 1: no pollution or only dry, non-conductive pollution occurs. The pollution has no influence		N/A
	- pollution degree 2: only non-conductive pollution occurs, except that occasionally a temporary conductivity caused by condensation is to be expected		N/A
	- pollution degree 3: conductive pollution occurs or dry non-conductive pollution occurs that becomes conductive due to condensation that is to be expected		P
	- pollution degree 4: the pollution generates persistent conductivity caused by conductive dust or by rain or snow		N/A
N	ANNEX N (NORMATIVE) PROOF TRACKING TEST		--
	The proof tracking test is carried out in accordance with IEC 60112 with the following modifications:		--
7	Test apparatus		--
7.3	Test solutions		--
	Test solution A is used		P
10	Determination of proof tracking index (PTI)		--
10.1	Procedure		--
	The proof voltage is 100 V, 175 V, 400 V or 600 V:	175 V	P
	The test is carried out on five specimens		P
	In case of doubt, additional test with proof voltage reduced by 25 V, the number of drops increased to 100		N/A
10.2	Report		--
	The report states if the PTI value was based on a test using 100 drops with a test voltage of (PTI-25) V		N/A
O	ANNEX O (INFORMATIVE) SELECTION AND SEQUENCE OF THE TESTS OF clause 30		--
	Description of tests for determination of resistance to heat and fire		P
P	ANNEX P (INFORMATIVE) GUIDANCE FOR THE APPLICATION OF THIS STANDARD TO APPLIANCES USED IN WARM DAMP EQUABLE CLIMATES		--

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	Modifications applicable for class 0 and 01 appliances having a rated voltage exceeding 150 V, intended to be used in countries having a warm damp equable climate and that are marked WDaE		--
	Modifications may also be applied to class 1 appliances having a rated voltage exceeding 150 V, intended to be used in countries having a warm damp equable climate and that are marked WDaE, if liable to be connected to a supply mains that excludes the protective earthing conductor		--
5.7	The ambient temperature for the tests of clauses 11 and 13 is 40 +3/0 °C		N/A
7.1	The appliance marked with the letters WDaE		N/A
7.12	The instructions state that the appliance is to be supplied through a residual current device (RCD) having a rated residual operating current not exceeding 30 mA		N/A
	The instructions state that the appliance is considered to be suitable for use in countries having a warm damp equable climate, but may also be used in other countries		N/A
11.8	The values of Table 3 are reduced by 15 K		N/A
13.2	The leakage current for class I appliances not exceeding 0,5 mA		N/A
15.3	The value of t is 37 °C		N/A
16.2	The leakage current for class I appliances not exceeding 0,5 mA (mA):		N/A
19.13	The leakage current test of 16.2 is applied in addition to the electric strength test of 16.3		N/A
Q	ANNEX Q (INFORMATIVE) SEQUENCE OF TESTS FOR THE EVALUATION OF ELECTRONIC CIRCUITS		--
	Description of tests for appliances incorporating electronic circuits		--
R	ANNEX R (NORMATIVE) SOFTWARE EVALUATION		--
	Programmable electronic circuits requiring software incorporating measures to control the fault/error conditions specified in table R.1 or R.2 validated in accordance with the requirements of this annex		N/A
R.1	Programmable electronic circuits using software		--
	Programmable electronic circuits requiring software incorporating measures to control the fault/error conditions specified in table R.1 or R.2 constructed so that the software does not impair compliance with the requirements of this standard		N/A
R.2	Requirements for the architecture		--

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	Programmable electronic circuits requiring software incorporating measures to control the fault/error conditions specified in table R.1 or R.2 use measures to control and avoid software-related faults/errors in safety-related data and safety-related segments of the software		N/A
R.2.1.1	Programmable electronic circuits requiring software incorporating measures to control the fault/error conditions specified in table R.2 have one of the following structures:		--
	- single channel with periodic self-test and monitoring		N/A
	- dual channel (homogenous) with comparison		N/A
	- dual channel (diverse) with comparison		N/A
	Programmable electronic circuits requiring software incorporating measures to control the fault/error conditions specified in table R.1 have one of the following structures:		--
	- single channel with functional test		N/A
	- single channel with periodic self-test		N/A
	- dual channel without comparison		N/A
R.2.2	Measures to control faults/errors		--
R.2.2.1	When redundant memory with comparison is provided on two areas of the same component, the data in one area is stored in a different format from that in the other area		N/A
R.2.2.2	Programmable electronic circuits with functions requiring software incorporating measures to control the fault/error conditions specified in table R.2 and that use dual channel structures with comparison, have additional fault/error detection means for any fault/errors not detected by the comparison		N/A
R.2.2.3	For programmable electronic circuits with functions requiring software incorporating measures to control the fault/error conditions specified in table R.1 or R.2, means are provided for the recognition and control of errors in transmissions to external safety-related data paths		N/A
R.2.2.4	For programmable electronic circuits with functions requiring software incorporating measures to control the fault/error conditions specified in table R.1 or R.2, the programmable electronic circuits incorporate measures to address the fault/errors in safety-related segments and data indicated in table R.1 and R.2 as appropriate		N/A

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
R.2.2.5	For programmable electronic circuits with functions requiring software incorporating measures to control the fault/error conditions specified in table R.1 or R.2, detection of a fault/error occur before compliance with clause 19 is impaired		N/A
R.2.2.6	The software is referenced to relevant parts of the operating sequence and the associated hardware functions		N/A
R.2.2.7	Labels used for memory locations are unique		N/A
R.2.2.8	The software is protected from user alteration of safety-related segments and data		N/A
R.2.2.9	Software and safety-related hardware under its control is initialized and terminates before compliance with clause 19 is impaired		N/A
R.3	Measures to avoid errors		--
R.3.1	General		--
	For programmable electronic circuits with functions requiring software incorporating measures to control the fault/error conditions specified in table R.1 or R.2, the following measures to avoid systematic fault in the software are applied		--
	Software that incorporates measures used to control the fault/error conditions specified in table R.2 is inherently acceptable for software required to control the fault/error conditions specified in table R.1		N/A
R.3.2	Specification		--
R.3.2.1	Software safety requirements:	Software Id:	N/A
	The specification of the software safety requirements includes the descriptions listed		N/A
R.3.2.2	Software architecture		--
R.3.2.2.1	The specification of the software architecture includes the aspects listed - techniques and measures to control software faults/errors (refer to R.2.2); - interactions between hardware and software; - partitioning into modules and their allocation to the specified safety functions; - hierarchy and call structure of the modules (control flow); - interrupt handling; - data flow and restrictions on data access; - architecture and storage of data; - time-based dependencies of sequences and data	Document ref. No:	N/A

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
R.3.2.2.2	The architecture specification is validated against the specification of the software safety requirements by static analysis		N/A
R.3.2.3	Module design and coding		--
R.3.2.3.1	Based on the architecture design, software is suitably refined into modules		N/A
	Software module design and coding is implemented in a way that is traceable to the software architecture and requirements		N/A
R.3.2.3.2	Software code is structured		N/A
R.3.2.3.3	Coded software is validated against the module specification by static analysis		N/A
	The module specification is validated against the architecture specification by static analysis		N/A
R.3.3.3	Software validation		--
	The software is validated with reference to the requirements of the software safety requirements specification		N/A
	Compliance is checked by simulation of:		--
	- input signals present during normal operation		N/A
	- anticipated occurrences		N/A
	- undesired conditions requiring system action		N/A

TABLE R.1 ^e – GENERAL FAULT/ERROR CONDITIONS						
Component ^a	Fault/error	Acceptable measures ^{b, c}	Definitions	Document reference for applied measure	Document reference for applied test	Ver-dict
1 CPU 1.1 Registers	Stuck at	Functional test, or periodic self-test using either: - static memory test, or - word protection with single bit redundancy	H.2.16.5 H.2.16.6 H.2.19.6 H.2.19.8.2			N/A
1.2 VOID						--

IEC 60335-2-40						
Clause	Requirement + Test			Result - Remark		Verdict
1.3 Programme counter	Stuck at	Functional test, or Periodic self-test, or Independent time-slot monitoring, or Logical monitoring of the programme sequence	H.2.16.5 H.2.16.6 H.2.18.10.4 H.2.18.10.2			N/A
2 Interrupt handling and execution	No interrupt or too frequent interrupt	Functional test, or time-slot monitoring	H.2.16.5 H.2.18.10.4			N/A
3 Clock	Wrong frequency (for quartz synchroniz ed clock: harmonics/ sub-harmo nics only)	Frequency monitoring, or time slot monitoring	H.2.18.10.1 H.2.18.10.4			N/A
4. Memory 4.1 Invariable memory	All single bit faults	Periodic modified checksum, or multiple checksum, or word protection with single bit redundancy	H.2.19.3.1 H.2.19.3.2 H.2.19.8.2			N/A
4.2 Variable memory	DC fault	Periodic static memory test, or word protection with single bit redundancy	H.2.19.6 H.2.19.8.2			N/A
4.3 Addressing (relevant to variable and invariable memory)	Stuck at	Word protection with single bit redundancy including the address	H.2.19.8.2			N/A
5 Internal data path	Stuck at	Word protection with single bit redundancy	H.2.19.8.2			N/A
5.1 VOID						--
5.2 Addressing	Wrong address	Word protection with single bit redundancy including the address	H.2.19.8.2			N/A

IEC 60335-2-40						
Clause	Requirement + Test		Result - Remark			Verdict
6 External communication	Hamming distance 3	Word protection with multi-bit redundancy, or CRC – single work, or Transfer redundancy, or Protocol test	H.2.19.8.1 H.2.19.4.1 H.2.18.2.2 H.2.18.14			N/A
6.1 VOID						--
6.2 VOID						--
6.3 Timing	Wrong point in time Wrong sequence	Time-slot monitoring, or scheduled transmission Time-slot and logical monitoring, or comparison of redundant communication channels by either: - reciprocal comparison - independent hardware comparator Logical monitoring, or time-slot monitoring, or Scheduled transmission	H.2.18.10.4 H.2.18.18 H.2.18.10.3 H.2.18.15 H.2.18.3 H.2.18.10.2 H.2.18.10.4 H.2.18.18			N/A
7 Input/output periphery	Fault conditions specified in 19.11.2	Plausibility check	H.2.18.13			N/A
7.1 VOID						--
7.2 Analog I/O						
7.2.1 A/D and D/A-converter	Fault conditions specified in 19.11.2	Plausibility check	H.2.18.13			N/A
7.2.2 Analog multiplexer	Wrong addressing	Plausibility check	H.2.18.13			N/A
8 VOID						--
9 Custom chips ^d e.g. ASIC, GAL, gate array	Any output outside the static and dynamic functional specification	Periodic self-test	H.2.16.6			N/A

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict

NOTE A Stuck-at fault model denotes a fault model representing an open circuit or a non-varying signal level. A DC fault model denotes a stuck-at fault model incorporating short circuit between signal lines.

- a) For fault/error assessment, some components are divided into their sub-functions.
- b) For each sub-function in the table, the Table R.2 measure will cover the software fault/error.
- c) Where more than one measure is given for a sub-function, these are alternatives.
- d) To be divided as necessary by the manufacturer into sub-functions.
- e) Table R.1 is applied according to the requirements of R.1 to R.2.2.9 inclusive.

AA	ANNEX AA (INFORMATIVE) (IEC 60335-2-40) EXAMPLES FOR OPERATING TEMPERATURES OF THE APPLIANCE		--
-----------	---	--	----

BB	ANNEX BB (NORMATIVE) (IEC 60335-2-40) SELECTED INFORMATION ABOUT REFRIGERANTS		--
-----------	--	--	----

CC	ANNEX CC (INFORMATIVE) (IEC/EN 60335-2-40/A1) TRANSPORTATION, MARKING AND STORAGE FOR UNITS THAT EMPLOY FLAMMABLE REFRIGERANTS		--
CC.1	Transport of equipment containing flammable refrigerants (IEC 60335-2-40/A1)		N/A
CC.2	Marking of equipment using signs (IEC 60335-2-40/A1)		N/A
CC.3	Disposal of equipment using flammable refrigerants (IEC 60335-2-40/A1)		N/A
CC.4	Storage of equipment/appliances (IEC 60335-2-40/A1)		N/A
CC.5	Storage of packed (unsold) equipment (IEC 60335-2-40/A1)		N/A

DD	ANNEX DD (NORMATIVE) (IEC/EN 60335-2-40/A1) SERVICE OPERATIONS		--
DD.1	Generals (IEC 60335-2-40/A1)		N/A
DD.2	Symbols (IEC 60335-2-40/A1)		N/A
DD.3	Information in manual (IEC 60335-2-40/A1 corr.1)		N/A
DD.4	Information on servicing (IEC 60335-2-40/A1)		N/A
DD.5	Repairs to sealed components (IEC 60335-2-40/A1)		N/A
DD.6	Repair to intrinsically safe components (IEC 60335-2-40/A1)		N/A
DD.7	Cabling (IEC 60335-2-40/A1)		N/A
DD.8	Detection of flammable refrigerants (IEC 60335-2-40/A1)		N/A

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
DD.9	Leak detection methods (IEC 60335-2-40/A1)		N/A
DD.10	Removal and evacuation (IEC 60335-2-40/A1)		N/A
DD.11	Charging procedures (IEC 60335-2-40/A1)		N/A
DD.12	Decommissioning (IEC 60335-2-40/A1)		N/A
DD.13	Labelling (IEC 60335-2-40/A1)		N/A
DD.14	Recovery (IEC 60335-2-40/A1)		N/A

EE	ANNEX EE (NORMATIVE) (IEC/EN 60335-2-40/A1) PRESSURE TESTS		--
EE.1	General (IEC 60335-2-40/A1)		P
EE.2	Pressure test value determined under testing carried out in clause 11 (IEC 60335-2-40/A1)		P
EE.3	Pressure test value determined under testing carried out in clause 19 (IEC 60335-2-40/A1)		P
EE.4	Pressure test value determined under testing carried out under standstill conditions (IEC 60335-2-40/A1)		P
EE.5	Fatigue test option for Clauses EE.1 and EE.4.1 (IEC 60335-2-40/A1)		N/A

FF	ANNEX FF (NORMATIVE) (IEC/EN 60335-2-40/A1) LEAK SIMULATION TESTS		--
FF.1	General (IEC 60335-2-40/A1)		N/A
FF.2	Test methods (IEC 60335-2-40/A1 corr.1)		N/A

GG	ANNEX GG (NORMATIVE) (IEC/EN 60335-2-40/A1) CHARGE LIMITS, VENTILATION REQUIREMENTS AND REQUIREMENTS FOR SECONDARY CIRCUITS		--
GG.1	Requirements for charge limits in ventilated areas (IEC 60335-2-40/A1 Corr.1)		N/A
GG.2	Requirements for charge limits in unventilated areas (IEC 60335-2-40/A1 Corr.1)		N/A
GG.3	Requirements for charge limits in areas with mechanical ventilation (IEC 60335-2-40/A1)		N/A
GG.4	Requirements for mechanical ventilation within the appliance enclosure (IEC 60335-2-40/A1)		N/A
GG.5	Requirements for mechanical ventilation for rooms complying with ISO 5149 (IEC 60335-2-40/A1)		N/A

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
GG.6	Requirements for refrigeration systems employing secondary heat exchangers (IEC 60335-2-40/A1 Corr.1)		N/A
GG.7	The appliance shall then be tested with a maximum water flow under the conditions described in g) (IEC 60335-2-40/A1)		N/A

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict

10.1	TABLE: Power input deviation					P
Input deviation of/at: 230 V~	P rated (W)	P measured (W)	dP	Required dP	Remark	
Cooling mode	2350	1760	-25,1%	+15%	--	
Heating mode	2350	1650	-29,8%	+15%	--	

10.2	TABLE: Current deviation					P
Current deviation of/at: 230 V~	I rated (A)	I measured (A)	dI	Required dI	Remark	
Cooling mode	12,0	8,0	-33,3%	+15%	--	
Heating mode	12,0	7,5	-37,5%	+15%	--	

11.8	TABLE: Heating test, thermocouples			P
	Test voltage (V)	1,06 x 240 V = 254,4 V		—
	Ambient, t ₁ (°C)	See supplementary information		—
	Ambient, t ₂ (°C)			
Thermocouple locations		T (°C)		Max. T (°C)
		Cooling mode	Heating mode	
Power cord		38,9	36,7	75
Fan motor		56,8	57,2	150
Fan motor capacitor		35,8	35,5	T70
Air outlet		17,4	18,3	90
Test corner		42,8	44,2	90
thermostat		36,3	37,1	T85
Louver motor switch		33,6	32,2	T55
Control panel		35,1	34,6	For cl.30.1
Discharge pipe		87,6	89,7	Ref.
Compressor enclosure		89,3	89,8	Ref.
Internal wire		68,1	68,3	T105
Compressor capacitor		52,4	52,5	T70
4-way valve		50,3	29,8	110 (Class B)
Supplementary information:				
Cooling mode: Indoor unit: DB 32 °C, WB: 23 °C; Outdoor unit: DB 43 °C, WB: 26 °C.				
Heating mode: Indoor unit: DB 30 °C, WB: 19 °C; Outdoor unit: DB 24 °C, WB: 18 °C.				
The alternative components with the appliance and the 0,94 times rated voltage were also conducted; the most unfavourable test results were recorded.				

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict

11.8	TABLE: Heating test, resistance method					P
Temperature of winding	R ₁ (Ω) 25°C	R ₂ (Ω)	T (°C)	Max. T (°C)	Insulation class	
Cooling mode						
winding of fan motor	46,1(25°C)	55,1	78,0	145	F	
Heating mode						
winding of fan motor	46,5(25°C)	56,3	77,0	145	F	
Supplementary information: R1: 25°C						

13.2	TABLE: Leakage current		P
	Heating appliances: 1,15 x rated input.....:	-	—
	Motor-operated and combined appliances: 1,06 x rated voltage.....:	1,06 x 240V = 243,8V	—
Leakage current between		I (mA)	Max, allowed I (mA)
N and earthed metal parts		0,220	2,0/kW
N and plastic enclosure		0,013	0,35 peak
Supplementary information: the tests were carried out at all modes; the most unfavourable test results were recorded.			

13,3	TABLE: Electric strength		P
Test voltage applied between:		Voltage (V)	Breakdown (Yes/No)
L/N – earthing metal enclosure		1000	No
L/N – plastic cover		3000	No

14	TABLE: Transient overvoltages					N/A
Clearance between:	Cl (mm)	Required Cl (mm)	Rated impulse voltage (V)	Impulse test voltage (V)	Flashover (Yes/No)	
--	--	--	--	--	--	

16,2	TABLE: Leakage current		P
	Single phase appliances: 1,06 x rated voltage.....:	254,4 V	—
	Three phase appliances 1,06 x rated voltage divided by $\sqrt{3}$:	-	—
Leakage current between		I (mA)	Max, allowed I (mA)
L/N – earthing metal enclosure		0,246	2,0/kW
L/N – plastic cover		0,012	0,25

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict

16.3	TABLE: Electric strength		P
Test voltage applied between:		Voltage (V)	Breakdown (Yes/No)
L/N – earthing metal enclosure		1250	No
L/N – plastic cover		3000	No

17	TABLE: Overload protection, temperature rise		P
Temperature rise of part/at:		T (°C)	Max, T (°C)
Winding of transformer TT2-C35-1F(TT220-EI41-11/35-F1-02): Zhanliang		146,5	225
Winding of transformer TT2-C35-1F(TT220-EI41-11/35-F1-02): Dazhong		147,3	225
Winding of transformer TT2-C35-1F(TT220-EI41-11/35-F1-02): WanXin		152,1	225
Winding of transformer TT2-C35-1F(TT220-EI41-11/35-F1-02): Coin		142,6	225

17	TABLE: Overload protection, resistance method				N/A
	Test voltage (V)				—
	Ambient, t1 (°C).....				—
	Ambient, t2 (°C).....				—
Temperature of winding	R1 (Ω)	R2 (Ω)	Δ T (K)	T (°C)	Max. T (°C)
-	-	-	-	-	-
Supplementary information: --					

19	Abnormal operation conditions		P
Operational characteristics	YES/NO	Operational conditions	
Are there electronic circuits to control the appliance operation?	Yes	-	
Are there “off” or “stand-by” position?	Yes	-	
The unintended operation of the appliance results in dangerous malfunction?	No	-	

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict

Sub-clause	Operating conditions description	Test results description	PEC description	EMP 19.11.4	Software type required	19.11.3 PEC	Final result
19.2	P	P	N.A	N.A	N.A	N.A	P
19.3	N.A	N.A	N.A	N.A	N.A	N.A	N.A
19.4	N.A	N.A	N.A	N.A	N.A	N.A	N.A
19.5	P	P	N.A	N.A	N.A	N.A	P
19.6	N.A	N.A	N.A	N.A	N.A	N.A	N.A
19.7	P	P	N.A	N.A	N.A	N.A	P
19.8	N.A	N.A	N.A	N.A	N.A	N.A	N.A
19.9	N.A	N.A	N.A	N.A	N.A	N.A	N.A
19.10	P	P	N.A	N.A	N.A	N.A	P
19.11.2	P	P	N.A	N.A	N.A	N.A	P
19.11.4.8	N.A	N.A	N.A	N.A	N.A	N.A	N.A
19.101	N.A	N.A	N.A	N.A	N.A	N.A	N.A
Supplementary information: --							

19.2	TABLE: lock motor test, temperature rise measurements			P
	t1 (°C)	:	23,0	—
	t2 (°C)	:	23,0	—
Procedure	Supplied at 230V			—
Duration	15 days			—
temperature of part/at:		Measured temperature(°C)	required temperature(°C)	Insulation class
Winding of fan motor YKSS-200-4-63: Broad-Ocean		127,3	225	F
Enclosure of fan motor YKSS-200-4-63: Broad-Ocean		101,4	150	--
Winding of fan motor YKSS-200-4-63: Welling		121,2	225	F
Enclosure of fan motor YKSS-200-4-63 : Welling		100,5	150	--
Leakage current between the windings and the enclosure at 480V		I (mA)	required I (mA)	
YKSS-200-4-63: Broad-Ocean		1,08	2,0	
YKSS-200-4-63: Welling		1,03	2,0	
Remark: the electric strength test as specified in 16,3 performed after 3 days of the test.				

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict

19.3	Abnormal operation conditions – Locked rotor test motor-compressor				N/A
	Motor-compressor.....:	--			
	Start device.....:	--			
	Protector.....:	--			
	Start capacitor.....:	--			
	Run capacitor.....:	--			
	Cooling; (static); (fan-m ³ /h); (oil);.....:	--			
	Thermal motor-protection system.....:	--			
		Self-resetting			Manually reset
	Rated voltage	Vn max (V)			Vn min (V) Vn max (V)
	240V~	After 72 h	After 288 h	After 360 h	After 363 h After 50 cycles
	High-voltage test (see 16.3)	-	-	-	-
	Leakage current (mA) (see 16.2)	-	-	-	-
	Electric strength (see 13.3)	-	-	-	-
	Room temperature (°C) (20 ± 5°C)	-	-	-	-
	Number of cycles (≥ 2000 or 50)	-	-	-	-
	Housing temperature (°C) (≤ 150°C)	-	-	-	-
supplementary information:					

19.5-19.9	Abnormal operation conditions			P
Subclause	Effect			Verdict
19.5	Refer to table 19,5			P
19.6	-			N/A
19.7	Refer to table 19,7			P
19.8	-			N/A
19.9	-			N/A
Supplementary information: --				

19.5	TABLE: restrict heat exchangers test			P
	t1 (°C).....:	23,0		—
	t2 (°C).....:	23,0		—
Procedure	Supplied at 230V			—
Duration	Until steady conditions are obtained or the protective device operates			—
Restrict heat exchanger	phenomenon		hazard	
Restrict indoor exchanger at cooling mode	Operated normally.		No	

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict

Restrict outdoor exchanger at cooling mode	Operated normally.		No
--	--------------------	--	----

19.7	TABLE: low and high temperature test		P
Low temperature	t (°C)	-5/--(DB/WB indoor), -12/--(DB/WB outdoor)	—
High temperature	t (°C)	42/--(DB/WB indoor), 53/--(DB/WB outdoor)	—
Procedure	Supplied at 230V		—
Duration	Until steady conditions are obtained or the protective device operates		—
		phenomenon	hazard
Dry-bulb temperature reduced a value 5 K below the minimum value	Operated normally.		No
Dry-bulb temperature increased a value 10 K above the maximum value	Operated normally.		No

19.10	Abnormal operation conditions		P
Failure description	Effect	Verdict	
The programme controller, if any, stopping in any position	Protection occurred, compressor stopped	P	
Open-circuiting or short-circuiting of components	Protection occurred, compressor stopped	P	
Supplementary information: --			

19.14	TABLE: Abnormal operation		P
	t ₁ (°C)	23,0	-
	t ₂ (°C)	23,0	-
Temperature T of part / at :	T (°C)	Required T (°C)	
Insulation of supply cord	61,1	175	
Walls, ceiling and floor of the test casing	59,1	175	

24.1	TABLE: Components					P
Object / part No.	Manufacturer/ trademark	Type / model	Technical data	Standard	Mark(s) of conformity	

IEC 60335-2-40					
Clause	Requirement + Test			Result - Remark	Verdict
1. Power supply cord	Changzhou Hongchang Electronics Co., Ltd.	H05VV-F or H05V2V2-F 227 IEC 53	3G 2,5 mm ²	IEC 60227-5 EN 50525-2-21	VDE 40015536
(Alternative)	Phino Electric Co., Ltd.	H05VV-F or H05V2V2-F 227 IEC 53	3G 2,5 mm ²	IEC 60227-5 EN 50525-2-21	VDE 72576
(Alternative)	Changzhou Wujin Xuexiang Telecommunication Component Factory	H05VV-F or H05V2V2-F 227 IEC 53	3G 2,5 mm ²	IEC 60227-5 EN 50525-2-21	VDE 40016696
(Alternative)	Shunde Huasheng Electrical Industrial Co., Ltd.	H05VV-F or H05V2V2-F 227 IEC 53	3G 2,5 mm ²	IEC 60227-5 EN 50525-2-21	VDE 40005362
(Alternative)	Ningbo Light-Heavy Electronics Technology Co.,Ltd	H05VV-F or H05V2V2-F 227 IEC 53	3G 2,5 mm ²	IEC 60227-5 EN 50525-2-21	VDE 40007592
(Alternative)	HANGZHOU HONGSHI	H05VV-F or H05V2V2-F 227 IEC 53	3G 2,5 mm ²	IEC 60227-5 EN 50525-2-21	VDE 40010839
(Alternative)	CHAU'S ELECTRICAL Co.,Ltd	H05VV-F or H05V2V2-F 227 IEC 53	3G 2,5 mm ²	IEC 60227-5 EN 50525-2-21	VDE 113934/ 40008371
(Alternative)	Guangzhou Pan Yu Cable Works CO., LTD	H05VV-F or H05V2V2-F 227 IEC 53	3G 2,5 mm ²	IEC 60227-5 EN 50525-2-21	VDE 40016252
(Alternative)	WEIHAI HONGLING ELECTRONIC CO., LTD	H05VV-F or H05V2V2-F 227 IEC 53	3G 2,5 mm ²	IEC 60227-5 EN 50525-2-21	VDE 40022785
(Alternative)	Sinofair (Hong Kong) LTD.	H05VV-F or H05V2V2-F 227 IEC 53	3G 2,5 mm ²	IEC 60227-5 EN 50525-2-21	VDE 125483
(Alternative)	AWIN WIRE&CABLE CO LTD	H05VV-F or H05V2V2-F 227 IEC 53	3G 2,5 mm ²	IEC 60227-5 EN 50525-2-21	VDE 40023114

IEC 60335-2-40					
Clause	Requirement + Test		Result - Remark		Verdict
(Alternative)	Kaihua Electric Appliance CO LTD	H05VV-F or H05V2V2-F 227 IEC 53	3G 2,5 mm ²	IEC 60227-5 EN 50525-2-21	VDE 40001903
(Alternative)	Volex Cables(China) CO LTD	H05VV-F or H05V2V2-F 227 IEC 53	3G 2,5 mm ²	IEC 60227-5 EN 50525-2-21	VDE 103704
(Alternative)	CHANGZHOU HONGCHANG ELECTRONICS CO.,LTD	H05VV-F or H05V2V2-F 227 IEC 53	3G 2,5 mm ²	K 60227-5 IEC 60227-5	KC HU01021-6002B
(Alternative)	GUANGDONG KAI HUA ELECTRIC APPLIANCE CO., LTD	H05VV-F or H05V2V2-F 227 IEC 53	3G 2,5 mm ²	K 60227-5 IEC 60227-5	KC SU01028-4001A
(Alternative)	GUANGDONG HUASHENG ELECTRICAL APPLIANCES CO.,LTD	H05VV-F or H05V2V2-F 227 IEC 53	3G 2,5 mm ²	K 60227-5 IEC 60227-5	KC HU01017-5002C
2. Fan motor	Zhongshan Broad-Ocean Motor Co., Ltd.	YKSS-200-4-63	220-240V, 200W, CLASS F	IEC 60335-1 IEC 60335-2-40	Tested with appliance
(Alternative)	Guangdong Weilling Motor Manufacturing Co., Ltd.	YKSS-200-4-63	220-240V, 200W, CLASS F	IEC 60335-1 IEC 60335-2-40	Tested with appliance
3. Compressor	Kulthorn Kirby Public Co., Ltd	PA206G2C-4KTL	220 V – 240 V; 50 Hz; R410a	IEC 60335-1 IEC 60335-2-34	TUV Rh
4. Compressor capacitor	Shanghai Haoye Capacitors Co., Ltd	MKPC	450V-50-P2(2000h); 50 μF; P2; T mark: 80°C	IEC 60252-1	VDE 40007405
(Alternative)	Anhui Tong Feng Electronics Co., Ltd.	CBB65	450V-50-P2(2000h); 50 μF; P2; T mark: 80°C	IEC 60252-1	VDE 121116
(Alternative)	Wuxi Hongguang Capacitor Co., Ltd.	CBB65	450V-50-P2(2000h); 50 μF; P2; T mark: 80°C	IEC 60252-1	TÜV Rh R 50165370
(Alternative)	Anhui Feida Industry Stock Co., Ltd.	CBB65A-1	450V-50-P2(2000h); 50 μF; P2; T mark: 80°C	IEC 60252-1	VDE 112776

IEC 60335-2-40					
Clause	Requirement + Test			Result - Remark	Verdict
(Alternative)	Panasonic Electronic Devices(Jiangmen) Co., Ltd.	SH-D	450V-50-P2(2000h); 50 μF; P2; T mark: 80°C	IEC 60252-1	TÜV Rh R 50145374
(Alternative)	Xinhui Matsushita Industrial (Panasonic)	SH	450V-50-P2(2000h); 50 μF; P2; T mark: 80°C	IEC 60252-1	TÜV Rh R 50145374
(Alternative)	Wuhu City Jinxin Electronics Co., Ltd.	CBB65	450V-50-P2(2000h); 50 μF; P2; T mark: 80°C	IEC 60252-1	VDE 128580
(Alternative)	Anhui Juan Kuang Electric Co., Ltd	CBB65	450V-50-P2(2000h); 50 μF; P2; T mark: 80°C	IEC/IEC 60252-1	TUV Rh R 50101980
(Alternative)	ANHUI XINYANG ELECTRONICS CO.,LTD.	CBB65	450V-50-P2(2000h); 50 μF; P2; T mark: 80°C	IEC/IEC 60252-1	TUVRh R 50209494
(Alternative)	Wuxi Hongguang Capacitor CO., Ltd	CBB65	450V-50-P2(2000h); 50 μF; P2; T mark: 80°C	IEC/IEC 60252-1	TUV Rh R 50165370
(Alternative)	Anhui Juan Kuang Electrical Co., Ltd	CBB65	450V-50-P2(2000h); 50 μF; P2; T mark: 80°C	IEC/IEC 60252-1	TUV Rh R 50101980
(Alternative)	Ningbo Shine Electrical Co., Ltd	CBB65A-1	450V-50-P2(2000h); 50 μF; P2; T mark: 80°C	IEC/IEC 60252-1	TUV Rh R 50014642
(Alternative)	Ningbo Shine Electrical Co., Ltd	CBB65A	450V-50-P2(2000h); 50 μF; P2; T mark: 80°C	IEC/IEC 60252-1	TUV Rh R 50014642
5. Fan motor capacitor	Panasonic Electronic Devices (Jiangmen) Co.,Ltd.	45PSN / 45PSR	10uF,AC450V,50.6 0Hz,T70,P2,	EN/IEC 60252-1	TUV RH R50141504
(Alternative)	Panasonic Electronic Devices (Jiangmen) Co.,Ltd.	45PSN / 45PSR	10uF,AC450V,50.6 0Hz,T70,P2,	EN/IEC 60252-1	TUV RH R50141504
(Alternative)	Shanghai Haoye Capacitors Co.,Ltd	MKPC series	10uF,AC450V,50.6 0Hz,T70,P2,	EN/IEC 60252-1	VDE400074 05

IEC 60335-2-40					
Clause	Requirement + Test			Result - Remark	Verdict
(Alternative)	Sheng Ye Electrical Co Ltd	C61-P2	10uF,AC450V,50.60Hz,T70,P2,	EN/IEC 60252-1	TUV SUD 13 12 73204 010
(Alternative)	Shanghai haoye electric co.,ltd.	MKP-1 series	10uF,AC450V,50.60Hz,T70,P2,	EN/IEC 60252-1	VDE 40023685
(Alternative)	Shanghai haoye electric co.,ltd.	MKP-2 series	10uF,AC450V,50.60Hz,T70,P2,	EN/IEC 60252-1	TUV 50272575
(Alternative)	Shunde Kesheng Electronic Co.,Ltd	CBB61S	10uF,AC450V,50.60Hz,T70,P2,	EN/IEC 60252-1	TUV Rh R50276081
(Alternative)	Guangdong Shuntai Capacitors & Electrical Equipment Co., Ltd(ST)	CBB61A	10uF,AC450V,50.60Hz,T70,P2,	EN/IEC 60252-1	TUV Rh R50268803
(Alternative)	guangdong fengming electronic tech.co.,ltd	CBB61-P2	10uF,AC450V,50.60Hz,T70,P2,	EN/IEC 60252-1	TUV Rh R50274996
(Alternative)	Xiamen faratronic Co.,LTd	CBB61-S3(CG6)	10uF,AC450V,50.60Hz,T70,P2,	EN/IEC 60252-1	TUV Rh R50266163
6. Fan motor protector	Wujin control electrical appliances plant	BW series	AC250V; 8A; Tf: 130°C	IEC 60730-1 IEC 60730-2-2	VDE 40013915
(Alternative)	Sensata Technologies Changzhou Co., Ltd	8CM	AC250V; 8A; Tf: 130°C	IEC 60730-1 IEC 60730-2-2	KEMA 2014531
(Alternative)	Changzhou new zone desheng	BR series	AC250V; 8A; Tf: 130°C	IEC 60730-1 IEC 60730-2-2	VDE 132813
(Alternative)	Changzhou Newzone Desheng Electric Appliance Co., Ltd.	BR-A	250VAC; 6A; Tf: 130°C	IEC 60730-1 IEC 60730-2-2	VDE 132813
(Alternative)	Chang Zhou City Tong Li	KW-C2-130	250VAC; 6A; Tf: 130°C	IEC 60730-1 IEC 60730-2-2	VDE 40004418

IEC 60335-2-40					
Clause	Requirement + Test			Result - Remark	Verdict
(Alternative)	Shengzhou Ganlin Wangshi Thermal Protector Factory	JW-130	250VAC; 5A; Tf: 130°C	IEC 60730-1 IEC 60730-2-2	VDE 40006013
(Alternative)	Sensata Technologies Holland. B.V.	BW	250VAC; 6A; Tf: 130°C	IEC 60730-1 IEC 60730-2-2	VDE 40013915
(Alternative)	Sensata Technologies Holland. B.V.	8CM	277VAC; 6A; Tf: 130°C	IEC 60730-1 IEC 60730-2-2	KEMA 2014531
(Alternative)	Sensata Technologies Holland. B.V.	17AM	277VAC; 8A; Tf: 130°C	IEC 60730-1 IEC 60730-2-2	KEMA 2014531
Thermostat	TONGBAO-HUALONG CONTROLS Co., Ltd	WP14D-LR	25A, 250V, Tf: 85°C, cycles: 10000	IEC 60730-1 IEC 60730-2-9	VDE
7. Swing motor	Taishan Xiangda motor Factory. (Kexinte)	SM021 (TB-49-20-8-27)	220/240V; 50/60Hz; 4W	IEC 60335-1	VDE 5484
(Alternative)	Changzhou Ouck Electric Co., Ltd.	SM021 (TB-49-20-8-27)	220/240V; 50/60Hz; 4W	IEC 60335-1	VDE 40019802
8. Transfor mer	SHUNDE ZHANLIANG IND, CO.,LTD.	TT2-C35-1F(TT220-EI41-11/35-F1-02)	EI57x30,input: 220-240VAC; Output: 12.5Vac; 1 1.0Vac,class B	EN/IEC 60335-2-40	Test with appliance
(Alternative)	Dongguan meisheng	TT2-C35-1F(TT220-EI41-11/35-F1-02)	EI57x30,input: 220-240VAC; Output: 12.5Vac; 1 1.0Vac,class B	EN/IEC 60335-2-40	Test with appliance
(Alternative)	Dongguan Dazhong Electronic co.,Ltd.	TT2-C35-1F(TT220-EI41-11/35-F1-02)	EI57x30,input: 220-240VAC; Output: 12.5Vac; 1 1.0Vac,class B	EN/IEC 60335-2-40	Test with appliance
(Alternative)	Foshan Shunde WANXIN Electronic co.,Ltd.	TT2-C35-1F(TT220-EI41-11/35-F1-02)	EI57x30,input: 220-240VAC; Output: 12.5Vac; 1 1.0Vac,class B	EN/IEC 60335-2-40	Test with appliance
9. Relay I	Tyco Electronics (Shenzhen) Co.,Ltd.	PCJ-112D3M	5A/250VAC; 1E5 cycles; T85 °C	EN/IEC 61810-1 EN/IEC 60255-23	VDE: 1146900-0009
(Alternative)	Dongguan Churod Electronics Co.,Ltd	A1-V-112DA	5A; 250VAC; T85°C; 100000cycles	EN/IEC 61810-1 EN/IEC 60255-23	TÜV RhR 50174892

IEC 60335-2-40					
Clause	Requirement + Test			Result - Remark	Verdict
Fan motor relay	Dongguan Churod Electronics Co., Ltd.	CHM-V-112DA3	5A;250VAC;T90 °C; operation cycles:100000	EN/IEC 61810-1 EN/IEC 60255-23	TÜV RhR 50196152
(Alternative)	Dongguan Sanyou Electrical Appliances Co., Ltd	SRB-S-112DM (SRB-SH-112DM1)	5A; 277VAC;T mark: 85°C;100000	EN/IEC 61810-1 EN/IEC 60255-23	TÜV Rh R50138320
(Alternative)	Dongguan Sanyou Electrical Appliances Co., Ltd.	SJ-S-112DM	5A; 250VAC; operation cycles: 100000cycle; T85°C	EN/IEC 61810-1 EN/IEC 60255-23	VDE400077 93
(Alternative)	Dongguan Sanyou Electrical Appliances Co., Ltd.	SRD-S-112D	240VAC/5A 100K cycles, T85;	EN/IEC 61810-1 EN/IEC 60255-23	TÜV Rh R50142424
(Alternative)	Tyco Electronics (Shenzhen) Co., Ltd.	OMI**;OMIH-**;OMIT-**	5A; 250VAC;T mark: 70°C;100000	EN/IEC 61810-1 EN/IEC 60255-23	TÜV Rh R40005414
(Alternative)	Omron Corporation.	G5NB-1A-E	5A; 250VAC; T85; 100000cycles	EN/IEC 61810-1 EN/IEC 60255-23	VDE 137575
(Alternative)	Song Chuan Precision Co., Ltd.	307-1AH-C	5A; 250VAC;T mark: 70°C; 100000	EN/IEC 61810-1 EN/IEC 60255-23	TÜV Rh R50128391
(Alternative)	Shanghai Songchuan Electronic Industrial Co.,Ltd	833H-1C-C	5A; 250VAC; T mark: 70°C; 100000	EN/IEC 61810-1 EN/IEC 60255-23	TUV RH R 50003996
(Alternative)	Song Chuan Precision Co Ltd	891WP-1A-C(BP)	5A; 250VAC; T mark: 85°C; 100000	EN/IEC 61810-1 EN/IEC 60255-23	TUV RH R 50003996
(Alternative)	Tyco Electronics Ec K.K.	PCJ-112D3M	12VDC; 5A; 250VAC; operate cycles: 1E5, T mark: 90°C	EN/IEC 61810-1 EN/IEC 60255-23	VDE400091 51
(Alternative)	Wangrong Electronics (Shenzhen) Co., Ltd	RJ-SS-112DM	5A; 250VAC; T80°C; 100000cycles	EN/IEC 61810-1 EN/IEC 60255-23	TÜV Rh5022270 1
(Alternative)	Wangrong Electronics (Shenzhen) Co., Ltd	RJ-SS-112DM1	5A; 250VAC; T85°C; 100000cycles	EN/IEC 61810-1 EN/IEC 60255-23	TÜV Rh5022270 1
(Alternative)	Wangrong Electronics(Shenzhen)Co., Ltd	RC-112DM1	5A; 250VAC; T80°C; 100000cycles	EN/IEC 61810-1 EN/IEC 60255-23	TÜV RhR 50220640
(Alternative)	Xiamen Hongfa Electroacous Tic Co Ltd	HF46F/12-HS1	5A; 250VAC;T mark: 70°C;100000	EN/IEC 61810-1 EN/IEC 60255-23	VDE 40025215
(Alternative)	Xiamen Hongfa Electroacoustic Co., Ltd.	HF46F/12HS1	5A; 250VAC; T70°C; 100000cycles	EN/IEC 61810-1 EN/IEC 60255-23	VDE400252 15

IEC 60335-2-40					
Clause	Requirement + Test		Result - Remark		Verdict
(Alternative)	Xiamen Hongfa Electroacoustic Co., Ltd.	HF102F.(-;P).. HF102F.(-;P)T.. HF160F..- H.(5;6) HF160F..- H.(5;6)T	5A; 250VAC; operation cycles: 100000cycles, T70°C	EN/IEC 61810-1 EN/IEC 60255-23	VDE400241 42
(Alternative)	Yueqing Meishuo Electric Co., Ltd	MPD-S-112-A-2 (MPD-S-112-A)	5A; 250VAC; T105°C; 100000	EN/IEC 61810-1 EN/IEC 60255-23	TÜV Rh R50184948
(Alternative)	Yueqing Meishuo Electric Co., Ltd	MPR-S-112-A	5A;250VAC; T85°C; operation cycles:100000	EN/IEC 61810-1 EN/IEC 60255-23	TÜV RhR 50217035
(Alternative)	Dongguan Sanyou Electrical Appliances co.,ltd.	JDQ-SS-112V	5A/250VAC;T mark: 70°C; 10E4	EN/IEC 61810-1 EN/IEC 60255-23	TUV:R5013 8320
(Alternative)	Panasonic Industrial Devices Sales (China) Co., Ltd. Shenzhen Branch	ALDP112W	5A 277V AC;T mark: 70°C; 10E4	EN/IEC 61810-1 EN/IEC 60255-23	VDE 40014384
10. Relay II	Dongguan Churod Electronics Co., Ltd.	CHF-V-112DA2	250VAC/25A, T85°C 10,000,000 cycles	EN/IEC 61810-1 EN/IEC 60255-23	TÜV RhR 50220099
(Alternative)	Dongguan Sanyou Electrical Appliances Co., Ltd	SFK-112DM or SFK-112DMG or SFK- 112DMP	20A/25A; 250VAC; T mark: 70°C; 10E4	EN/IEC 61810-1 EN/IEC 60255-23	VDE 40007481
(Alternative)	Dongguan Sanyou Electrical Appliances Co., Ltd.	SLI-S-112DMK or SLI-S- 112DM	30A,240VAC,100K, 85°C	EN/IEC 61810-1 EN/IEC 60255-23	TUV Rh R50143450
(Alternative)	Wangrong Electronics (shenzhen) Co., Ltd.	RF-SS- 112DMF-L	20A 250VAC,T85°C,200 ,000 cycles	EN/IEC 61810-1 EN/IEC 60255-23	TUV: R50194013
(Alternative)	Omron Electronic Component(Shenzhen)Ltd	G4A-1A-E	250VAC; 20A; T- mark: 85°C; Operation cycles: 100000	EN/IEC 61810-1 EN/IEC 60255-23	VDE 6623
(Alternative)	Xiamen Hongfa Electroacoustic Co Ltd	JZX-18FF Series	20A; 250VAC; T70 °C; 10E4	IEC/EN 61810-1	TUV Rh AN 09857507
(Alternative)	Yueqing Meishuo Electronics Co., Ltd.	MPY-S-112-A- P or MPY-S- 112-A	20A; 250VAC; T85°C; 200,000 cycles	EN/IEC 61810-1 EN/IEC 60255-23	TÜV RhR R50204088
(Alternative)	Yueqing Meishuo Electronics Co., Ltd.	MPQ4-S-112D- A	30A; 240VAC; T70°C; 10E4	EN/IEC 61810-1 EN/IEC 60255-23	TUV Rh R 50184977
11. Internal wire	YUEQING GUOXIN ELECTRIC WIRE FACTORY	UL1015	AWG12-22; 600VAC; 105°C	IEC 60335-1 IEC 60335-2-40	Tested with appliance UL E247528

IEC 60335-2-40					
Clause	Requirement + Test			Result - Remark	Verdict
(Alternative)	CHANGZHOU HONGCHANG ELECTRONICS CO.,LTD	UL1015	AWG12-22; 600VAC; 105°C	IEC 60335-1 IEC 60335-2-40	Tested with appliance UL E247528
(Alternative)	HUASHENG ELETRICAL INDUSTRIAL CO.,LTD	UL1015	AWG12-22; 600VAC; 105°C	IEC 60335-1 IEC 60335-2-40	Tested with appliance UL E247528
(Alternative)	GUANGDONG PROVINCE GUANGZHOU PANYU CABLE WORKS CO.,LTD PANYU CABLE FACTORY	UL1015	AWG12-22; 600VAC; 105°C	IEC 60335-1 IEC 60335-2-40	Tested with appliance UL E247528
(Alternative)	GUANGDONG XINYA ELECTRONICS TECHNOLOGY CO.,LTD	UL1015	AWG12-22; 600VAC; 105°C	IEC 60335-1 IEC 60335-2-40	Tested with appliance UL E247528
(Alternative)	ZHONGSHAN CITY SHENBAO ELECTRIC CO.,LTD	UL1015	AWG12-22; 600VAC; 105°C	IEC 60335-1 IEC 60335-2-40	Tested with appliance UL E247528
(Alternative)	FOSHAN SHUNDE BAOSHENG ELECTRONICS CO.,LTD	UL1015	AWG12-22; 600VAC; 105°C	IEC 60335-1 IEC 60335-2-40	Tested with appliance UL E247528
(Alternative)	LICHANG CONNECTOR INDUSTRYCO.,LTD	UL1015	AWG12-22; 600VAC; 105°C	IEC 60335-1 IEC 60335-2-40	Tested with appliance UL E247528
(Alternative)	LTK WIRING CO.,LTD	UL1015	AWG12-22; 600VAC; 105°C	IEC 60335-1 IEC 60335-2-40	Tested with appliance UL E247528
(Alternative)	HESHAN CITY TEHSING HUANCHIU ELECTRIC CABLE CO.,LTD	UL1015	AWG12-22; 600VAC; 105°C	IEC 60335-1 IEC 60335-2-40	Tested with appliance UL E247528

IEC 60335-2-40					
Clause	Requirement + Test			Result - Remark	Verdict
(Alternative)	GUANGDONG LINOYA ELECTRONIC TECHNOLOGY CO.,LTD	UL1015	AWG12-22; 600VAC; 105°C	IEC 60335-1 IEC 60335-2-40	Tested with appliance UL E315619
(Alternative)	GUANGZHOU KAIHENG ENTERPRISE GROUP	UL1015	AWG12-22; 600VAC; 105°C	IEC 60335-1 IEC 60335-2-40	Tested with appliance UL E247528
(Alternative)	SHENZHEN QIFURUI ELECTRONICS CO.,LTD	UL1015	AWG12-22; 600VAC; 105°C	IEC 60335-1 IEC 60335-2-40	Tested with appliance UL E247528
(Alternative)	FOSHAN ZHUOSHENG GREEN WIRE CO.,LTD	UL1015	AWG12-22; 600VAC; 105°C	IEC 60335-1 IEC 60335-2-40	Tested with appliance UL E247528
(Alternative)	LS CABLE(WUXI) CO.,LTD	UL1015	AWG12-22; 600VAC; 105°C	IEC 60335-1 IEC 60335-2-40	Tested with appliance UL E247528
(Alternative)	GUANGZHOU ZHONGTE ELECTRICAL MATERIAL CO.,LTD	UL1015	AWG12-22; 600VAC; 105°C	IEC 60335-1 IEC 60335-2-40	Tested with appliance UL E247528
(Alternative)	CHAU'S ELECTRICAL CO.,LTD	UL1015	AWG12-22; 600VAC; 105°C	IEC 60335-1 IEC 60335-2-40	Tested with appliance UL E247528
(Alternative)	FOSHAN SHUNDE ZHANLIANG INDUSTRIALIST CO.,LTD	UL1015	AWG12-22; 600VAC; 105°C	IEC 60335-1 IEC 60335-2-40	Tested with appliance UL E247528
(Alternative)	DONGGUAN JINONG ELECTRONICS CO.,LTD	UL1015	AWG12-22; 600VAC; 105°C	IEC 60335-1 IEC 60335-2-40	Tested with appliance UL E247528
(Alternative)	WUHU SHUNCHENG ELECTRONICS CO.,LTD	UL1015	AWG12-22; 600VAC; 105°C	IEC 60335-1 IEC 60335-2-40	Tested with appliance UL E247528

IEC 60335-2-40					
Clause	Requirement + Test			Result - Remark	Verdict
(Alternative)	WUHU SHUNCHENG ELECTRONICS CO.,LTD	UL1007	300V; 80°C; AWG16-32	IEC 60335-1 IEC 60335-2-40	Tested with appliance UL E247528
(Alternative)	DONGGUAN JINONG ELECTRONICS CO.,LTD	UL1007	300V; 80°C; AWG16-32	IEC 60335-1 IEC 60335-2-40	Tested with appliance UL E247528
(Alternative)	FOSHAN SHUNDE ZHANLIANG INDUSTRIALIST CO.,LTD	UL1007	300V; 80°C; AWG16-32	IEC 60335-1 IEC 60335-2-40	Tested with appliance UL E247528
(Alternative)	YUEQING GUOXIN ELECTRIC WIRE FACTORY	UL1007	300V; 80°C; AWG16-32	IEC 60335-1 IEC 60335-2-40	Tested with appliance UL E247528
(Alternative)	CHANGZHOU HONGCHANG ELECTRONICS CO.,LTD	UL1007	300V; 80°C; AWG16-32	IEC 60335-1 IEC 60335-2-40	Tested with appliance UL E247528
(Alternative)	HUASHENG ELECTRICAL INDUSTRIAL CO.,LTD	UL1007	300V; 80°C; AWG16-32	IEC 60335-1 IEC 60335-2-40	Tested with appliance UL E247528
(Alternative)	GUANGDONG PROVINCE GUANGZHOU PANYU CABLE WORKS CO.,LTD PANYU CABLE FACTORY	UL1007	300V; 80°C; AWG16-32	IEC 60335-1 IEC 60335-2-40	Tested with appliance UL E247528
(Alternative)	GUANGDONG XINYA ELECTRONICS TECHNOLOGY CO.,LTD	UL1007	300V; 80°C; AWG16-32	IEC 60335-1 IEC 60335-2-40	Tested with appliance UL E247528
(Alternative)	ZHONGSHAN CITY SHENBAO ELECTRIC CO.,LTD	UL1007	300V; 80°C; AWG16-32	IEC 60335-1 IEC 60335-2-40	Tested with appliance UL E247528

IEC 60335-2-40					
Clause	Requirement + Test			Result - Remark	Verdict
(Alternative)	FOSHAN SHUNDE BAOSHENG ELECTRONICS CO.,LTD	UL1007	300V; 80°C; AWG16-32	IEC 60335-1 IEC 60335-2-40	Tested with appliance UL E247528
(Alternative)	LICHANG CONNECTOR INDUSTRY CO.,LTD	UL1007	300V; 80°C; AWG16-32	IEC 60335-1 IEC 60335-2-40	Tested with appliance UL E247528
(Alternative)	LTD WIRING CO.,LTD	UL1007	300V; 80°C; AWG16-32	IEC 60335-1 IEC 60335-2-40	Tested with appliance UL E247528
(Alternative)	HESHAN CITY TEHSING HUANCHIU ELECTRIC CABLE CO.,LTD	UL1007	300V; 80°C; AWG16-32	IEC 60335-1 IEC 60335-2-40	Tested with appliance UL E247528
(Alternative)	GUANGDONG LINOYA ELECTRONIC TECHNOLOGY CO.,LTD	UL1007	300V; 80°C; AWG16-32	IEC 60335-1 IEC 60335-2-40	Tested with appliance UL E315619
(Alternative)	GUANGZHOU KAIHENG ENTERPRISE GROUP	UL1007	300V; 80°C; AWG16-32	IEC 60335-1 IEC 60335-2-40	Tested with appliance UL E247528
(Alternative)	SHENZHEN QIFURUI ELECTRONICS CO.,LTD	UL1007	300V; 80°C; AWG16-32	IEC 60335-1 IEC 60335-2-40	Tested with appliance UL E247528
(Alternative)	FOSHAN ZHUOSHENG GREEN WIRE CO.,LTD	UL1007	300V; 80°C; AWG16-32	IEC 60335-1 IEC 60335-2-40	Tested with appliance UL E247528
(Alternative)	LS CABLE(WUXI) CO.,LTD	UL1007	300V; 80°C; AWG16-32	IEC 60335-1 IEC 60335-2-40	Tested with appliance UL E247528
(Alternative)	GUANGZHOU ZHONGTE ELECTRICAL MATERIAL CO.,LTD	UL1007	300V; 80°C; AWG16-32	IEC 60335-1 IEC 60335-2-40	Tested with appliance UL E247528

IEC 60335-2-40					
Clause	Requirement + Test			Result - Remark	Verdict
(Alternative)	CHAU'S ELECTRICAL CO.,LTD	UL1007	300V; 80°C; AWG16-32	IEC 60335-1 IEC 60335-2-40	Tested with appliance UL E247528
12. PVC tube	DAE CHANG ELECCOM CO., LTD.	DC-6	600VAC; 105°C	IEC 60335-1 IEC 60335-2-40	Tested with appliance UL E120268
(Alternative)	LIANDA CO., LTD.	LHX-01	600VAC; 105°C	IEC 60335-1 IEC 60335-2-40	Tested with appliance UL E218446
(Alternative)	Guangzhou Pu Sheng Electronics Insulating Material Co., Ltd.	GX-600	600VAC; 105°C	IEC 60335-1 IEC 60335-2-40	Tested with appliance UL E248681
(Alternative)	CHANGZHOU SHI YU WANG PLASTIC CO., LTD	WS3-14	600VAC; 105°C	IEC 60335-1 IEC 60335-2-40	Tested with appliance UL E238569
(Alternative)	SHENZHEN WOER HEAT-SHRINKABLE MATERIAL CO LTD	RSFR-H or SBRS	600VAC; 105° or 125°C; VW-1	IEC 60335-1 IEC 60335-2-40	Tested with appliance UL E203950
(Alternative)	ZHONGSHAN FENGYU ELECTRICAL PARTS CO LTD	FY-600	600VAC; 105°C; VW-1	IEC 60335-1 IEC 60335-2-40	Tested with appliance UL E314739
(Alternative) only for fan motor	KAI DA XIN	Ø8, Ø10, Ø12	750VAC; 105°C; VW-1	IEC 60335-1 IEC 60335-2-40	Tested with appliance
(Alternative) only for fan motor	LIANDA CO.LTD.	HB	750VAC; 105°C; VW-1	IEC 60335-1 IEC 60335-2-40	Tested with appliance
(Alternative)	HENG HUI CHANG INSULATION MATERIAL CO LTD	HHC-01	600VAC/750VAC; 105°C	IEC 60335-1 IEC 60335-2-40	Tested with appliance UL E238569
13、 4-way valve	Zhejiang Dunan Hetian Metal Co.,Ltd	DSF-9-R410A	AC220-240V; 50/60Hz; 7/5W; Class B	EN/IEC 60730-1	VDE 40013212

IEC 60335-2-40					
Clause	Requirement + Test			Result - Remark	Verdict
(Alternative)	Zhejiang Sanhua Climate&Appliance Controls Group Co.,Ltd(Zhejiang Sanhua Group Co.,Ltd.)	SHF-7H-34U or SHF-7H-34U-P	AC220-240V; 50/60Hz; 4,5/3,5W; Class B	EN/IEC 60730-1	VDE 40003240
(Alternative)	Anhui Tianda Electronic Science & Technology Co.,Ltd	DSF-9-R410A	AC220-240V; 50/60Hz; 5-8W; Class B	EN/IEC 60730-1	TUV PS B030744665 003
(Alternative)	Foshan Hualu Automatic Controls Ltd	STF-0201G	AC220-240V; 50/60Hz; 6/5W; Class B	EN/IEC 60730-1	VDE 40018984
(Alternative)	Zhejiang Chunhui Intelligent Controlco.Ltd	DHF-9	AC220-240V; 50/60Hz; 4-7W; Class B	EN/IEC 60730-1	TUV Rh B080147761 012
(Alternative)	Henan Yuanquan Electron Co.,Ltd.	DSF-09	AC220-240V; 50/60Hz; 5.5W/3.5W; Class B	EN/IEC 60730-1	VDE 15053320
14、Indoor Controller	Gd Midea Air-Conditioning Equipment Co., Ltd.	CE-KCR35/E1Y-B.D.04.NP1-4	220-240VAC; 50Hz	IEC 60335-2-40 IEC 60335-1	Test with appliance
An asterisk indicates a mark which assures the agreed level of surveillance.					

24.5	Voltage across the capacitor			P
	Appliances operated: at 1,1 times rated voltage (V):		264	
Part	tested (V)	rated (V)	required (V)	
Indoor fan motor capacitor	310	450	495	
Outdoor fan motor capacitor	338	450	495	
Compressor capacitor	355	370	407	
Remark: The tests were carried out on all models, the higher results were recorded.				

28.1	TABLE: Threaded part torque test			P
Threaded part identification	Diameter of thread (mm)	Column number (I, II, or III)	Applied torque (Nm)	
Fixed screw (for indoor control cover)	3,9	II	1,2	
Fixed screw (for anchorage for supply cord)	3,9	II	1,2	
Fixed screw in terminal	3,9	II	1,2	

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
Indoor fixed screw (anchorage for interconnection cable)	3,9	II	1,2
Outdoor fixed screw (anchorage for interconnection cable)	3,9	II	1,2
Screw fixed outdoor side cover	3,9	II	1,2
Screw fixing earthing continuity connections	3,9	II	1,2
Supplementary information: --			

29.1	TABLE: Clearances					P
	Overvoltage category	II			—	
		Type of insulation:				
Rated impulse voltage (V):	Min. cl (mm)	Basic (mm)	Supplementary (mm)	Reinforced (mm)	Functional (mm)	Verdict / Remark
330	0,2* / 0,5 / 0,8**	--	--	--	--	N/A
500	0,2* / 0,5 / 0,8**	--	--	--	--	N/A
800	0,2* / 0,5 / 0,8**	--	--	--	--	N/A
1 500	0,5 / 0,8** / 1,0***	--	--	--	--	N/A
2 500	1,5 / 2,0***	2,5	5,0	--	3,7	P
4 000	3,0 / 3,5***	--	--	10,5	--	P
6 000	5,5 / 6,0***	--	--	--	--	N/A
8 000	8,0 / 8,5***	--	--	--	--	N/A
10 000	11,0 / 11,5***	--	--	--	--	N/A

Supplementary information:

*) For tracks on printed circuit boards if pollution degree 1 and 2

***) For pollution degree 3

****) If the construction is affected by wear, distortion, movement of the parts or during assembly

1. The clearance for basic insulation between winding and metal enclosure of fan motor is 2,5mm.
2. The clearance for basic insulation on PCB is 3,0mm.
3. The clearance for basic insulation between terminal block L and electric box is 6,5mm.
4. The clearance for function insulation between terminal block L and N is 4,6mm.
5. The clearance for function insulation on PCB is 3,7mm.
6. The clearance for supplementary insulation between internal wire to accessible surface is 5,0mm.
7. The clearance for reinforce insulation between inner live part and accessible surface is 10,5mm.

29.2	TABLE: Creepage distances, basic, supplementary and reinforced insulation	P
------	---	---

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict

Working voltage (V)	Creepage distance (mm) Pollution degree							Type of insulation			Verdict
	1	2			3						
		Material group			Material group						
		I	II	IIIa/IIIb	I	II	IIIa/IIIb*	B**	S**	R**	
≤50	0,18	0,6	0,85	1,2	1,5	1,7	1,9		—	—	N/A
≤50	0,18	0,6	0,85	1,2	1,5	1,7	1,9	—		—	N/A
≤50	0,36	1,2	1,7	2,4	3,0	3,4	3,8	—	—		N/A
125	0,28	0,75	1,05	1,5	1,9	2,1	2,4		—	—	N/A
125	0,28	0,75	1,05	1,5	1,9	2,1	2,4	—		—	N/A
125	0,56	1,5	2,1	3,0	3,8	4,2	4,8	—	—		N/A
250	0,56	1,25	1,8	2,5	3,2	3,6	4,0	4,6	—	—	P
250	0,56	1,25	1,8	2,5	3,2	3,6	4,0	—	4,8	—	P
250	1,12	2,5	3,6	5,0	6,4	7,2	8,0	—	—	10,5	P
400	1,0	2,0	2,8	4,0	5,0	5,6	6,3		—	—	N/A
400	1,0	2,0	2,8	4,0	5,0	5,6	6,3	—		—	N/A
400	2,0	4,0	5,6	8,0	10,0	11,2	12,6	—	—		N/A
500	1,3	2,5	3,6	5,0	6,3	7,1	8,0		—	—	N/A
500	1,3	2,5	3,6	5,0	6,3	7,1	8,0	—		—	N/A
500	2,6	5,0	7,2	10,0	12,6	14,2	16,0	—	—		N/A
>630 and ≤800	1,8	3,2	4,5	6,3	8,0	9,0	10,0		—	—	N/A
>630 and ≤800	1,8	3,2	4,5	6,3	8,0	9,0	10,0	—		—	N/A
>630 and ≤800	3,6	6,4	9,0	12,6	16,0	18,0	20,0	—	—		N/A
>800 and ≤1000	2,4	4,0	5,6	8,0	10,0	11,0	12,5		—	—	N/A
>800 and ≤1000	2,4	4,0	5,6	8,0	10,0	11,0	12,5	—		—	N/A
>800 and ≤1000	4,8	8,0	11,2	16,0	20,0	22,0	25,0	—	—		N/A
>1000 and ≤1250	3,2	5,0	7,1	10,0	12,5	14,0	16,0		—	—	N/A
>1000 and ≤1250	3,2	5,0	7,1	10,0	12,5	14,0	16,0	—		—	N/A
>1000 and ≤1250	6,4	10,0	14,2	20,0	25,0	28,0	32,0	—	—		N/A
>1250 and ≤1600	4,2	6,3	9,0	12,5	16,0	18,0	20,0		—	—	N/A
>1250 and ≤1600	4,2	6,3	9,0	12,5	16,0	18,0	20,0	—		—	N/A
>1250 and ≤1600	8,4	12,6	18,0	25,0	32,0	36,0	40,0	—	—		N/A
>1600 and ≤2000	5,6	8,0	11,0	16,0	20,0	22,0	25,0		—	—	N/A
>1600 and ≤2000	5,6	8,0	11,0	16,0	20,0	22,0	25,0	—		—	N/A

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict

29.2	TABLE: Creepage distances, basic, supplementary and reinforced insulation										P
Working voltage (V)	Creepage distance (mm) Pollution degree							Type of insulation			Verdict
	1	2			3						
		Material group			Material group						
		I	II	IIIa/IIIb	I	II	IIIa/IIIb*	B**	S**	R**	
>1600 and ≤2000	11,2	16,0	22,0	32,0	40,0	44,0	50,0	—	—		N/A
>2000 and ≤2500	7,5	10,0	14,0	20,0	25,0	28,0	32,0		—	—	N/A
>2000 and ≤2500	7,5	10,0	14,0	20,0	25,0	28,0	32,0	—		—	N/A
>2000 and ≤2500	15,0	20,0	28,0	40,0	50,0	56,0	64,0	—	—		N/A
>2500 and ≤3200	10,0	12,5	18,0	25,0	32,0	36,0	40,0		—	—	N/A
>2500 and ≤3200	10,0	12,5	18,0	25,0	32,0	36,0	40,0	—		—	N/A
>2500 and ≤3200	20,0	25,0	36,0	50,0	64,0	72,0	80,0	—	—		N/A
>3200 and ≤4000	12,5	16,0	22,0	32,0	40,0	45,0	50,0		—	—	N/A
>3200 and ≤4000	12,5	16,0	22,0	32,0	40,0	45,0	50,0	—		—	N/A
>3200 and ≤4000	25,0	32,0	44,0	64,0	80,0	90,0	100,0	—	—		N/A
>4000 and ≤5000	16,0	20,0	28,0	40,0	50,0	56,0	63,0		—	—	N/A
>4000 and ≤5000	16,0	20,0	28,0	40,0	50,0	56,0	63,0	—		—	N/A
>4000 and ≤5000	32,0	40,0	56,0	80,0	100,0	112,0	126,0	—	—		N/A
>5000 and ≤6300	20,0	25,0	36,0	50,0	63,0	71,0	80,0		—	—	N/A
>5000 and ≤6300	20,0	25,0	36,0	50,0	63,0	71,0	80,0	—		—	N/A
>5000 and ≤6300	40,0	50,0	72,0	100,0	126,0	142,0	160,0	—	—		N/A
>6300 and ≤8000	25,0	32,0	45,0	63,0	80,0	90,0	100,0		—	—	N/A
>6300 and ≤8000	25,0	32,0	45,0	63,0	80,0	90,0	100,0	—		—	N/A
>6300 and ≤8000	50,0	64,0	90,0	126,0	160,0	180,0	200,0	—	—		N/A
>8000 and ≤10000	32,0	40,0	56,0	80,0	100,0	110,0	125,0		—	—	N/A
>8000 and ≤10000	32,0	40,0	56,0	80,0	100,0	110,0	125,0	—		—	N/A
>8000 and ≤10000	64,0	80,0	112,0	160,0	200,0	220,0	250,0	—	—		N/A
>10000 and ≤12500	40,0	50,0	71,0	100,0	125,0	140,0	160,0		—	—	N/A
>10000 and ≤12500	40,0	50,0	71,0	100,0	125,0	140,0	160,0	—		—	N/A
>10000 and ≤12500	80,0	100,0	142,0	200,0	250,0	280,0	320,0	—	—		N/A

IEC 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict

29.2	TABLE: Creepage distances, basic, supplementary and reinforced insulation	P
-------------	--	---

Working voltage (V)	Creepage distance (mm) Pollution degree							Type of insulation			Verdict
	1	2			3						
		Material group			Material group						
		I	II	IIIa/IIIb	I	II	IIIa/IIIb*	B**	S**	R**	

Supplementary information:

*) Material group IIIb is allowed if the working voltage does not exceed 50 V

**) B = Basic insulation, S = Supplementary insulation, R = Reinforced insulation

1. The creepage distance for basic insulation on PCB is 4,6mm.
2. The creepage distance for basic insulation between terminal block L and electric box is 6,5mm.
3. The creepage distance for supplementary insulation between showing PCB and accessible surface is 4,8mm.
4. The creepage distance for reinforce insulation between inner live part and accessible surface is 10,5mm.

29.2	TABLE: Creepage distances, functional insulation	P
-------------	---	---

Working voltage (V)	Creepage distance (mm) Pollution degree							Verdict / Remark
	1	2			3			
		Material group			Material group			
		I	II	IIIa/IIIb	I	II	IIIa/IIIb*	
≤10	0,08	0,4	0,4	0,4	1,0	1,0	1,0	N/A
50	0,16	0,56	0,8	1,1	1,4	1,6	1,8	N/A
125	0,25	0,71	1,0	1,4	1,8	2,0	2,2	N/A
250	0,42	1,0	1,4	2,0	2,5	2,8	3,2	P
400	0,75	1,6	2,2	3,2	4,0	4,5	5,0	N/A
500	1,0	2,0	2,8	4,0	5,0	5,6	6,3	N/A
>630 and ≤800	1,8	3,2	4,5	6,3	8,0	9,0	10,0	N/A
>800 and ≤1000	2,4	4,0	5,6	8,0	10,0	11,0	12,5	N/A
>1000 and ≤1250	3,2	5,0	7,1	10,0	12,5	14,0	16,0	N/A
>1250 and ≤1600	4,2	6,3	9,0	12,5	16,0	18,0	20,0	N/A
>1600 and ≤2000	5,6	8,0	11,0	16,0	20,0	22,0	25,0	N/A
>2000 and ≤2500	7,5	10,0	14,0	20,0	25,0	28,0	32,0	N/A
>2500 and ≤3200	10,0	12,5	18,0	25,0	32,0	36,0	40,0	N/A
>3200 and ≤4000	12,5	16,0	22,0	32,0	40,0	45,0	50,0	N/A

IEC 60335-2-40									
Clause	Requirement + Test							Result - Remark	Verdict
>4000 and ≤5000	16,0	20,0	28,0	40,0	50,0	56,0	63,0	N/A	
>5000 and ≤6300	20,0	25,0	36,0	50,0	63,0	71,0	80,0	N/A	
>6300 and ≤8000	25,0	32,0	45,0	63,0	80,0	90,0	100,0	N/A	
>8000 and ≤10000	32,0	40,0	56,0	80,0	100,0	110,0	125,0	N/A	
>10000 and ≤12500	40,0	50,0	71,0	100,0	125,0	140,0	160,0	N/A	
Supplementary information:									
* ¹) Material group IIIb is allowed if the working voltage does not exceed 50 V									
1. The creepage distance for function insulation on PCB is 4,6mm.									
2. The creepage distance for function insulation between terminal block L and N is 5,0mm.									

IEC 60335-2-40

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

30		TABLE: Resistance to heat and fire																		
Object/ part No.	Manufacturer/ trademark	Type/ model	Ball pressure test °C				Glow wire test (GWT) °C						Glow-wire flammability index (GWFI) °C				Glow- wire ignition temp. (GWIT) °C		Needle- flame test (NFT)	Verdict
			75	125	cl. 11 +40	cl. 19 +25	550	650		750		850	550	650	750	850	675	775		
								te	ti	te	ti									
Plastic enclosure	--	--	1,4				√													P
Power cord anchorage	--	--	0,7				√													P
Bobbin of transformer	--	--		1,1						7)	7)	√								P
Indoor terminal block	--	--		1,5						7)	7)	√								P
Outdoor terminal block	--	--		1,1						7)	7)	√								P
Connector	--	--		1,7						7)	7)	√								P
Indoor electrical	--	--		1,1						7)	7)	√								P

IEC 60335-2-40

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

box																				
Fan motor capacitor	--	--	1,4						7)	7)	√									P
X2 capacitor	--	--	1,3						7)	7)	√									P
Varistor	--	--	1,2						7)	7)	√									P
AC contactor	--	--	1,3						7)	7)	√									P
Relay enclosure	--	--							7)	7)	√									P
PCB	--	--																	√	P

Supplementary information:

- 1) Parts of material classified at least HB40 or if relevant HBF
- 2) Parts of material classified as V-0 or V-1
- 3) Flame persisting longer than 2 s (= t_e – t_i) need only be reported for unattended appliances
- 4) Surrounding parts subjected to the needle-flame test of annex E
- 5) Base material classified as V-0 or if relevant VTM-0
- 6) The GWIT pre-selection option, the 850 °C GWF1 pre-selection option, and the 850 °C GWT are not applicable for attended appliances
- 7) No flame

Appendix EMF				N/A
	TEST: Evaluation of the magnetic fields			--
Applied standards:	IEC 62233:2005, EN 62233:2008 (incl. Corr.1:2008)			--
Method	Used method: 5.5.2 Time domain evaluation			--
Applied Limit	ICNIRP Guidelines			--
Identification of the appliance	Type of apparatus	--		
	Rated Voltage	--		
	Rated Frequency	--		
Parameters required prior to the test	Laboratory Ambient Temperature	25 °C ± 10 °C		
	Supply Voltage	(Rated Voltage ± 2 %) V		
	Supply Frequency	(Rated Frequency ± 2 %) Hz		
Parameters recorded during the test	Laboratory Ambient Temperature	--		
	Supply Voltage	--		
	Supply Frequency	--		
Operating Mode	--			
Method 5.5.2				
Measuring Positions	Measuring Distance	Coupling Factor	Measurement Uncertainty	
Around	30 cm	0,18	-	
Frequency (kHz)	Limit (%)	Measured Maximum Value (%)		
0,01 to 400	100	--		
Supplementary information:				
The measured maximum value in this table may be weighted with the coupling factor if applicable, and the measurement uncertainty is applied if the measured result is more than 75 % of the limit.				

Attachment No. 1

IEC 60335-1:2010/A1:2013

Household and similar electrical appliances - Safety - Part 1: General requirements

Attachment contains

Cover page:	1 page
Requirements:	10 pages
Total:	11 pages

Explanation for Abbreviations:

Possible Verdicts: **P** = Pass, **F**= Fail, **N/A** = Not Applicable

Remarks:

Throughout this report, a point is used as the decimal separator.

IEC 60335-1:2010/A1:2013			
Clause	Requirement –Test	Result - Remark	Verdict
5.17	Replace the existing text by the following:		--
	Appliances powered by rechargeable batteries that are recharged in the appliance are tested in accordance with Annex B.		N/A
	Battery-operated appliances powered by batteries		N/A

	that are non-rechargeable or not recharged in the appliance are tested in accordance with Annex S.		
7.1	Add the following new paragraph after Note 4:		--
	Class II appliances and class III appliances incorporating a functional earth shall be marked with the symbol IEC 60417-5018 (2011-07).	Class I appliance	N/A
7.3	In Note 3, replace the text of the example by the following:		--
	EXAMPLE: 230 V/400 V 3N: The appliance is only suitable for the voltage values indicated, 230 V being for single-phase, a.c. operation and 400 V 3N for three-phase, a.c. with neutral operation (an appliance with terminals for both supplies).		N/A
7.4	Replace the requirement by the following:		--
	If the appliance can be adjusted for different rated voltages or rated frequencies, the voltage or the frequency to which the appliance is adjusted shall be clearly discernible. If frequent changes in voltage setting or frequency setting are not required, this requirement is considered to be met if the rated voltage or rated frequency to which the appliance is to be adjusted can be determined from a wiring diagram fixed to the appliance.		N/A
7.6	Replace [symbol ISO 7000-0434 (2004-01)] by [symbol ISO 7000-0434A (2004-01)].		N/A
7.8	Add the following to the first paragraph of the requirement:		--
	- Functional earthing terminals shall be indicated by symbol IEC 60417-5018 (2011-07).		N/A
7.12	Delete "for use" in the first paragraph and in the Note.		--
	Add the following after the existing last paragraph of the requirement:		--
	For appliances intended for use at altitudes exceeding 2 000 m, the maximum altitude of use shall be stated.		N/A
	The instructions for appliances incorporating a functional earth shall state the substance of the following:		N/A
	This appliance incorporates an earth connection for functional purposes only.		N/A
7.12.1	Add the following text:		--
	For appliances marked with different rated voltages or different rated frequencies (separated by a /), instructions shall be included to indicate to the user or installer what action must be taken to adjust the appliance for operation at the required rated voltage or rated frequency.		N/A
7.15	Add the following:		--
	The symbol IEC 60417-5018 (2011-07) shall be placed next to the symbol IEC 60417-5172 (2003-02) or the symbol IEC 60417-5180 (2003-02) as appropriate.		N/A
8.1.1	Delete the Note.		N/A
10.1	Replace the penultimate paragraph of the test specification by the following:		--
	If the power input varies throughout the operating cycle and the maximum value of the power input		N/A

	exceeds, by a factor greater than two, the arithmetic mean value of the power input occurring during a representative period, then the power input is the maximum value that is exceeded for more than 10 % of the representative period. Otherwise the power input is taken as the arithmetic mean value.		
10.2	Replace the penultimate paragraph of the test specification by the following:		--
	If the current varies throughout the operating cycle and the maximum value of the current exceeds, by a factor greater than two, the arithmetic mean value of the current occurring during a representative period, then the current is the maximum value that is exceeded for more than 10 % of the representative period. Otherwise the current is taken as the arithmetic mean value.		N/A
11.8	Delete the second sentence of the first paragraph.		--
	Table 3 – Maximum normal temperature rises After the entry for pins of appliance inlets, add the following new entry: Pins of appliances for insertion into socket-outlets(45°C)		N/A
	Replace the second to last, third to last and fourth to last entries in Table 3 by the following table		--
	Add the following footnotes to Table 3:		--
	k-The temperature rise limits of controls actuated by contact or proximity of a finger, with no movement of the contact surface also includes all surfaces within 5 mm of such controls, regardless of their shape.		N/A
	l-The temperature rise limit of plastic also applies for plastic material having a metal finish of thickness less than 0,1 mm.		N/A
	m- When the thickness of the plastic coating does not exceed 0,4 mm, the temperature rise limits of the coated metal or of glass and ceramic material apply.		N/A
	n- Metal is considered coated when a coating having a minimum thickness of 90 µm made by enamel, powder or non-substantially plastic coating is used.		N/A
13.2	In the first paragraph, after “class II appliances” add “, class II constructions” and replace the second sentence by the following:		N/A
	For class 0I appliances and class I appliances, C may be replaced by a low impedance ammeter responding to the rated frequency of the appliance.		N/A
	Replace the second paragraph by the following:		--
	The leakage current is measured between any pole of the supply and		--
	- accessible metal parts intended to be connected to protective earth, for class I appliances and class 0I appliances;		N/A
	- metal foil having an area not exceeding 20 cm × 10 cm which is in contact with accessible surfaces of insulating material and metal parts not intended to be connected to protective earth, for class 0 appliances, class II appliances, class II constructions and class III appliances.	Class II construction	N/A
	Replace the fourth paragraph by the following:		--

	For single-phase appliances, the measuring circuit is shown in the following figures:		--
	- If they are class II appliances or parts of class II construction, Figure 1;	Class II construction	P
	- If they are neither class II appliances nor parts of class II construction, Figure 2.		N/A
	Replace the sixth paragraph by the following:		--
	For three-phase with neutral (3N~) connected appliances, the measuring circuit is shown in the following figures:		--
	- if they are class II appliances or parts of class II construction, Figure 3;		N/A
	-if they are neither class II appliances nor parts of class II construction, Figure 4.		N/A
	Delete "For three-phase appliances," from the first sentence of the seventh paragraph.		N/A
	Replace the third sentence of the seventh paragraph by the following:		--
	For three-phase without neutral (3~) connected appliances, the measuring circuit in Figure 3 or Figure 4 shall be used as applicable, but the neutral is not connected to the appliance		N/A
	In the existing eighth paragraph, replace the first dashed item by the following:		--
	- for class II appliances and for parts of class II construction 0,35mA peak	class II construction	P
15.2	Replace the first paragraph of the test specification by the following:		-
	Compliance is checked by the following test using a spillage solution comprising water containing approximately 1 % NaCl and 0,6 % rinsing agent.		N/A
	Replace the fifth paragraph of the test specification by the following:		--
	The liquid container of the appliance is completely filled with the solution and a further quantity equal to 15 % of the capacity of the container or 0,25 l, whichever is the greater, is poured in steadily over a period of 1 min.		P
	Add the following new text as a penultimate paragraph:		--
	Any commercially available rinsing agent may be used, but if there is any doubt with regards to the test results, the rinsing agent shall have the following properties: - viscosity, 17 mPa·s; - pH, 2,2 (1 % in water).		N/A
16.2	Replace the first paragraph by the following:		--
	An a.c. test voltage is applied between live parts and		--
	- accessible metal parts intended to be connected to protective earth, for class I appliances and class 0I appliances;		P
	- metal foil having an area not exceeding 20 cm × 10 cm which is in contact with accessible surfaces of insulating material and metal parts not intended to be connected to protective earth, for class 0 appliances, class II appliances, class II constructions and class III appliances.	class II construction	P
	In the fourth paragraph, replace the first dashed item by the following:		--

	- for class II appliances and for parts of class II construction 0,25 mA	class II construction	P
19.7	Add the following to the fourth paragraph.		--
	If the timer or programmer is an electronic type that operates to ensure compliance with the test before the maximum period under the conditions of Clause 11 is reached, it is considered to be a protective electronic circuit as well as a control that operates under the conditions of Clause 11.		N/A
19.11.4.4	Replace the first paragraph by the following:		--
	The power supply terminals of the appliance are subjected to voltage surges in accordance with IEC 61000-4-5, five positive impulses and five negative impulses being applied at the selected points. An open circuit test voltage of 2 kV is applicable for the line-to-line coupling mode, a generator having a source impedance of 2Ω being used. An open circuit test voltage of 4 kV is applicable for the line-to-earth coupling mode, a generator having a source impedance of 12Ω being used.		N/A
22.5	In the requirement, replace “exceeding” by “equal to or greater than”.		N/A
	Add the following text after the existing last paragraph of the test specification. If compliance relies on the operation of an electronic circuit, the electromagnetic phenomena tests of 19.11.4.3 and 19.11.4.4 are applied one at a time to the appliance. The discharge test is then repeated three times and for each test, the voltage shall not exceed 34 V.		N/A
22.32	Replace the words ‘Insulating material’ at the beginning of the 4th paragraph of the requirement by ‘Ceramic and similar porous material’ and combine this paragraph with the third paragraph of the requirement.		N/A
22.33	Add the following to the first sentence of the first paragraph of the requirement:		--
	“Or unearthed metal parts that are separated from live parts by basic insulation only.”		N/A
22.35	In the second paragraph of the requirement add ‘and cordless appliances’ after stationary appliances’.		N/A
	Add the following note after the requirement:		--
	NOTE A cordless appliance is an appliance that is connected to the supply only when placed on its associated stand.		N/A
22.53	Class II appliances and class III appliances that incorporate functionally earthed parts shall have at least double insulation or reinforced insulation between live parts and the functionally earthed parts.		N/A
	Compliance is checked by inspection and test.		N/A
22.54	Button cells and batteries designated R1 shall not be accessible without the aid of a tool unless the cover of their compartment can only be opened after at least two independent movements have been applied simultaneously.		N/A

	Compliance is checked by inspection and by manual test.		N/A
23.5	Replace Note 2 by the following text.		--
	For class II construction, the requirements for supplementary insulation and reinforced insulation apply except that the sheath of a cord complying with IEC 60227 or IEC 60245 may provide supplementary insulation		P
	A single layer of internal wiring insulation does not provide reinforced insulation.		P
24.1	Replace Notes 1, 2, 3 and 4 by the following, and renumber Note 5 to Note 2.		--
	Compliance with the IEC standard for the relevant component does not necessarily ensure compliance with the requirements of this standard.		P
	Motors are not required to comply with IEC 60034-1. They are tested as part of the appliance according to this standard.		P
	Relays shall be tested as part of the appliance according to this standard. They may be alternatively tested to IEC 60730-1, in which case they must also meet the additional requirements in IEC 60335-1.		N/A
	Unless otherwise specified, the requirements of Clause 29 of this standard apply between live parts of components and accessible parts of the appliance. Unless otherwise specified, components may comply with the requirements for clearances and creepage distances for functional insulation as specified in the relevant component standard.		P
	Unless otherwise specified, the requirements of 30.2 of this standard apply to parts of non-metallic material in components including parts of non-metallic material supporting current-carrying connections inside components.		N/A
	Components that have not been previously tested and shown to comply with the IEC standard for the relevant component are tested according to the requirements of 30.2 of this standard.		P
	Components that have been previously tested and shown to comply with the resistance to fire requirements in the IEC standard for the relevant component need not be retested provided that		N/A
	- the severity specified in the component standard is not less than the severity specified in 30.2 of this standard, and		N/A
	- Unless the pre-selection alternatives in 30.2 are used, the test report for the component states the values of t_e and t_i , as required by IEC 60695-2-11.		N/A
	If the above two conditions are not satisfied, the component shall be tested as part of the appliance.		N/A
	Power electronic converter circuits are not required to comply with IEC 62477-1. They are tested as part of the appliance according to this standard		N/A
24.1.2	Add the following text as a new first paragraph.		-
	The relevant standard for transformers in associated switch mode power supplies is Annex BB of IEC 61558-2-16. Clause 26 of IEC 61558-1 and Annex H		N/A

	of IEC 61558-1 are not applicable.		
24.1.4	Add the following new paragraph:		--
	Thermal cut-outs of the capillary type shall comply with the requirements for type 2.K controls in IEC 60730-2-9.		N/A
24.1.5	In the second sentence of the first paragraph, add "class II" before "appliances".		N/A
25.1	Replace the first dashed item of the requirement by the following:		-
	-supply cord fitted with a plug, the current rating and voltage rating of the plug being not less than the corresponding ratings of its associated appliance;		N/A
25.7	Delete the third dashed item in the first paragraph of the requirement.		N/A
25.10	Add the following as a new paragraph to the requirement.		--
	In multi-phase appliances, the colour of the neutral conductor of the supply cord, if any, shall be blue.		N/A
25.13	In the requirement, replace the second sentence by the following:		--
	If it is not evident from the construction of the appliance that the supply cord can be introduced without risk of damage, a non-detachable lining or non-detachable bushing shall be provided that complies with 29.3 for supplementary insulation.		N/A
25.15	Replace the second paragraph of the test specification by the following:		--
	A mark is made on the cord at a distance of approximately 20 mm from the cord anchorage or other suitable point. The mark is made while the cord is subjected to a pull force of		--
	- 100 N, for fixed appliances regardless of the mass of the appliance;		N/A
	- The value as shown in Table 12, for other appliances.		N/A
25.20	Delete "insulated" and "additionally" from the requirement.		N/A
27.1	In the first paragraph of the requirement replace "an insulation fault" by "a failure of basic insulation".		P
	Delete Note 1 and replace "Note 2" by "Note".		P
	Replace the third paragraph by the following:		--
	Class 0 appliances, class II appliances and class III appliances shall have no provision for protective earthing. Class II appliances and class III appliances may incorporate an earth for functional purposes.		N/A
27.2	Add the following paragraph to the requirement:		--
	These requirements are not applicable to class II appliances and class III appliances that incorporate an earth for functional purposes.		N/A
27.3	Add the following paragraph to the requirement:		--
	These requirements are not applicable to class II appliances and class III appliances that incorporate an earth for functional purposes.		N/A
27.4	Add the following paragraph to the requirement:		--
	These requirements are not applicable to class II appliances and class III appliances that incorporate an earth for functional purposes.		N/A

27.5	Add the following paragraph to the requirement:		--
	These requirements are not applicable to class II appliances and class III appliances that incorporate an earth for functional purposes.		N/A
	Replace existing Note 1 by the following as an addition to the existing second paragraph of the test specification.		N/A
	The test is carried out until steady conditions have been established.		P
	Replace existing Note 2 by the following as an addition to the last paragraph of the test specification.		P
	The resistance of the supply cord is not included in the resistance calculation.		P
	Renumber existing Note 3 as Note.		P
27.6	Add the following sentence to the requirement:		--
	This requirement is not applicable to class II appliances and class III appliances that incorporate an earth for functional purposes.		N/A
28.2	In the second paragraph of the requirement, replace bullets with dashes in the two bulleted items.		N/A
29.1	Add the following as a new second paragraph of the requirement:		--
	For appliances intended for use at altitudes exceeding 2000m, the clearances in Table 16 shall be increased according to the relevant multiplier values in Table A.2 of IEC 60664-1.		N/A
	Add the following to the existing second paragraph of the requirement:		--
	or to appliances intended for use at altitudes exceeding 2 000 m.		N/A
	Table 17 – Minimum creepage distances for basic insulation		--
	Replace Note 1 by the following:		--
	Lacquered conductors of windings are considered to be bare conductors but creepage distances for basic insulation in other than a double insulation construction need not be greater than the associated clearance specified in Table 16 taking into account 29.1.1.		N/A
29.3	Replace the third dashed item by the following: -for insulation, other than single layer internal wiring insulation, by an assessment of the thermal quality of the material combined with an electric strength test, in accordance with 29.3.3 and for accessible parts of reinforced insulation consisting of a single layer, by measurement in accordance with 29.3.4, or		N/A
	Add the following as the fourth dashed item of the test specification: – by an assessment of the thermal quality of the material according to 29.3.3 combined with an electric strength test in accordance with 23.5, for each single layer internal wiring insulation touching each other, or		N/A
Annex B	Replace the introductory text by the following:		-
	The following modifications to this standard are applicable for appliances powered by batteries that		N/A

	are recharged in the appliance.		
	NOTE 1 Rechargeable batteries are also referred to as secondary batteries		N/A
	NOTE 2 This Annex B does not apply to battery chargers (IEC 60335-2-29).		N/A
	These appliances take one of the following three forms of construction:		-
	a) The appliance can be supplied directly from the supply mains or a renewable energy source such as a solar cell, the battery charging circuitry and other supply unit circuitry being incorporated within the appliance.		N/A
	b) The part of the appliance incorporating the battery is supplied from the supply mains or a renewable energy source such as a solar cell, via a detachable supply unit. The battery charging circuitry is incorporated within the part of the appliance containing the battery. In this case, the complete appliance is the detachable supply unit plus the part of the appliance containing the battery and the battery charging circuitry.		N/A
	c) The part of the appliance incorporating the battery is supplied from the supply mains or a renewable energy source such as a solar cell, via a detachable supply unit. The battery charging circuitry is incorporated within the detachable supply unit. In this case, the complete appliance is the detachable supply unit with the battery charging circuitry plus the part of the appliance containing the battery.		N/A
	NOTE 3 Examples of the forms of construction covered by this Annex B are shown in Figure B.1.		N/A
	NOTE 4 If the appliance incorporates a non-rechargeable (primary) battery or a rechargeable (secondary) battery that must be removed from the appliance for charging, then Annex S is applicable. In this case, the appliance is simply a battery-operated appliance and the safety requirements for the battery charger for charging the rechargeable battery are contained in IEC 60335-2-29.		N/A
Annex H	Replace the text by the following:		-
	Clause 20 is applicable to clearances across full disconnection and micro-disconnection. It is also applicable to creepage distances for functional insulation, across full disconnection and micro-disconnection, as stated in Table 24.		N/A
Annex S	Battery-operated appliances powered by batteries that are non-rechargeable or not recharged in the appliance		--
5.8.1	Where the supply terminals for the connection of the battery have no indication of polarity, the more unfavourable polarity shall be applied.		N/A
5.S.101	Battery-operated appliances intended for use with a battery box are tested with the battery box supplied with the appliance or with the battery box recommended in the instructions.		N/A

5.S.102	Battery-operated appliances are tested as motor-operated appliances.		N/A						
7	Marking and instructions		-						
7.1	Battery-operated appliances shall be marked with the battery voltage and the polarity of the terminals unless the polarity is irrelevant.		--						
	Battery-operated appliances shall also be marked with the:		--						
	– name, trade mark or identification mark of the manufacturer or responsible vendor;		N/A						
	– model or type reference;		N/A						
	– IP number according to degree of protection against ingress of water, other than IPX0;		N/A						
	– type reference of battery or batteries.		N/A						
7.6	<table style="width: 100%; border: none;"> <tr> <td style="text-align: center;">+</td> <td style="text-align: center;">[symbol IEC 60417-5005 (2002-10)]</td> <td style="text-align: center;">plus; positive polarity</td> </tr> <tr> <td style="text-align: center;">-</td> <td style="text-align: center;">[symbol IEC 60417-5006 (2002-10)]</td> <td style="text-align: center;">minus; negative polarity</td> </tr> </table>	+	[symbol IEC 60417-5005 (2002-10)]	plus; positive polarity	-	[symbol IEC 60417-5006 (2002-10)]	minus; negative polarity		N/A
+	[symbol IEC 60417-5005 (2002-10)]	plus; positive polarity							
-	[symbol IEC 60417-5006 (2002-10)]	minus; negative polarity							
7.12	The instructions for battery-operated appliances shall contain the substance of the following, as applicable:		--						
	– the types of batteries that may be used;		N/A						
	– how to remove and insert the batteries;		N/A						
	– non-rechargeable batteries are not to be recharged;		N/A						
	– rechargeable batteries are to be removed from the appliance before being charged;		N/A						
	– different types of batteries or new and used batteries are not to be mixed;		N/A						
	– batteries are to be inserted with the correct polarity;		N/A						
	– exhausted batteries are to be removed from the appliance and safely disposed of;		N/A						
	– if the appliance is to be stored unused for a long period, the batteries should be removed;		N/A						
	– the supply terminals are not to be short-circuited.		N/A						
11	Heating		--						
11.5	By means of an external power supply, battery-operated appliances are supplied at the terminals for the connection of the battery with the most unfavourable supply voltage between		--						
	– 0,55 and 1,0 times the battery voltage, if the appliance can be used with non-rechargeable batteries;		N/A						
	– 0,75 and 1,0 times battery voltage, if the appliance is designed for use with rechargeable batteries only.		N/A						
19	Abnormal operation		--						
19.1	For battery-operated appliances, the tests are carried out with the battery fully charged unless otherwise specified.		N/A						
19.13	The battery shall not rupture or ignite.		N/A						
19.S.101	Battery-operated appliances are supplied with the voltage specified in 11.5. The supply terminals having an indication of polarity are connected to the opposite		N/A						

	polarity, unless such a connection is unlikely to occur due to the construction of the appliance.		
19.S.102	For battery-operated appliances with provision for multiple batteries, one or more of the batteries shall be reversed and the appliance shall be operated, if reversal of batteries is allowed by the construction.		N/A
25	Supply connection and external flexible cords		--
25.5	The flexible leads or flexible cord used to connect an external battery or battery box in battery-operated appliances shall be connected to the appliance by a type X attachment.		N/A
25.13	This requirement is not applicable to the flexible leads or flexible cord connecting external batteries or a battery box with an appliance.		N/A
25.S.101	Battery-operated appliances shall have suitable means for connection of the battery. If the type of battery is marked on the appliance, the means of connection shall be suitable for this type of battery.		N/A
26	Terminals for external conductors		--
26.5	Terminal devices in an appliance for the connection of the flexible leads or flexible cord connecting an external battery or battery box shall be so located or shielded that there is no risk of accidental connection between supply terminals.		N/A
30	Resistance to heat and fire		--
30.2.3.2	Addition: There shall be no battery in the area of the vertical cylinder used for the consequential needle flame test unless the battery is shielded by a barrier that meets the needle flame test of Annex E or that comprises material classified as V-0 or V-1 according to IEC 60695-11-10 provided that the test sample used for the classification was no thicker than the relevant part of the appliance.		N/A



General View



General View



Internal View



Internal View




Internal View




Internal View



Internal View

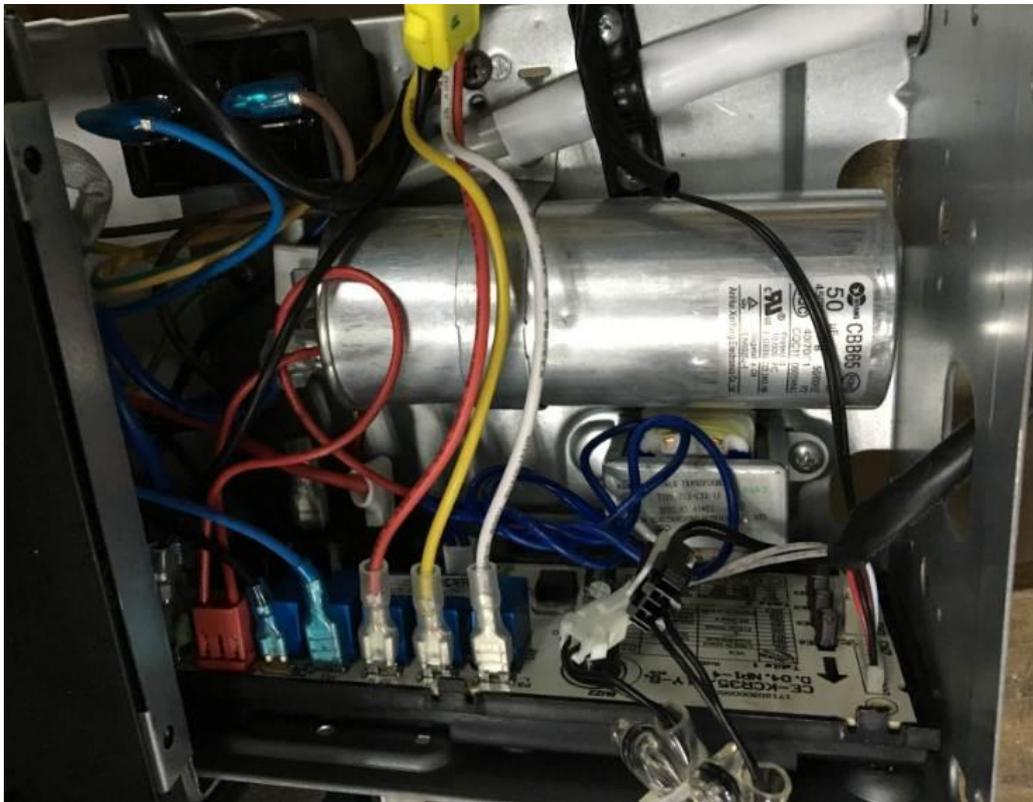

Internal View

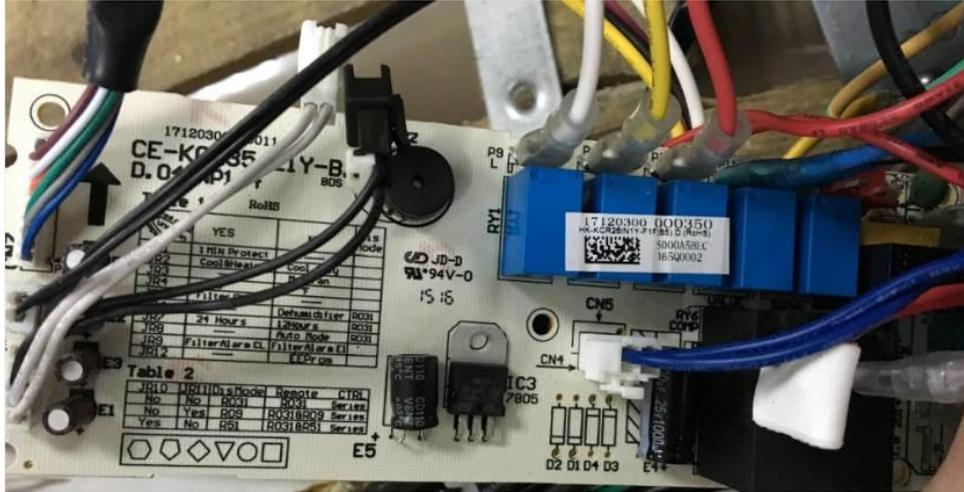

Main PCB