



VENTUS VVS/COMPACT

VOLCANO
WING
WING PRO
2022





01 VTS Group

- 1.1. VTS Group06
- 1.2. 3 pillars of success08

02 Support for designers

- 2.1. ClimaCad Online 4.012
- 2.2. VTS BIM14

03 VENTUS VVS Air Handling Units

- 3.1. General specification18
- 3.2. Technical specification.....26
 - 3.2.1. VVS 021-120 - Recuperator [hex & premium plus].....26
 - 3.2.2. VVS 150-650 - Recuperator [premium plus].....28
 - 3.2.3. VVS 021-120 - Regenerator [rotary heat wheel].....30
 - 3.2.4. VVS 150-650 - Regenerator [rotary heat wheel].....32
 - 3.2.5. VVS 21-120 - Supply & Exhaust.....34
 - 3.2.6. VVS 150-650 - Supply & Exhaust.....36
- 3.2.6. Additional configuration functions - VVS 021-650 - recuperator [hex & premium plus], regenerator [rotary heat wheel], supply & exhaust.....38
- 3.3. Components40
- 3.4. Controls48
 - 3.4.1. Description.....48
 - 3.4.2. Control elements52

04 VENTUS Compact Air Handling Units

- 4.1. General specification60
- 4.2. Technical specification.....66
 - 4.2.1. VVS 005s-030s - Compact Suspended air handling units.....66
 - 4.2.2. VVS 021c-150c - Compact floor-mounted air handling units.....68
- 4.3. Components70
- 4.4. Controls76
 - 4.4.1. Description.....76
 - 4.4.2. Control elements80

05 Coding, symbols & markings



- 5.0. Coding, symbols & markings84

06 VOLCANO & WING units

- 6.1. VOLCANO88
- 6.2. WING90

07 Psychrometric chart (Mollier)

- 7.0. Psychrometric chart [Mollier]93

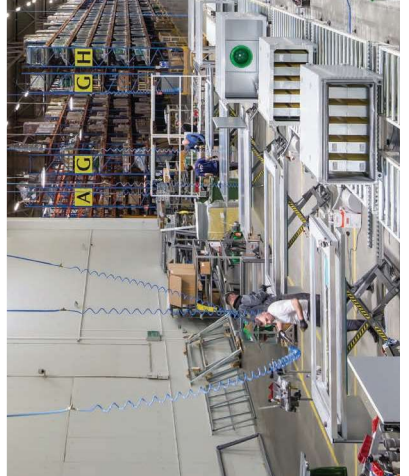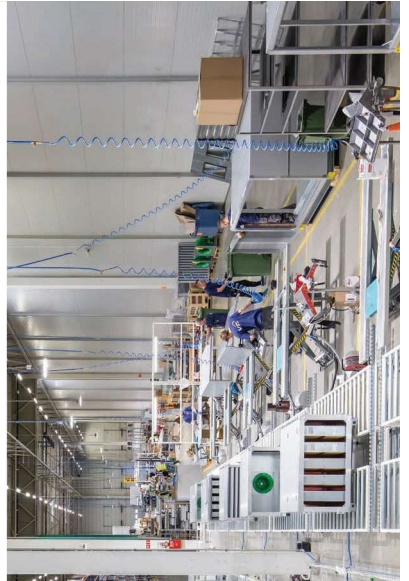


01

VTS Group



VTS GROUP – is a manufacturer of technically advanced HVAC equipment, combining innovative technologies in the field of research&development, production and logistics.

OUR MISSION
AHU#1

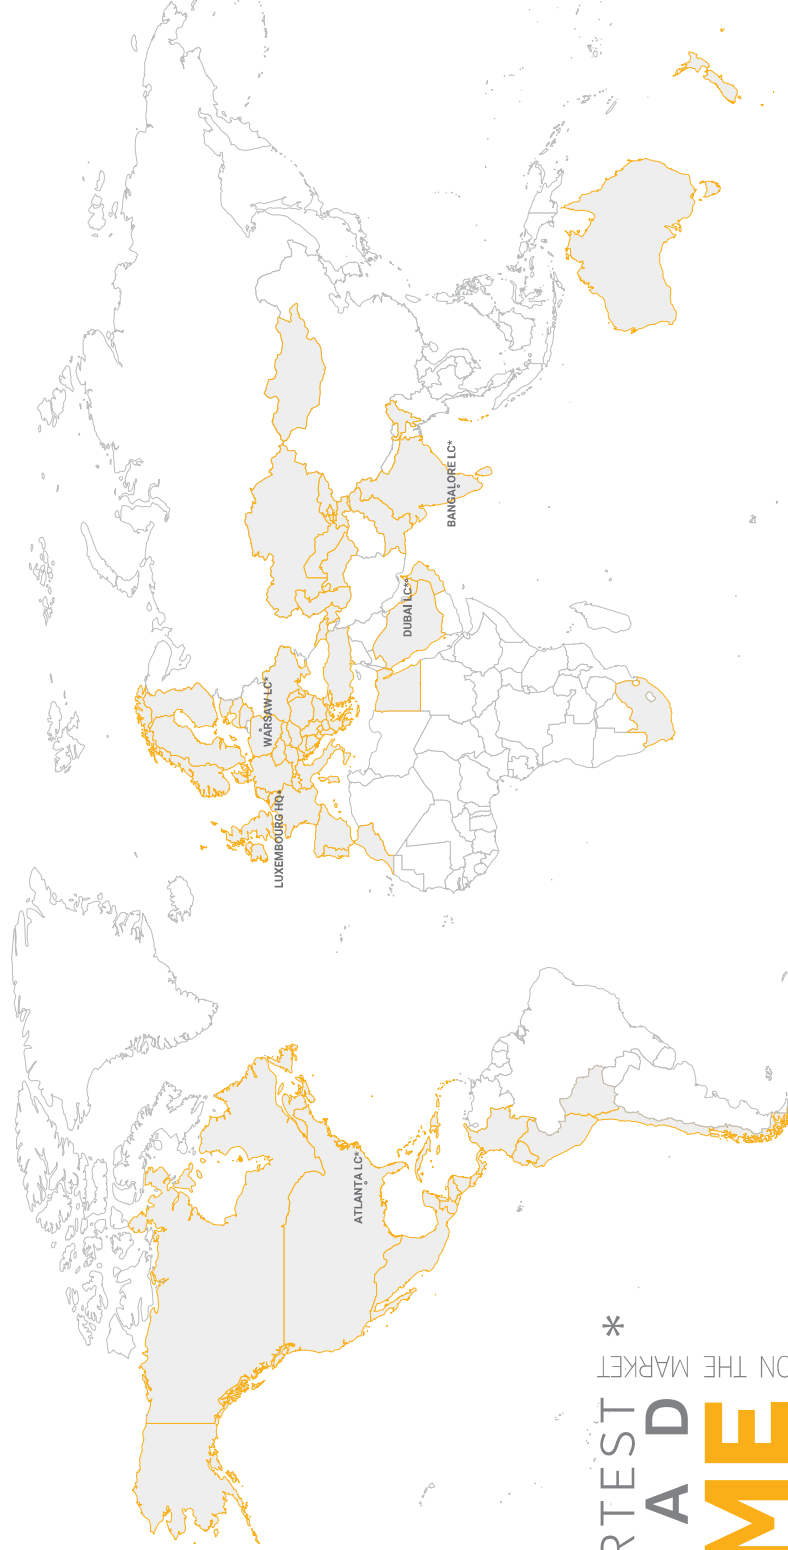

**SHORTEST
LEAD
TIME** *
ON THE MARKET



* Logistics center



VTS Group

3 PILLARS OF SUCCESS

Constantly highest quality of products. Best prices on the market. Shortest lead time. These 3 pillars of marketing policy allows VTS to be always one step head, wherever in the world.

Following the best practices of the branch, VTS has created a network of 4 efficiently running production and logistic centers (**Atlanta, Dubai, Warsaw, Bangalore**), enable to ensure the shortest lead time on the market, wherever in the world.

ON THE MARKET
LEAD TIME



COMPETITIVE
\$ PRICE


150 000
UNITS
SOLD ANNUALLY

BEST
Q QUALITY

UP TO **5**
WARRANTY
FOR EACH
UNIT

Multistage quality control system allows VTS to offer **2 years warranty, extendable even up to 5.**



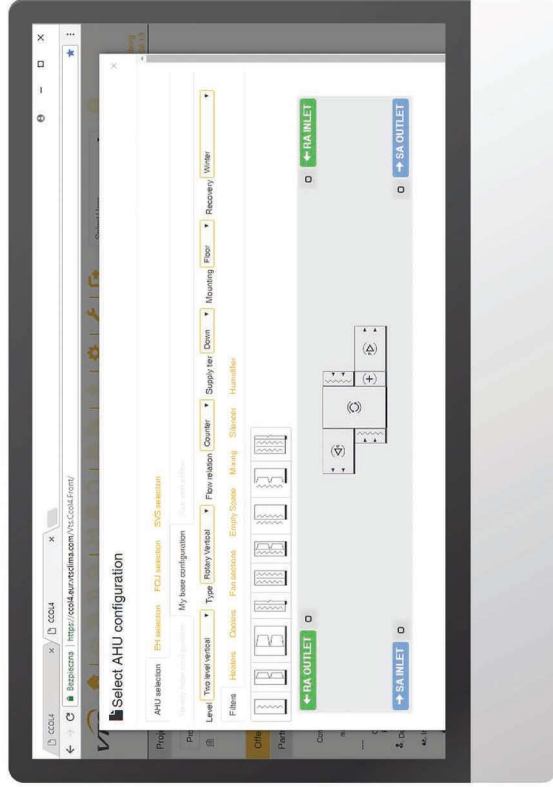

02

Support
for designers

CLIMACAD ONLINE 4.0 [CCOL 4]

Infinite number of configurations

Friendly user interface



Simple and easy selection

Integration with CRM, ERP & WMA systems

Certified by



CCOL4 OPTIMIZED FOR



» any web-browser

» any operating system



» any device

DATA EXPORT TO



CCOL 4.0 utilises latest technologies and software platforms. The tool has been developed in SaaS model (Software as a Service). It's best advantage is, that service is accessible wherever in the world. Any device equipped with web-browser and internet access is all you need to experience the power of our CCOL 4.0.


DESIGN VERSATILITY

- » Infinite units configurations.
- » Detecting of configurations errors.




DYNAMIC AHU LENGTH DEFINITION

- » CCOL4 applies dynamic optimizing of AHU length based on automatic air treatment functions. placements with regard to minimum gaps between them in order to secure their proper performance.



MANAGING OF YOUR DATA BASE

- » Self-creating and development by designer of own projects and AHU selections data base.
- » Sharing of self-made AHU selections with VTS engineers for pricing.

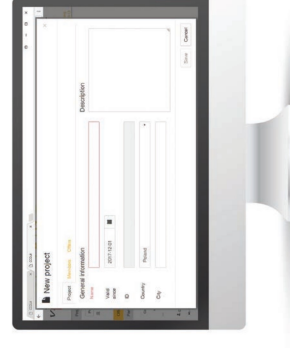


VTS BIM - new approach to digital models of Air Handling Units

VTS has enabled dynamic generating of VENTUS VVS, VENTUS Compact and American VENTUS AVS units digital models as on-line service. This became possible thanks to implementation of new AHU selection tool – the ClimaCAD OnLine 4.0 [CCOL 4.0], equipped with .rfa [Revit®] files generator.



The Autodesk REVIT® families shared by VTS significantly facilitate entire building modelling process done by designing bureaus. At the moment, the generator is an unique tool in entire BIM environment. It enables to generate brand new VENTUS units model on the spot, in any configuration or any parameters.


3 steps to generate the model:



1 Login to CCOL 4.0


You can login using our web-site:

www.ccol4.com



2 AHU configuration and parameters specifying


Intuitive unit configurator enables to select a unit, perfectly fitting to your design assumptions.



3 Selection export to .rfa file

In order to generate .rfa model, all you need to do is to enter personal information (including e-mail address) of a person to whom the model is to be sent. The system will automatically send the link to the site from where model can be downloaded. Entire process take no longer than 15 minutes.



As a result the client is given:



Digital model of the air handling unit with fully parametrized connectors:

- » Air,
- » Hydraulic,
- » Sanitary,
- » Electric,

and also a set of complete technical and dimensioning information, including clearly marked **maintenance** and **service zone** of the unit.



VTS enables also a library of static families for: WING air curtains and VOLCANO air heaters.

The models includes:

- » **parametrized electric and hydraulic connectors,**
- » **both vertical and horizontal mounting options,**
- » **presentation of units effective air range,**
- » **parametrized angle of heater's to the horizontal plane.**

VTS **BIM** -air handling units perfectly fitted for designer's needs.



VTS supports generating of air handling units models in LOD 400 (Level Of Development) standard.

LOD
400
as standard

The VENTUS BIM families include maintenance and service zones of the units as standard.

These zones reserve minimum space to secure proper maintenance and repair conditions of the unit, and allow to avoid any collisions with remaining building elements or installations.

Service clearance
repair & maintenance
as standard.

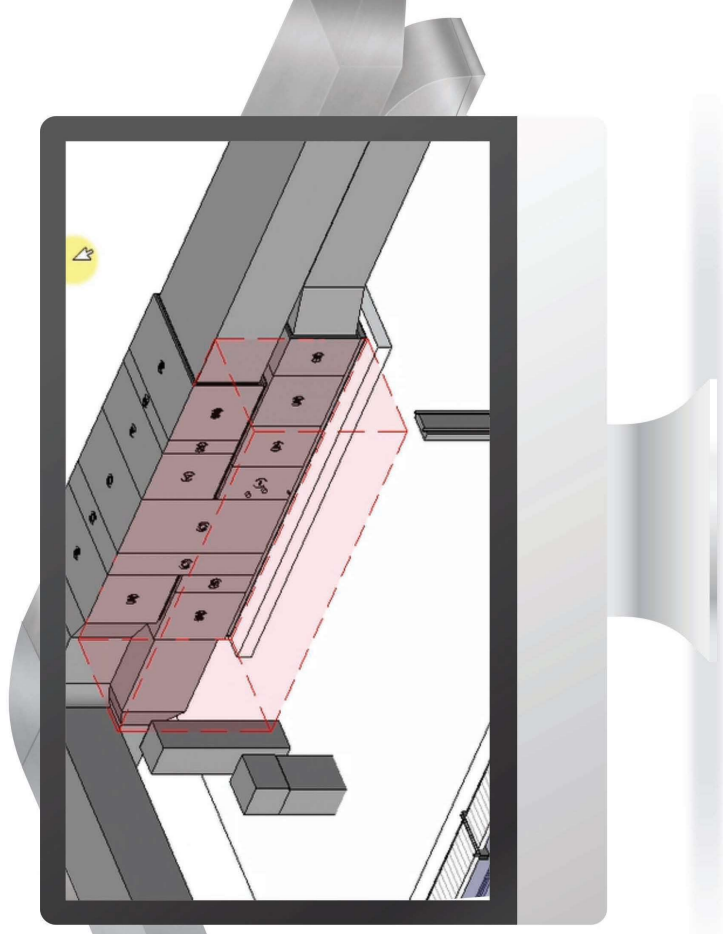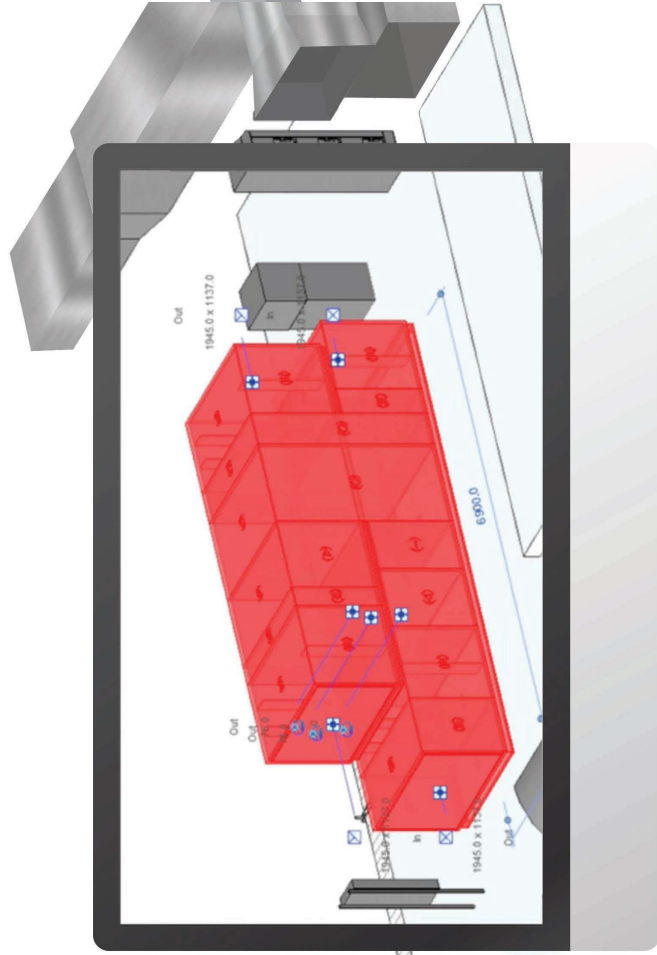



03

VENTUS VVS

ventus
VVS



Airflow
from **1 100** m³/h
from **100 000** m³/h



Up to **92%**
of energy recovery
efficiency



14
sizes



**DURABLE
AND TIGHT
STRUCTURE**



**RELIABLE
COMPONENTS**




**SMART
CONTROLS**




**USER
SAFETY**


STRUCTURE



STEEL SKIN COATED WITH ALUZINC AZ 150

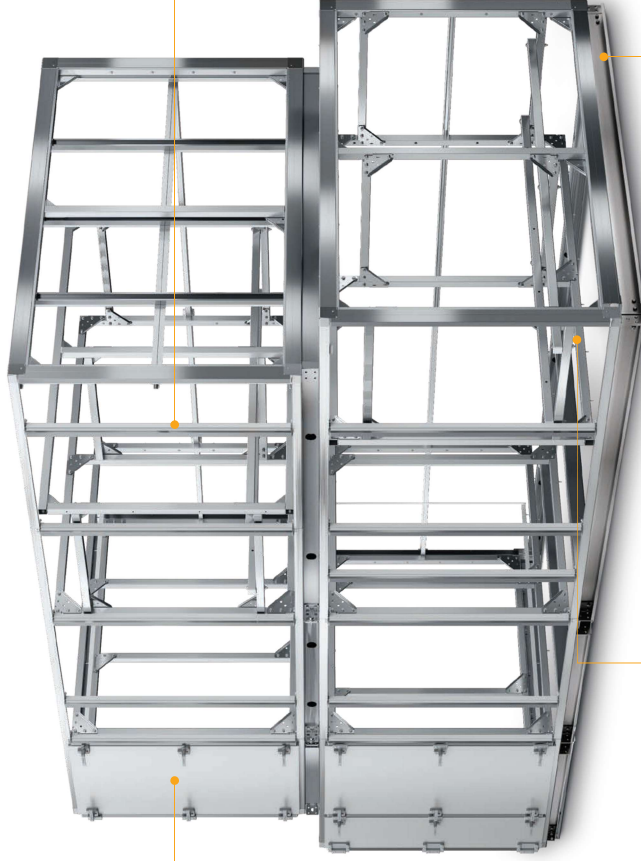

CORROSION RESISTANCE

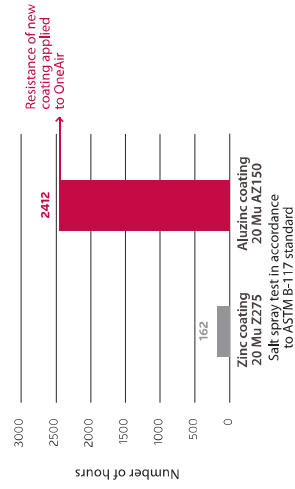


CASING SKIN

- » Rigid, durable structure of the casing.
- » Low absorption of heat radiation and UV.
- » High resistance to weather conditions.

FAN SECTION CAGE

- » Improved longitudinal rigidity of the structure.
- » Facilitated sections joining.



PROFIL V
VWS 021-180



PROFIL C
VWS 230-650

STEEL BASE FRAME AS STANDARD FOR ANY TYPE OF UNITS



FOUNDATION

- » Transport facilitation.
- » High resistance of the frame to deflection.

STRUCTURAL POSTS

- » Broken thermal bridges as standard.
- » High resistance to weather conditions and UV radiation.

TIGHTNESS



**THERMAL
BREAK**

**LABIRYNTH
TIGHTENING**



**ADDITIONAL
POST SEALING**

**ADDITIONAL
SEALING
BLADE**

CANOPY

- » The canopy is made of 0,5 mm steel sheet, double side coated with 185 um of zinc (DX51D AZ185).
- » Canopy is assembled of modules equipped with self-latching grooves securing perfect tightness of the joints. Modular structure of the canopy ensures its easy and safe assembly.

ERGONOMIC INSPECTION PANEL LOCK


- » Highly aesthetic and ergonomic handles securing perfect tightness of inspection panels.

ALUMINIUM STRUCTURAL POSTS WITH ADDITIONAL SEALING BLADE AND THERMAL BREAK

- » Broken thermal bridge as standard – eliminates humidity condensation on units structural elements.
- » Blade along the inspection window ensures labyrinth tightening between panel and AHU body – currently the most effective solution on the market, mainly applied to laboratory equipment.
- » Symmetrical groove in the vertical post's mounting feet secures its 100% tightness with the AHU casing structure.

WVS 021-120 – RECUPERATOR (HEX & PREMIUM PLUS)

DIMENSIONS - WVS 021-120 – RECUPERATOR (HEX & PREMIUM PLUS)

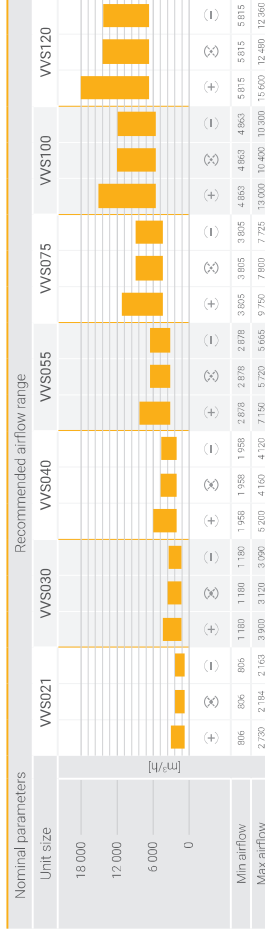

Selected configurations Dimension


Configuration	WVS021	WVS030	WVS040	WVS055	WVS075	WVS100	WVS120
L2	2328	3294	3294	3294	3294	4026	4026
L1	2362	2928	2928	2928	3294	4026	4026
K	366	366	366	366	366	0	0
L2	2328	3294	3294	3294	3294	4026	4026
L1	2462	2928	2928	2928	3294	4026	4026
K	366	366	366	366	366	0	0
L1	2328	3294	3294	3294	3294	4026	4026
L2	2328	3294	3294	3294	3294	4026	4026
L1	2328	3294	3294	3294	3294	4026	4392
K	0	0	0	0	0	0	0
L2	2328	3294	3294	3294	3294	4026	4392
L1	2328	3294	3294	3294	3294	4026	4026
K	0	0	0	0	0	0	0
L2	2328	3294	3294	3294	3294	4026	4392
L1	2328	3294	3294	3294	3294	4026	4026
K	0	0	0	0	0	0	0
L2	3294	3660	3660	3660	4026	4758	4758
L1	3294	3660	3660	3660	4026	4026	4026
K	0	0	0	0	0	0	0
L2	3294	3660	3660	3660	4026	4758	4758
L1	3294	3660	3660	3660	4026	4758	4758
K	0	0	0	0	0	0	0
L2	3294	3660	3660	3660	4026	4758	4758

Length of selected configurations

Configuration	WVS021	WVS030	WVS040	WVS055	WVS075	WVS100	WVS120
L2	2328	3294	3294	3294	3294	4026	4026
L1	2362	2928	2928	2928	3294	4026	4026
K	366	366	366	366	366	0	0
L2	2328	3294	3294	3294	3294	4026	4026
L1	2462	2928	2928	2928	3294	4026	4026
K	366	366	366	366	366	0	0
L1	2328	3294	3294	3294	3294	4026	4026
L2	2328	3294	3294	3294	3294	4026	4392
L1	2328	3294	3294	3294	3294	4026	4026
K	0	0	0	0	0	0	0
L2	2328	3294	3294	3294	3294	4026	4392
L1	2328	3294	3294	3294	3294	4026	4026
K	0	0	0	0	0	0	0
L2	3294	3660	3660	3660	4026	4758	4758
L1	3294	3660	3660	3660	4026	4026	4026
K	0	0	0	0	0	0	0
L2	3294	3660	3660	3660	4026	4758	4758
L1	3294	3660	3660	3660	4026	4758	4758
K	0	0	0	0	0	0	0
L2	3294	3660	3660	3660	4026	4758	4758



Entire range of configuration
in ClimacAD OnLine 4 selection tool.
www.ccol4.com

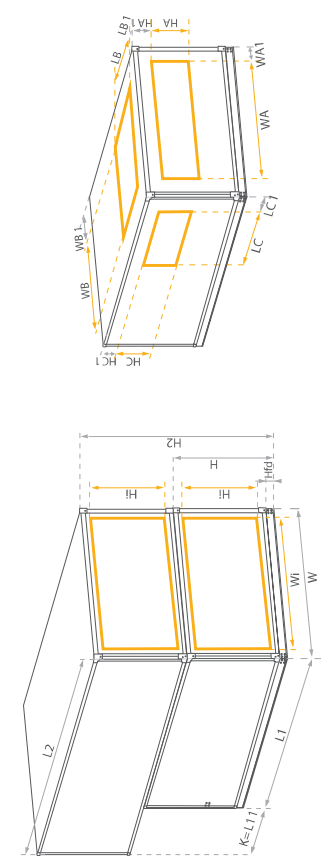

Full-face horizontal outlet END (FF)

Size	WA	HA	WA1	HA1
WVS021	821	313	70	67,5
WVS030	821	440	70	70
WVS040	1028	440	70	70
WVS055	1199	575	70	70
WVS075	1340	695	70	70
WVS100	1520	795	70	70
WVS120	1751	832	70	70

Small horizontal inlet-outlet END (FS)

Size	WA	HA	WA1	HA1
WVS021	500	220	228	112
WVS030	500	220	228	178
WVS040	660	250	232	163
WVS055	821	440	257	135
WVS075	1028	440	224	195
WVS100	1199	575	228	200
WVS120	1199	575	344	196

Vertical inlet-outlet END (US)

Size	WB	LB	WB1	LB1
WVS021	500	220	228	200
WVS030	500	220	228	200
WVS040	660	250	252	200
WVS055	821	440	257	200
WVS075	1028	440	224	200
WVS100	1199	575	228	125
WVS120	1199	575	344	125

Vertical outlet END (US)

Size	WB	LB	WB1	LB1
WVS021	660	250	152	212
WVS030	613	380	173	127
WVS040	821	440	175	212
WVS055	1028	440	157	212
WVS075	1199	575	142	212
WVS100	1340	695	162	212
WVS120	1520	795	187	127

Side inlet-outlet END (BS)

Size	HC	LC	HC1	LC1
WVS021	213	380	115	165
WVS030	313	380	131	165
WVS040	313	380	131	165
WVS055	413	380	149	165
WVS075	413	380	209	165
WVS100	613	380	159	165
WVS120	613	380	177	165

Side outlet END (BS)


Size	HC	LC	HC1	LC1
WVS021	213	380	114	202
WVS030	313	380	180	202
WVS040	313	380	165	202
WVS055	413	380	137	202
WVS075	413	380	197	202
WVS100	613	380	158	127
WVS120	613	380	198	127

VVS 150-650 - RECUPERATOR (PREMIUM PLUS)


DIMENSIONS - VVS 150-650 - RECUPERATOR (PREMIUM PLUS)

Nominal parameters		Recommended airflow range							
Unit size		VVS150	VVS180	VVS230	VVS300	VVS400	VVS500	VVS650	
Min airflow	7167 / 7167 / 8460 / 8460 / 10398 / 10398 / 13491 / 13491	90	120	120	120	120	120	120	120
Max airflow	19500 / 15000 / 15450 / 20400 / 20400 / 26300 / 26300 / 39000 / 39000 / 41500 / 41500 / 57500 / 56500 / 84500 / 84500	0	80	80	80	80	80	80	80
P _{RD}									
H _{FD}									
H	1163	1397	1696	1929	2406	2406	2406	2406	2406
W	2085	2085	2493	2685	3085	3585	3697	3697	3697
H ₁	993	1197	1496	1729	2206	2206	2206	2206	2206
W ₁	2005	2005	2413	2505	3005	3505	3617	3617	3617
H ₂	2326	2754	2754	3352	3818	3818	4772	4772	4772
I	40	40	40	40	40	40	40	40	40

Selected configurations: Dimension		Length of selected configurations					
L2	4392	4392	4392	4392	4392	4392	4392
L1	4026	4026	4026	4026	4026	4026	4026
K	366	366	366	366	366	366	366
FFB/P/WP/Led	4392	4392	4392	4392	4392	4392	4392
FFB/M/V/WP/Led	4392	4392	4392	4392	4392	4392	4392
FFB/M/V/WP/Led	4392	4392	4392	4392	4392	4392	4392
L2	4392	4392	4392	4392	4392	4392	4392
L1	4026	4026	4026	4026	4026	4026	4026
K	366	366	366	366	366	366	366
FFB/M/V/WP/Led	4392	4392	4392	4392	4392	4392	4392
FFB/M/V/WP/Led	4392	4392	4392	4392	4392	4392	4392
L2	4392	4392	4392	4392	4392	4392	4392
L1	4026	4026	4026	4026	4026	4026	4026
K	366	366	366	366	366	366	366
FFB/M/V/WP/Led	4392	4392	4392	4392	4392	4392	4392
FFB/M/V/WP/Led	4392	4392	4392	4392	4392	4392	4392
L2	4392	4392	4392	4392	4392	4392	4392
L1	4026	4026	4026	4026	4026	4026	4026
K	366	366	366	366	366	366	366
FFB/M/V/WP/Led	4392	4392	4392	4392	4392	4392	4392
FFB/M/V/WP/Led	4392	4392	4392	4392	4392	4392	4392
L2	4392	4392	4392	4392	4392	4392	4392
L1	4026	4026	4026	4026	4026	4026	4026
K	366	366	366	366	366	366	366
FFB/M/V/WP/Led	4392	4392	4392	4392	4392	4392	4392
FFB/M/V/WP/Led	4392	4392	4392	4392	4392	4392	4392



Entire range of configuration
in ClimaCAD Online 4 selection tool.
www.ccol4.com

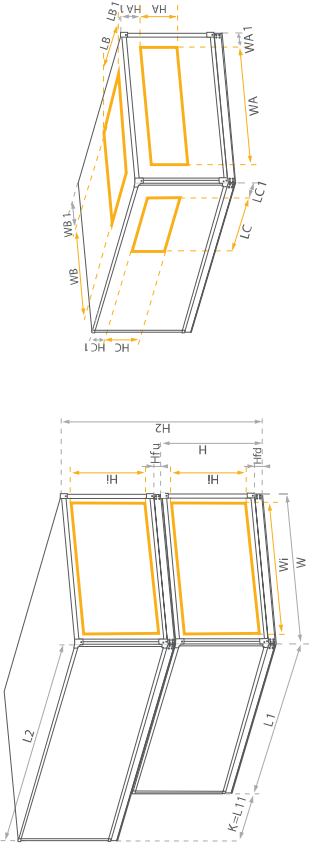

Full-face horizontal outlet
END (FF)

Size	WA	HA	WA1	HA1
VVS150	1 945	933	70	70
VVS180	1 945	1 137	70	70
VVS230	2 353	1 137	70	70
VVS300	2 445	1 436	70	70
VVS400	2 945	1 669	70	70
VVS500	3 445	1 669	70	70
VVS650	3 557	2 146	70	70

Small horizontal inlet-outlet
END (FS)

Size	WA	HA	WA1	HA1
VVS150	1 520	795	280	137
VVS180	1 520	713	280	239
VVS230	1 945	813	272	200
VVS300	1 945	813	318	319
VVS400	2 650	813	215	436
VVS500	3 150	813	215	436
VVS650	3 250	813	220	674

Vertical inlet-outlet
END (US)

Size	WB	LB	WB1	LB1
VVS150	1 520	795	280	200
VVS180	1 520	713	280	239
VVS230	1 945	813	272	151
VVS300	1 945	813	318	151
VVS400	2 650	813	215	151
VVS500	3 150	813	215	151
VVS650	3 250	813	220	151

Vertical outlet
END (US)

Size	WB	LB	WB1	LB1
VVS150	1 520	795	280	127
VVS180	1 520	713	293	127
VVS230	1 945	813	284	127
VVS300	1 945	813	330	127
VVS400	2 650	813	228	127
VVS500	3 150	813	228	212
VVS650	3 250	813	234	212

Side inlet-outlet
END (BS)

Size	HC	LC	HC1	LC1
VVS150	713	740	178	165
VVS180	913	740	180	165
VVS230	913	740	180	165
VVS300	1 213	740	179	165
VVS400	1 513	740	146	165
VVS500	1 513	740	146	165
VVS650	1 913	740	184	165


Side outlet
END (BS)

Size	HC	LC	HC1	LC1
VVS150	713	740	199	202
VVS180	913	740	241	202
VVS230	913	740	142	127
VVS300	1 213	740	321	127
VVS400	1 513	740	438	127
VVS500	1 513	740	438	127
VVS650	1 913	740	676	127

VVS 021-120 - ROTARY HEAT WHEEL

DIMENSIONS - VVS 021-120 - ROTARY HEAT WHEEL

Nominal parameters	Recommended airflow range																		
	VVS021	VVS030	VVS040	VVS055	VVS075	VVS100	VVS120												
Unit size	1800	1830	1830	1830	1830	1830	1830	1830	1830	1830	1830	1830							
Min airflow	806	806	806	806	806	806	806	806	806	806	806	806							
Max airflow	2720	2415	2163	3000	3450	3990	5200	4400	4170	7150	6225	5665	9750	10000	11620	10300	16600	130800	12360
Hg	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
H ₁₀	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
H	538	538	670	670	805	805	1025	1025	1025	925	925	1160	1160	1160	1160	1160	1160	1160	1160
W	961	961	1168	1168	1339	1339	1480	1480	1480	1480	1660	1660	1660	1660	1660	1660	1660	1660	1660
H ₁	368	368	500	500	635	635	755	755	755	855	855	892	892	892	892	892	892	892	892
W ₁	881	881	1088	1088	1259	1259	1400	1400	1400	1580	1580	1811	1811	1811	1811	1811	1811	1811	1811
H ₂	986	986	1250	1250	1520	1520	1760	1760	1760	1960	1960	2034	2034	2034	2034	2034	2034	2034	2034
I	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
Selected configurations. Dimension											Length of selected configurations								
L2	1830	1830	1830	1830	1830	1830	1830	1830	1830	1830	1830	1830	1830	1830	1830	1830	1830	1830	1830
L1	1830	1830	1830	1830	1830	1830	1830	1830	1830	1830	1830	1830	1830	1830	1830	1830	1830	1830	1830
K	366	366	366	366	366	366	366	366	366	366	366	366	366	366	366	366	366	366	366
FM/FV/R/L	366	366	366	366	366	366	366	366	366	366	366	366	366	366	366	366	366	366	366
FM/FV/R/L-C2	2562	2562	2562	2562	2562	2562	2562	2562	2562	2562	2562	2562	2562	2562	2562	2562	2562	2562	2562
L1	2562	2562	2562	2562	2562	2562	2562	2562	2562	2562	2562	2562	2562	2562	2562	2562	2562	2562	2562
K	366	366	366	366	366	366	366	366	366	366	366	366	366	366	366	366	366	366	366
FM/FV/R/L-C1	2562	2562	2562	2562	2562	2562	2562	2562	2562	2562	2562	2562	2562	2562	2562	2562	2562	2562	2562
L1	2562	2562	2562	2562	2562	2562	2562	2562	2562	2562	2562	2562	2562	2562	2562	2562	2562	2562	2562
L2	1830	1830	1830	1830	1830	1830	1830	1830	1830	1830	1830	1830	1830	1830	1830	1830	1830	1830	1830
L1	1830	1830	1830	1830	1830	1830	1830	1830	1830	1830	1830	1830	1830	1830	1830	1830	1830	1830	1830
K	366	366	366	366	366	366	366	366	366	366	366	366	366	366	366	366	366	366	366
FM/FV/R/L-C4	2562	2562	2562	2562	2562	2562	2562	2562	2562	2562	2562	2562	2562	2562	2562	2562	2562	2562	2562
L1	2562	2562	2562	2562	2562	2562	2562	2562	2562	2562	2562	2562	2562	2562	2562	2562	2562	2562	2562
L2	2928	2928	2928	2928	2928	2928	2928	2928	2928	2928	2928	2928	2928	2928	2928	2928	2928	2928	2928
L1	2928	2928	2928	2928	2928	2928	2928	2928	2928	2928	2928	2928	2928	2928	2928	2928	2928	2928	2928
K	366	366	366	366	366	366	366	366	366	366	366	366	366	366	366	366	366	366	366
FM/FV/R/L-C3	2928	2928	2928	2928	2928	2928	2928	2928	2928	2928	2928	2928	2928	2928	2928	2928	2928	2928	2928
L1	2928	2928	2928	2928	2928	2928	2928	2928	2928	2928	2928	2928	2928	2928	2928	2928	2928	2928	2928
L2	2196	2196	2196	2196	2196	2196	2196	2196	2196	2196	2196	2196	2196	2196	2196	2196	2196	2196	2196
L1	2196	2196	2196	2196	2196	2196	2196	2196	2196	2196	2196	2196	2196	2196	2196	2196	2196	2196	2196
K	366	366	366	366	366	366	366	366	366	366	366	366	366	366	366	366	366	366	366
FM/OV/R/M/L-C1	2928	2928	2928	2928	2928	2928	2928	2928	2928	2928	2928	2928	2928	2928	2928	2928	2928	2928	2928
L1	2928	2928	2928	2928	2928	2928	2928	2928	2928	2928	2928	2928	2928	2928	2928	2928	2928	2928	2928

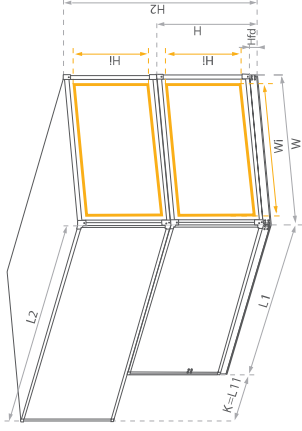

Small horizontal inlet-outlet END (FS)	Small horizontal inlet-outlet END (FS)
Size	Size
VVS021	VVS021
VVS030	VVS030
VVS040	VVS040
VVS055	VVS055
VVS075	VVS075
VVS100	VVS100
VVS120	VVS120

Vertical inlet-outlet END (US)	Vertical inlet-outlet END (US)
Size	Size
VVS021	VVS021
VVS030	VVS030
VVS040	VVS040
VVS055	VVS055
VVS075	VVS075
VVS100	VVS100
VVS120	VVS120

Small horizontal inlet-outlet END (FS)	Small horizontal inlet-outlet END (FS)
Size	Size
VVS021	VVS021
VVS030	VVS030
VVS040	VVS040
VVS055	VVS055
VVS075	VVS075
VVS100	VVS100
VVS120	VVS120

Vertical outlet END (US)	Vertical outlet END (US)
Size	Size
VVS021	VVS021
VVS030	VVS030
VVS040	VVS040
VVS055	VVS055
VVS075	VVS075
VVS100	VVS100
VVS120	VVS120

Side inlet-outlet END (BS)	Side inlet-outlet END (BS)
Size	Size
VVS021	VVS021
VVS030	VVS030
VVS040	VVS040
VVS055	VVS055
VVS075	VVS075
VVS100	VVS100
VVS120	VVS120

Side outlet END (BS)	Side outlet END (BS)
Size	Size
VVS021	VVS021
VVS030	VVS030
VVS040	VVS040
VVS055	VVS055
VVS075	VVS075
VVS100	VVS100
VVS120	VVS120





Entire range of configuration
in ClimaCAD OnLine 4 selection tool.
www.ccol4.com

VVS 150-650- ROTARY HEAT WHEEL

DIMENSIONS - VVS 150-650 - ROTARY HEAT WHEEL

Nominal parameters	Recommended airflow range									
	VVS150	VVS180	VVS230	VVS300	VVS400	VVS500	VVS5400	VVS650		
Unit size	90	120	120	120	120	120	120	120		
Min airflow	7167	8640	10398	13491	18704	21817	28725	28725		
Max airflow	19500	23400	28300	36000	43200	50400	64800	64800		
H _g	90	120	120	120	120	120	120	120		
H _{fu}	80	80	80	80	80	80	80	80		
H	1163	1397	1397	1696	1929	1929	2406	2406		
W	2085	2085	2493	2585	3085	3585	3697	3697		
H ₁	993	1197	1197	1496	1729	1729	2206	2206		
W ₁	2005	2005	2413	2505	3005	3505	3617	3617		
H ₂	2236	2754	2754	3352	3818	3818	4772	4772		
I	40	40	40	40	40	40	40	40		

Selected configurations: Dimension	Length of selected configurations									
	VVS150	VVS180	VVS230	VVS300	VVS400	VVS500	VVS5400	VVS650		
L2	2562	2562	2562	2928	2928	2928	2928	2928		
L1	2562	2562	2562	2928	2928	2928	2928	2928		
K	1098	1098	1098	1464	1464	1464	1464	1464		
FMMV/FMRLC2	2562	2562	2562	2928	2928	2928	2928	2928		
L2	3660	3660	3660	4026	4026	4026	4026	4026		
L1	3660	3660	3660	4026	4026	4026	4026	4026		
K	0	0	0	0	0	0	0	0		
FMMV/FMRLC1	3660	3660	3660	4026	4026	4026	4026	4026		
L2	3660	3660	3660	4026	4026	4026	4026	4026		
L1	2928	2928	2928	2928	2928	2928	2928	2928		
K	1098	1098	1098	1464	1464	1464	1464	1464		
FMMV/FMRLC1	2928	2928	2928	3294	3294	3294	3294	3294		
L2	3660	3660	3660	4026	4026	4026	4026	4026		
L1	3660	3660	3660	4026	4026	4026	4026	4026		
K	0	0	0	0	0	0	0	0		
FMMV/FMRLC2	4026	4026	4026	4392	4392	4392	4392	4392		
L2	4026	4026	4026	4392	4392	4392	4392	4392		
L1	2562	2562	2562	2928	2928	2928	2928	2928		
K	1098	1098	1098	1464	1464	1464	1464	1464		
FMMV/FMRLC2	2562	2562	2562	2928	2928	2928	2928	2928		
L2	3660	3660	3660	4026	4026	4026	4026	4026		
L1	3660	3660	3660	4026	4026	4026	4026	4026		
K	0	0	0	0	0	0	0	0		
FMMV/FMRLC1	4026	4026	4026	4392	4392	4392	4392	4392		

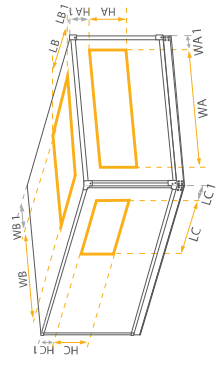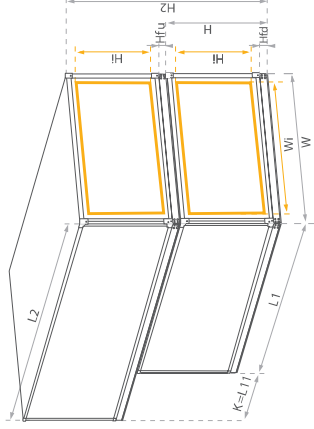

Full-face horizontal outlet END (FF)	WA	HA	WA1	HA1
VVS150	1945	933	70	70
VVS180	1945	1137	70	70
VVS230	2353	1137	70	70
VVS300	2445	1436	70	70
VVS400	2945	1669	70	70
VVS500	3445	1669	70	70
VVS650	3557	2146	70	70

Small horizontal inlet-outlet END (FS)	WA	HA	WA1	HA1
VVS150	1520	795	280	137
VVS180	1520	713	280	239
VVS230	1945	813	272	200
VVS300	1945	813	318	319
VVS400	2650	813	215	436
VVS500	3150	813	215	436
VVS650	3250	813	220	674

Vertical inlet-outlet END (US)	WB	LB	WB1	LB1
VVS150	1520	795	280	200
VVS180	1520	713	280	239
VVS230	1945	813	272	151
VVS300	1945	813	318	151
VVS400	2650	813	215	151
VVS500	3150	813	215	151
VVS650	3250	813	220	151

Vertical outlet END (US)	WB	LB	WB1	LB1
VVS150	1520	795	280	127
VVS180	1520	713	293	127
VVS230	1945	813	284	127
VVS300	1945	813	330	127
VVS400	2650	813	228	127
VVS500	3150	813	228	212
VVS650	3250	813	234	212

Side inlet-outlet END (BS)	HC	LC	HC1	LC1
VVS150	713	740	178	165
VVS180	913	740	180	165
VVS230	913	740	180	165
VVS300	1213	740	179	165
VVS400	1513	740	146	165
VVS500	1513	740	146	165
VVS650	1913	740	184	165


Side outlet END (BS)	HC	LC	HC1	LC1
VVS150	713	740	139	202
VVS180	913	740	241	202
VVS230	913	740	142	127
VVS300	1213	740	321	127
VVS400	1513	740	438	127
VVS500	1513	740	438	127
VVS650	1913	740	676	127





Entire range of configuration
in ClimaCAD OnLine 4 selection tool.
www.ccol4.com



VVS 021-120 - SUPPLY & EXHAUST

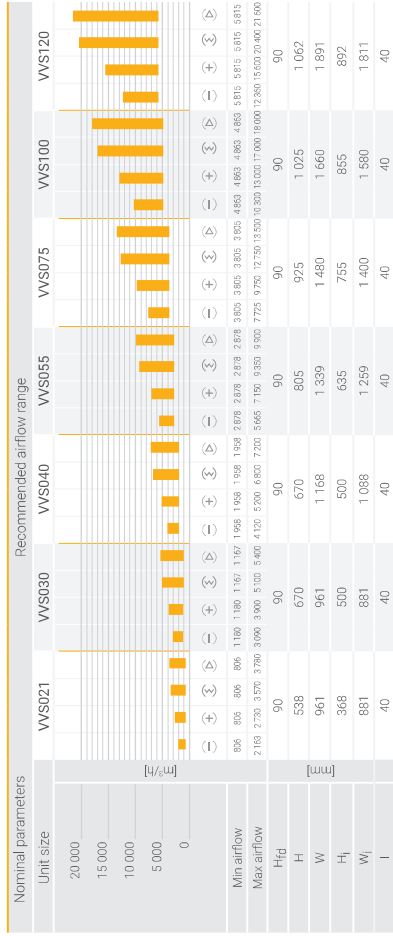

DIMENSIONS - VVS 0 21-120 - SUPPLY & EXHAUST

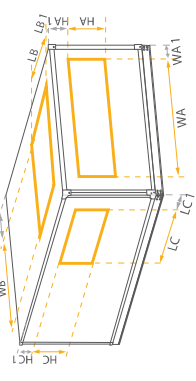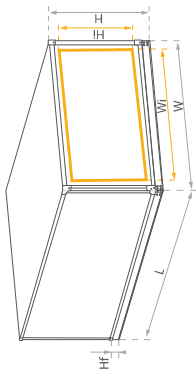

Full-face horizontal outlet		Small horizontal inlet-outlet		
END (FF)	END (FS)	END (FF)	END (FS)	
Size	WA	HA	WA1	HA1
VVS021	821	313	70	67,5
VVS030	821	440	70	70
VVS040	1028	440	70	70
VVS055	1199	575	70	70
VVS075	1340	695	70	70
VVS100	1520	795	70	70
VVS120	1751	832	70	70


Vertical inlet-outlet		Small horizontal inlet-outlet		
END (US)	END (US)	END (FF)	END (FS)	
Size	WB	LB	WB1	LB1
VVS021	500	220	228	112
VVS030	500	220	228	178
VVS040	660	250	252	163
VVS055	821	257	257	135
VVS075	1028	274	274	195
VVS100	1199	288	288	200
VVS120	1340	300	300	196

Vertical inlet-outlet		Side inlet-outlet		
END (US)	END (US)	END (BS)	END (BS)	
Size	WB	LB	WB1	LB1
VVS021	500	220	228	112
VVS030	500	220	228	178
VVS040	660	250	252	163
VVS055	821	257	257	135
VVS075	1028	274	274	195
VVS100	1199	288	288	200
VVS120	1340	300	300	196

Vertical outlet		Side outlet		
END (US)	END (US)	END (BS)	END (BS)	
Size	WB	LB	WB1	LB1
VVS021	660	250	152	212
VVS030	613	380	173	127
VVS040	821	440	175	127
VVS055	1028	440	157	212
VVS075	1199	575	142	212
VVS100	1340	695	162	212
VVS120	1520	795	187	127

Vertical inlet-outlet		Side inlet-outlet		
END (US)	END (US)	END (BS)	END (BS)	
Size	WB	LB	WB1	LB1
VVS021	500	220	228	112
VVS030	500	220	228	178
VVS040	660	250	252	163
VVS055	821	257	257	135
VVS075	1028	274	274	195
VVS100	1199	288	288	200
VVS120	1340	300	300	196


Vertical outlet		Side outlet		
END (US)	END (US)	END (BS)	END (BS)	
Size	WB	LB	WB1	LB1
VVS021	660	250	152	212
VVS030	613	380	173	127
VVS040	821	440	175	127
VVS055	1028	440	157	212
VVS075	1199	575	142	212
VVS100	1340	695	162	212
VVS120	1520	795	187	127

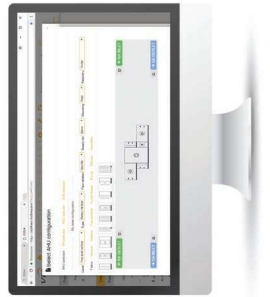

Entire range of configuration
in ClimaCAD OnLine 4 selection tool.
www.ccol4.com

VVS 150-650 - SUPPLY & EXHAUST


DIMENSIONS - VVS 150-650 - SUPPLY & EXHAUST

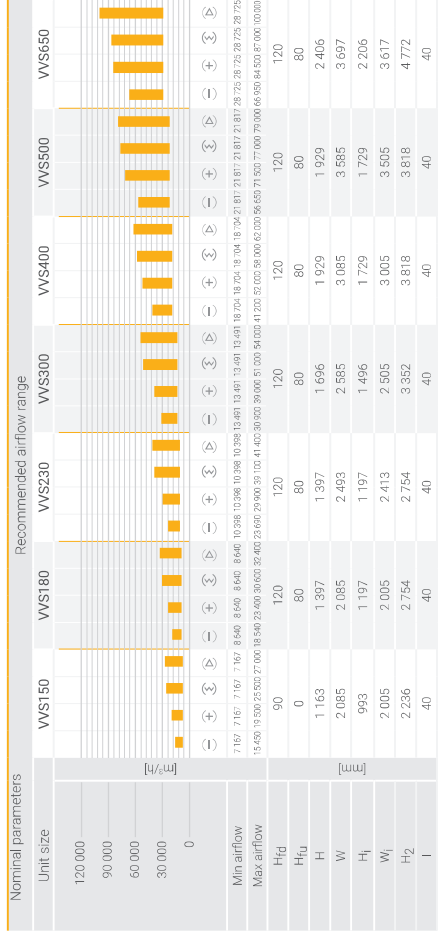

Selected configurations: Dimension	Length of selected configurations						
	Lt	Lt	Lt	Lt	Lt	Lt	Lt
V	1 464	1 464	1 830	1 830	1 830	1 830	1 830
FV	1 830	1 830	2 196	2 196	2 196	2 196	2 196
FVH	2 196	2 196	2 562	2 562	2 562	2 562	2 562
FCV	2 196	2 196	2 562	2 562	2 562	2 562	2 562
FCVH	2 562	2 562	2 928	2 928	2 928	2 928	2 928
FCVH	2 562	2 562	2 928	2 928	2 928	2 928	2 928
FCVH	2 196	2 196	2 562	2 562	2 562	2 562	2 562
FCVH	2 928	2 928	2 928	3 294	3 294	3 294	3 294



Entire range of configuration
in ClimaCAD OnLine 4 selection tool.
www.ccol4.com

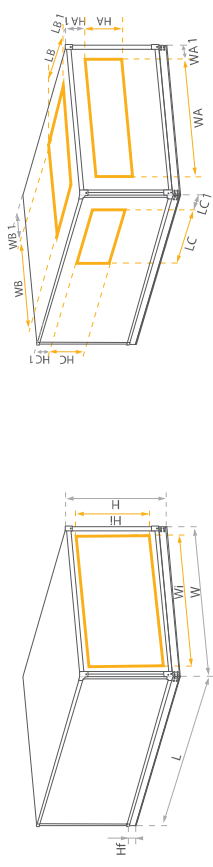

Full-face horizontal outlet END (FF)					
Size	WA	HA	WA1	HA1	
VVS021	821	313	70	67,5	
VVS030	821	440	70	70	
VVS040	1 028	440	70	70	
VVS055	1 199	575	70	70	
VVS075	1 340	695	70	70	
VVS100	1 520	795	70	70	
VVS120	1 751	832	70	70	

Small horizontal inlet-outlet END (FS)					
Size	WA	HA	WA1	HA1	
VVS150	1520	795	280	137	
VVS180	1520	713	280	239	
VVS230	1945	813	272	200	
VVS300	1945	813	318	319	
VVS400	2650	813	215	436	
VVS500	3150	813	215	436	
VVS650	3250	813	220	674	

Vertical inlet-outlet END (US)					
Size	WB	LB	WB1	LB1	
VVS150	1520	795	280	200	
VVS180	1520	713	280	239	
VVS230	1945	813	272	151	
VVS300	1945	813	318	151	
VVS400	2650	813	215	151	
VVS500	3150	813	215	151	
VVS650	3250	813	220	151	

Vertical outlet END (US)					
Size	WB	LB	WB1	LB1	
VVS150	1520	795	280	127	
VVS180	1520	713	293	127	
VVS230	1945	813	284	127	
VVS300	1945	813	330	127	
VVS400	2650	813	228	127	
VVS500	3150	813	228	212	
VVS650	3250	813	234	212	

Side inlet-outlet END (BS)					
Size	HC	LC	HC1	LC1	
VVS021	213	380	115	165	
VVS030	313	380	131	165	
VVS040	313	380	131	165	
VVS055	413	380	149	165	
VVS075	413	380	209	165	
VVS100	613	380	159	165	
VVS120	613	380	177	165	

Side outlet END (BS)					
Size	HC	LC	HC1	LC1	
VVS021	213	380	114	202	
VVS030	313	380	160	202	
VVS040	313	380	165	202	
VVS055	413	380	137	202	
VVS075	413	380	197	202	
VVS100	613	380	158	127	
VVS120	613	380	198	127	

ADDITIONAL CONFIGURATION FUNCTIONS - VVS 021-650 - RECUPERATOR (HEX & PREMIUM PLUS), REGENERATOR (HEAT WHEEL), SUPPLY & EXHAUST

Dimension	Function version	Remaining configuration functions – typical lengths of function arrangement									
		VVS021	VVS030	VVS040	VVS055	VVS075	VVS100	VVS120			
F	F7/F9	762	762	762	762	762	762	762	762	762	762
	EU4/FS	366	366	366	366	366	366	366	366	366	366
H	H	366	366	366	366	366	366	366	366	366	366
	C	366	366	366	366	366	366	366	366	366	366
S	S	1098	1098	1098	1098	1098	1098	1098	1098	1098	1098
	E(e1)	366	366	366	366	366	366	366	366	366	366
E	E(e2)	762	762	762	762	762	762	762	762	762	762
	E(e3)	1098	1098	1098	1098	1098	1098	1098	1098	1098	1098
M	M	762	762	762	762	762	762	762	762	762	762
	W	1098	1098	1098	1098	1098	1098	1098	1098	1098	1098

Dimension	Function version	Remaining configuration functions – typical lengths of function arrangement									
		VVS150	VVS180	VVS230	VVS300	VVS400	VVS500	VVS650			
F	F7/F9	762	762	762	762	762	762	762	762	762	762
	EU4/FS	366	366	366	366	366	366	366	366	366	366
H	H	366	366	366	366	366	366	366	366	366	366
	C	366	366	366	366	366	366	366	366	366	366
S	S	1098	1098	1098	1098	1098	1098	1098	1098	1098	1098
	E(e1)	366	366	366	366	366	366	366	366	366	366
E	E(e2)	762	762	762	762	762	762	762	762	762	762
	E(e3)	1098	1098	1098	1098	1098	1098	1098	1098	1098	1098
M	M	1098	1098	1098	1098	1098	1098	1098	1098	1098	1098
	W	1098	1098	1098	1098	1098	1098	1098	1098	1098	1098



COMPONENTS

DIRECT DRIVE PLUG FAN SET

Design and application

- » Centrifugal fan, without casing, single inlet, PLUG type, with backward curved blades.
- » Impeller made of SAN (styrene/acrylonitrile) construction material with 20% glass fiber.
- » Direct drive – fan impeller installed directly on motor shaft.
- » Fan section consisting of single or multiple fans (fan array) in order to ensure optimum working parameters.



Specification

- » Low and medium pressure ventilation systems with fan static pressure not exceeding 2000 Pascals.
- » Maximum fan set working temperature: 60°C.

> AC MOTORS

- » Fan and motor mounted on common housing, separated from AHU casing by set of rubber vibration absorbing mounts.
- » Motors of TEFC type (Totally Enclosed, Fan-Cooled).
- » Motors fitted for IEC standard.
- » Variable Frequency Drive (VFD) – standard equipment of the fan-set.



> EC MOTORS

- » Set of fan and motor mounted on common rail, fixed to the AHU fan diaphragm.
- » EC motors are Permanent Magnet motor, characterised by much higher efficiency vs traditional inductive AC motors.
- » EC motors (Electronically Commutated) – where mechanical commutator switching the windings has been replaced with electronic one.
- » Change of revolutions is done by means of changing the frequency rate of windings switching (rate or magnetic field rotating).
- » Highly inductive permanent magnets have applied in EC motors used by VTS, which enabled to achieve high torque at relatively small dimensions, together with reaching IE4 efficiency class.



CASING

Design and application

- » Casing structure made of 'sandwich' type panels formed in 'C' shape and reinforced by system of internal frames.
- » 'Sandwich' double skin panels made of rigid polyurethane foam.
- » Indoor and outdoor application.
- » Inspection panels mounted on AHU side.
- » Casing supported on steel base rails.



Specification

- » Working temperature: (-40)°C ÷ (+90)°C.
- » Panel thickness: 40mm.
- » Thermal conductivity PPU $\lambda = 0,022$ W/mK.
- » Casing fire resistance: non-flammable, non fire spreading (NRO).
- » Moisture absorption: 0,04%.
- » PPU density: $\rho = 42$ kg/m³.
- » Eurovent certification
 - Mechanical strength of casing: -1000 Pa ÷ 1000 Pa < 2mm (D₁ - PN EN 1886: 2008).
 - Casing tightness: (MB): (-400) Pa -0,05 l/sm², (+700) Pa - 0,13 l/sm² (L₁ - PN EN 1886: 2008); (RU): (+400) Pa - 0,93 l/sm².
 - Casing heat transfer coefficient: K = 0,6 W/m²K (T₂ - PN EN 1886: 2008).
 - Thermal bridges coefficient: K_b = 0,52 (TB₃ - PN EN 1886: 2008).

PANEL FILTERS

Design and application

- » Pleated filtration fabric shielded by steel net, installed in 50 mm thick frame.
- » Filtration fabric made of polyester fibres.
- » Applied as initial air filtration stage.



Specification

- » Working temperature: max (+70)°C, 100% RH.
- Filtration classes available**
- » ISO Coarse 75% (ISO 16890)
 - » - G4 (EN779).

BAG FILTERS

Design and application

- » Filtration fabric made of polyester fibres.
- » Bags fixed to 25 mm thick frame.
- » Filters of class M5 - bags length: 300 mm, Filters of class F7 & F9 - bags length: 600 mm.
- » Applied as initial, secondary of final air filtration stage.




Specification

- » Working temperature: max (+70)°C, 100% RH.
- Filtration classes available**
- » ISO ePM10 50% (ISO 16890)
 - » - M5 (EN779).
 - » ISO ePM2.5 65% (ISO 16890)
 - » - F7 (EN779).
 - » ISO ePM1 70% (ISO 16890)
 - » - F9 (EN779).

ROTARY HEAT WHEEL

Design and application

- » Rotor made of aluminum with shaft suspended on bearings, installed in steel housing.
- » Rotor filling – two layers of alternately wound aluminum foil – one flat, the other – corrugated – making small ducts for the air.
- » Rotor drive system with smooth revolutions control enabling to maintain highest recovery efficiency and to adjust degree of recovery performance.
- » Purge zone reducing the cross-contamination effect of contaminated exhaust air to supply to absolute minimum.
- » Set of gaskets installed both on the wheel outer edge and bar separating supply from exhaust air being an additional protection against cross-contamination.
- » Rotary heat wheel recovers sensible heat from return air to supply, which passes the unit in opposite direction. The process enables heat recovery in winter time, same as cool recovery in summer.
- » Humidity recovery from return to supply in case the rotor pad temperature is lower than dew point of return air – typically during winter season.

**Specification**

- » Up to 86% of energy recovery, depending on airflow rate and its velocity in the heat wheel window.

CROSSFLOW PLATE HEAT RECUPERATOR

Design and application

- » Recuperator made of crosswise stamped aluminum plates, between which supply and exhaust air passes alternately in counterflow arrangement.
- » As standard, the recuperator is equipped with by-pass damper, enabling its securing against frosting and heat recovery capacity regulation.
- » Optionally, the recuperator can be equipped with integrated mixing box.
- » The recuperator provides sensible heat recovery for warmer air to the heat recovery of heat from return air to supply. For summer – recovery of chill from return air to supply.

**Specification**

- » Energy recovery at very high supply and exhaust air stream separation (reaching 99,9%)
- » Heat recovery reaching up to 80% depending on flow rate face velocity of the air passing the recuperator.

RUN-AROUND COIL

Design and application

- » Set of two water coils – one in supply, the other one in exhaust airstream.
- » The coil in return airstream recovers the heat (cooler) and passes it to the coil in the supply air (heater) by means of heat-transfer fluid (water-glycol mixture). In case of chill recovery, entire process is reversed.
- » System applied for supply and exhaust air handling units installed remotely to each other."

**Specification**

- » Indirect Energy recovery (sensible heat) at 100% supply and exhaust airstreams separation.
- » Max heat-transfer fluid operation pressure: 1,6MPa=16bar (tested 21 bar).
- » Max glycol concentration: 50%.

COUNTERFLOW HEXAGONAL RECUPERATOR

Design and application

- » Hexagonal heat recovery recuperator made of crosswise stamped aluminum plates, between which supply and exhaust air passes alternately in counterflow arrangement.
- » As standard, the recuperator is equipped with by-pass damper, enabling its securing against frosting and heat recovery capacity regulation.
- » Optionally, the recuperator can be equipped with integrated mixing box.
- » The recuperator provides sensible heat recovery for warmer air to the heat recovery of heat from return air to supply. For summer – recovery of chill from return air to supply.

**Specification**

- » Energy recovery at very high supply and exhaust air stream separation (reaching 99,9%).
- » Heat recovery reaching up to 93% depending on flow rate face velocity of the air passing the recuperator.

Design and application

- » Section equipped with two air inlets/outlets aided with dampers, enabling regulation of fresh and recirculation air share (recirculation).

**Specification**

- » Direct Energy recovery (sensible and latent heat) resulting from partial mixing of fresh air with return one.
- » Control of fresh air share in entire airflow supplied to handled spaces.
- » Working temperature range: -40 ÷ +70°C.

WATER HEATER

Design and application

- » Block of copper pipes integrated with another block of aluminum fins, creating expanded heat exchange surface. Pipes are bonded to the collectors, equipped with headers (for connecting entire coil to the medium supply system).
- » Heating of the air supplied to the handled spaces.
- » Re-heating of the air as a part of air dehumidifying process.
- » The coil can be applied if heating medium is available (local boiler or district heating system).
- » Coil headers are equipped with medium damping valve and air vent.
- » Connecting the coil in parallel medium flow vs air, will result in its capacity reduction by over a dozen percent.

Specification

- » Max glycol concentration: 50%.
- » Max medium temperature: 150°C.
- » Max medium working pressure: 1.6MPa = 16bar (test: 21bar).
- » Heating capacity: parameter resulting from individual performance calculation of selected unit (CCOL).
- » Medium side pressure drop – parameter resulting from individual performance calculation of selected unit (CCOL).



ELECTRIC HEATER

Design and application

- » Set of resistive heating elements made of CR-Ni-Fe alloy, 6 kW/400V each.
- » Coils mounted on hot-dip galvanized steel frame.
- » Heater is equipped with power terminals and thermostat protecting against overheating.
- » In case of AHU with complete controls, heater is equipped with integrated capacity control module.
- » Heating capacity can be modified by means of smooth regulation module (HE module, set of Solid State Relays as optional parts of AHU controls) or by means of automatic engaging of next heating sections.



Specification

- » Max permissible ambient temperature around heating elements: 65°C.

DIRECT EXPANSION COIL AS CONDENSER IN HEAT PUMP CIRCUIT

Design and application

- » Block of copper pipes integrated with another block of aluminum fins, creating expanded heat exchange surface. Pipes are bonded to the collectors, equipped with headers (for connecting entire coil to the cooling system circuit).
- » Heating of the air supplied to the handled spaces.
- » Re-heating of the air as a part of air dehumidifying process.



WATER COOLER

Design and application


- » Block of copper pipes integrated with another block of aluminum fins, creating expanded heat exchange surface. Pipes are bonded to the collectors, equipped with headers (for connecting entire coil to the medium supply system).
- » Cooling of the air supplied to handled spaces.
- » Cooling and dehumidifying of the air as a part of air complex dehumidifying process in summer season.
- » Coil can be applied in complex air conditioning systems consisting of few or over a dozen of units supplied from common chilling source (chiller) or in case of single unit of relatively high cooling capacity.



DX COOLING COIL

Design and application

- » Block of copper pipes integrated with another block of aluminum fins, creating expanded heat exchange surface. Pipes are bonded to the collectors, equipped with headers (for connecting entire coil to the cooling system circuit).
- » DX cooler is also available as heater execution (so called Condenser).
- » Cooling and dehumidifying of the air as a part of air complex dehumidifying process in summer season.
- » Coil usually applied for smaller cooling capacity systems vs water coolers or for individual air conditioning systems.



Specification

- » Min. Refrigerant evaporation temperature: +3°C.
- » Max refrigerant working pressure: 2.2MPa=22bar (test: 29 bar).
- » Cooling capacity - parameter resulting from individual performance calculation of selected unit (CCOL).

Specification

- » Max glycol concentration: 50%.
- » Min supplying medium temperature: +2°C.
- » Max medium working pressure: 1.6MPa = 16bar (test: 21bar).
- » Cooling capacity: parameter resulting from individual parameters of selected unit (CCOL).
- » Medium pressure drop / flow rate: parameter resulting from individual performance calculation of selected unit (CCOL).
- » For reversed operating mode (heating) max medium working temperature: 140°C.

EVAPORATIVE HUMIDIFIER

Design and application

- » Humidifying process based on water adiabatic evaporation from the humidifier pad.
- » Humidifying pad made of CELDEK II material.
- » Humidifier housing made of stainless steel.
- » System of direct water dropping (VVS021-VVS055).
- » System of water recirculation aided by pump (VVS075-VVS650).
- » Droplet eliminator integrated with humidifier filling (VVS075-VVS650).
- » System is equipped with water drainage system preventing against high water level in the pan and floating valve controlling its refilling (VVS075-VVS 650).

**Specification**

- » Max air face velocity across the humidifier pad: 3,00 m/s (VS 21-VS 55); 4,00 m/s (VS 75-VS 650).
- » Water pressure range: 0,15 ÷ 0,75 MPa.
- » Requirements regarding water quality – standard tap water.

AIR DAMPER

Design and application

- » Blades made of aluminium with rubber gasket on the edges.
- » Aluminium frame.
- » Blades drive realized by means of gears made of composite material, installed on frame internal side.
- » Damper is equipped with square pivot, fitted for actuator (dampers of cross section greater than 4 m² have 2 linked pivots).

**Specification**

- » Air leakage at closed damper: 50 m³/h·m² - at 100 Pascals of pressure difference.
- » Working temperature range: -40 ÷ +70°C.

FLEXIBLE CONNECTION

Design and application

- » Flexible connection made of 1 mm thick and 30 mm wide hot-dip galvanized steel profiles and polyester fabric coated with PVC.
- » Flame resistance: UL94 - HB [ISO 1210].
- » Flexible connection resistant to UV radiation.
- » Working temperature range: -30°C do +70°C.
- » Max connection length (fully spread position): 110 mm.
- » Flexible connection installed on each AHU/Duct joint eliminates transfer of possible AHU vibrations to the ventilation ductwork.

**Specification**

- » Max air face velocity: 5m/s.
- » Working conditions: -40 ÷ +70°C.

SOUND ATTENUATING SECTION

Design and application

- » Sound attenuator consists of noise attenuating bars installed in the AHU casing.
- » Attenuating bars of 140 mm width filled with sound-absorbing, inflammable mineral wool (density: 60 and 80 kg/m³).
- » Attenuating bar housing: frame made of hot-dip galvanized steel.
- » Bar outer surface: thin veil preventing against bar filling migration to the air.
- » Number of attenuating bars: 2-13, depending on block size.

**Specification**

- » Max air face velocity: v=5m/s.
- » Working conditions: -40 ÷ +70°C*.

INTERNAL LIGHT

**Design and application**

- » Energy saving lamp with securing shade.
- » Facilitation of AHU inspection actions: filter, fan and humidifier compartment.

Specification

- » Working conditions: -40 ÷ +70°C.

AIR INTAKE AND DISCHARGE LOUVERS

Design and application

- » Air intake louver made of aluminium profile, blades made of ABS material.
- » Air outlet louver made of aluminium profile, blades made of ABS material.
- » Protection of air handling unit installed outdoor against meteorological conditions (precipitation, sand).

**Specification**

- » Max air face velocity: 5m/s.
- » Working conditions: -40 ÷ +70°C.

CONTROLS

All controls for VENTUS air handling units is available as optional equipment.

Range of controls is always fitted to configuration of the AHU selected in the CCOL4 tool. Controls is capable to regulate all user parameters: air temperature, its humidity, maximum permissible CO₂ concentration and the flow rate. Also, controls support preventive and securing functions like protection of the water heater against freezing or energy recovery system against icing, protection of motors against overloading, monitoring of air filters actual status of contamination and many other. Applied algorithms can optimize performance of all air treatment components in order to minimize consumption of all energy media supplied to the unit.

The system includes control and power supply circuit.



HMI Basic

- » Engaging and disengaging the AHU, change of operational modes.
- » Change of temperature, airflow, humidity, max CO₂ level settings, etc.
- » Errors reporting.
- » Time schedule setting.



HMI Advanced

- » All users and service functions except visualization
- AHU engaging and disengaging,
- Change of operational modes.
- » Change of temperature, airflow, humidity, max CO₂ level settings, etc.
- » Parameters setting and reporting.
- » Errors reporting.
- » Time schedule setting.



USER

BMS

- » User function like in HMI Advanced.
- » User's customized visualization (BMS).



Remote visualization

- » All user function like in HMI Advanced:
 - VTS visualization.
- » Clear interface of schedule programming, presenting unit's operating time individually for each day of the week.
- » Energy consumption analysing module.
- » Individual parameters monitoring of each functional block.
- » Filing of all AHU's parameters recorded in few minutes intervals.



PAREMETERS REGULATION FUNCTIONS

Regulation of temperature and humidity


- » Regulation of supply, return air temperature and humidity in handled spaces.
- » Control of water coils valves (heater, cooler) and condensing unit.
- » Control of rotary heat wheel revolutions, by-pass damper and mixing box, depending on AHU type and configuration.

Airflow rate regulation

- » Constant Air Volume (CAV), available as standard.
- » Constant static pressure maintenance in trunk duct (Variable Air Volume – VAV) available as option.
- » Setting of constant revolutions for each fan individually – VFD setting for AC motors or constant revolutions percentage in case of EC motors.

CO₂ regulation

- » By means of mixing box – for units with air recirculation.
- » By means of airflow rate change – for all types of supply and exhaust units (function can be engages together with mixing box control).

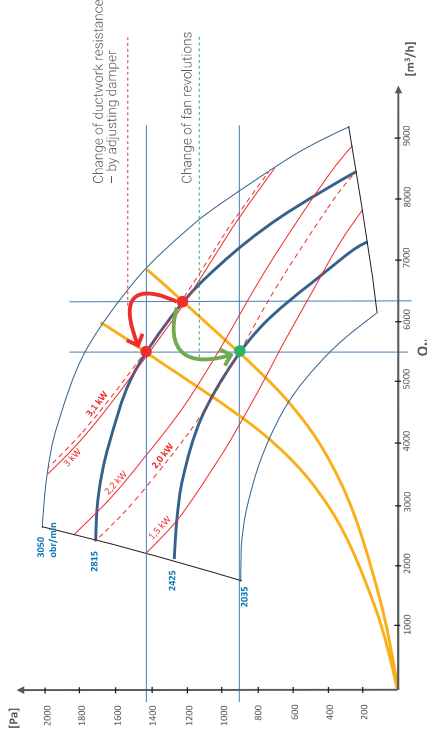

PROTECTION FUNCTIONS

- » Protection against rotary heat wheel icing, by means of wheel revolutions reduction.
- » Protection against hexagonal counterflow and cross-flow recuperator icing by means of by-pass damper opening. Functions realized as optional:
 - Optimizing of icing protection function by change of minimum return air temperature threshold downstream the energy recovery unit vs return air parameters.
 - Minimizing of recovery efficiency drop during defrosting
 - Anti-freezing protection of water heater
 - Antifreeze thermostat installed downstream the heater
 - Strap-on return water temperature sensor
- » Fans overload protection (functions realized by EC motors drives)
- » Fire alarm input – AHU immediate disengaging in case of lack of external start permission from overall fire protection system.



PREVENTIVE FUNCTIONS



- » Constant filter contamination status control:
 - Constant monitoring of filter pressure drop by means of static pressure transducers,
 - Evaluation of filter contamination status for vs actual airflow rate.
- » Fans shutting-down delay – fans run out for systems with electric heater
- » Water heater pre-heating before fan's start up.
- » Periodical heater pump engaging in summer – to prevent against limescale accumulation
- » Opening of water heater regulation valve before engaging the fans.

TIME SCHEDULE FUNCTIONS

- » Weekly schedule operational modes programming (HMI Advanced i Basic).
- » Clear visualization of schedule settings by means of web-browser (computers and mobile devices).

POWER SUPPLY AND CONTROL CIRCUITS

- » The mains component of the controls is the control box – with microprocessor controller installed inside. The control box is usually mounted on side wall of the AHU or in units direct vicinity.
- » Control box is equipped with controller, power protection circuits, terminal block enabling connecting of all control elements.
- » Electric protection of fans, rotary heat wheel drive, control elements and heater pump are installed inside the control box.
- » Control of fan-sets (variable frequency drives in case of AC motors of specialized drives for EC ones) is realized by means of digital communication based on ModBUS protocol. Fan control elements are set with individual address enabling them to be properly identified in the control system.
- » Communication with static pressure and CO2 transducers also realized by ModBUS protocol.
- » For other control elements, digital or analogue signals are used.

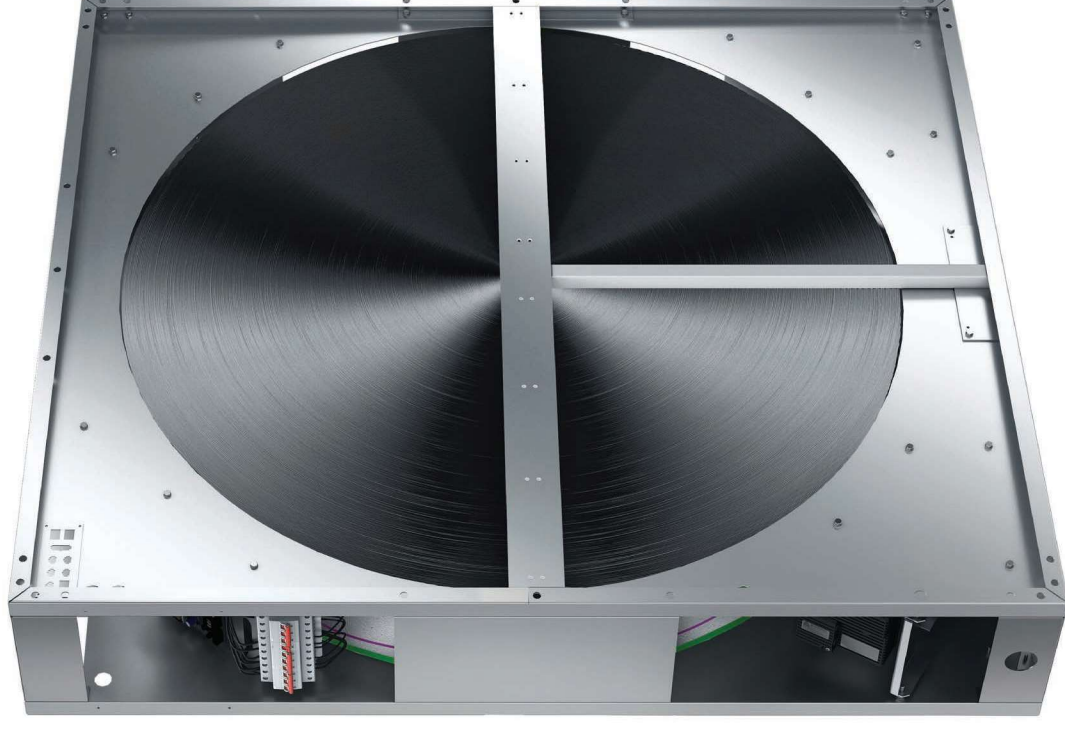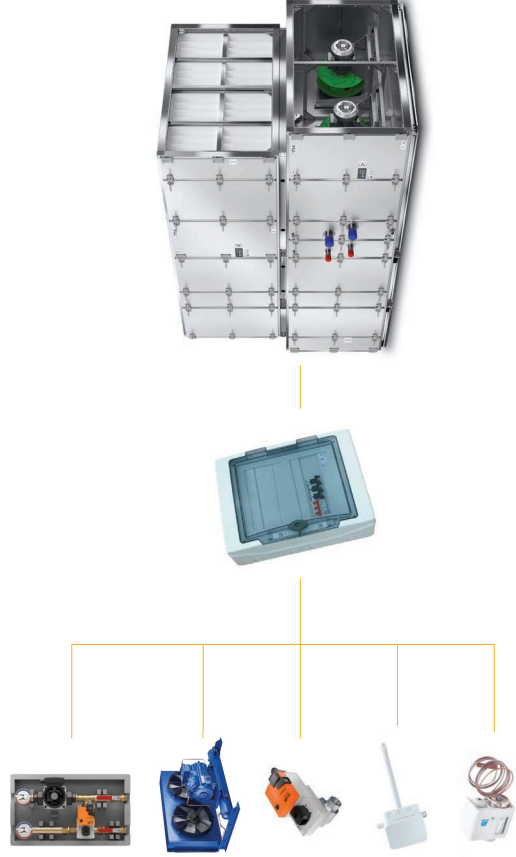

CONTROL ELEMENTS

CONTROL ELEMENTS

Functions and application

- » Regulation of supply and exhaust air temperature.
- » Protection of the energy recovery unit against freezing.
- » Outdoor air temperature measurement in order to identify need of heat/chill recovery and engagement protecting function for water heater.



Operational parameters

- » Measurement range: -50°C to +90°C.
- » Measurement accuracy: ±0,5K.
- » Sensor type: NTC 10k.
- » Air humidity range: 5 ÷ 100%.
- » Protection degree: IP67.
- » Shielded cable length: max. 100 m.

ROOM AIR TEMPERATURE SENSOR

Functions and application

- » Regulation of temperature in handled space.



Operational parameters

- » Measurement range: -20°C do +70°C.
- » Measurement accuracy: ±0,5K.
- » Sensor type: NTC 10k.
- » Air humidity range: 5 ÷ 95% no condensation.
- » Protection degree: IP20.
- » Shielded cable length: max. 100 m.

STRAP-ON MEDIUM TEMPERATURE SENSOR

Functions and application

- » Protection of water heater against freezing by means of return medium temperature monitoring.

(Function supported by controller. Sensor out of VTS offer.)



ANTI-FREEZE THERMOSTAT

Functions and application

- » Protection of water heater against freezing by means of air off-coil temperature monitoring (recommended temperature threshold setting: +5°C).



OVERHEAT PROTECTION THERMOSTAT FOR ELECTRIC HEATER

Functions and application

- » Protection of electric heater against overheating.



Operational parameters

- » Power cut-off temperature setpoint: 65°C.
- » Power re-switch on temperature setpoint: 45°C.
- » Nominal voltage: 20V DC or 230V AC.
- » Output signal: potential-free contact.

DIFFERENTIAL PRESSURE SWITCH

Functions and application

- » Monitoring of filter's contamination.
- » Control of the operation of a direct driven fan unit in case of cooperation with electric heater.




Operational parameters

- » Measurement range: 30 do 500 Pa.
- » Nominal operating voltage: 250V AC (Imax=3A).
- » Output signal: potential free contact.
- » Working temperature range: -20°C do 60°C.
- » Protection degree: IP 54.

FILTER CONTAMINATION INDICATOR

Functions and application

- » Measurement of air pressure drop on filters, activated manually (button).
- » Signal light (LED) informing about exceeding pressure drop thresholds.
- » Low battery warning light signal.



Operational parameters

- » Max. Pressure difference: 800 Pa.
- » Accuracy: 2,5% of the range.
- » Protection degree (interface side): IP 65.

DIFFERENTIAL PRESSURE TRANSDUCER

Functions and application

- » Regulation of supply and exhaust air (CAV function).
- » Regulation of static pressure in ventilation system trunk duct (VAV function).
- » Constant monitoring of filter pressure drop (control of filter contamination level).



Operational parameters

- » Measurement range: 6000 Pa.
- » Measurement accuracy: 0,25% of the range.
- » Communication: ModBus RTU.
- » Supply voltage: 21,5V to 30V DC or 21,5V do 26,5V AC.
- » Working temperature range: -20°C do 50°C.
- » Protection degree: IP 65.



AIR HUMIDITY TRANSDUCER

Functions and application

- » Regulation of supply and return air humidity in handled spaces (support for air humidifying and dehumidifying).
- » Measurement of return air humidity – automatic change of anti-freeze threshold temperature setting of cross-flow recuperator depending on return air parameters*.



Operational parameters

- » Measurement range: 0-100%.
- » Tolerance: +/- 3%.
- » Communication: ModBus RTU.
- » Supply voltage: 24V DC.
- » Working temperature: -40°C to 80°C.
- » Protection degree: IP 65.

* Also available as integrated with air temperature sensor

CO₂ TRANSDUCER

Functions and application

- » Regulation of CO₂ concentration in handled spaces (control of mixing box or airflow rate).



Operational parameters

- » Measurement range: 0 do 2000 ppm.
- » Tolerance:
 - between 400 and 1250 ppm: +/- 3%.
 - between 1250 and 2000 ppm: +/- 5%.
- » Communication: ModBus RTU.
- » Supply voltage: 24V DC.
- » Working temperature: 0 do 50°C.
- » Protection degree: IP 54.

ON/OFF DAMPER ACTUATOR

Functions and application

- » Airflow opening or closing in the AHU (connectors of air intake and discharge) – for units with water heater actuators with return spring are applied.



Operational parameters

- » Regulation mode: ON/OFF (two-point).
- » Angle of rotation: 90°.
- » Torque: 16 Nm (max damper cross-section: 4 m²).
- » Full open/close time: 120 s (with spring: 10 s).
- » Supply voltage: 24V AC/DC.
- » Working temperature: -20°C do 50°C.
- » Protection degree: IP 54.

SMOOTH CONTROL DAMPER ACTUATOR

Functions and application

- » Smooth regulation of return and fresh air mixing (recirculation) – for units with water heater actuators with return spring are applied.
- » Protection of cross-plate or hexagonal recuperator against frosting – smooth regulation of bypass damper opening.



Operational parameters

- » Regulation mode: 0 do 100% (smooth).
- » Control signal: 0-10V.
- » Angle of rotation: 90°.
- » Torque: 16 Nm (max damper cross-section: 4 m²).
- » Full open/close time: 90s (with spring: 10 s).
- » Supply voltage: 24V AC/DC.
- » Working temperature: -20°C do 50°C.
- » Protection degree: IP 54.



SET FOR WATER HEATER CAPACITY REGULATION (PUMP GROUP)

Functions and application

- » Smooth regulation of water heater capacity.



Operational parameters

- » Regulation mode: 0 to 100% (smooth).
- » Control signal: 0-10V.
- » Full open/close time: 90 s.
- » Valve supply voltage: 24V AC/DC.
- » Pump supply voltage: 230V AC.
- » Working temperature: +5°C do 50°C.
- » Medium temperature range: -10°C to 120°C.
- » Max glycol concentration: 50%.
- » Protection degree: IP 54.

THREE-WAY VALVE FOR WATER HEATER OR COOLER

Functions and application

- » Smooth regulation of water heater or cooler capacity.



Operational parameters

- » Regulation mode: 0 do 100% (smooth).
- » Control signal: 0-10V.
- » Full open/close time: 90 s.
- » Valve supply voltage: 24V AC/DC.
- » Working temperature: +5°C do 50°C.
- » Medium temperature range: -10°C do 120°C.
- » Max glycol concentration: 50%.
- » Protection degree: IP 54.

ELECTRIC HEATER CONTROL MODULE – MHE TYPE

Functions and application

- » Power supply, protection and smooth regulation of electric (heating) capacity of multi-stage electric heaters by means of PWM (Pulse Width Modulation).



Operational parameters

- » Regulation mode: 0 to 100% (smooth).
- » Nominal voltage: 3*400V/50Hz.
- » Control circuits supply voltage: 24V AC.
- » Binary input signal: 3 x 24V DC.
- » Binary output signal: 6 x 24V DC.
- » PWM: 1 x 24V DC.
- » Working temperature: 0°C do 50°C.

VARIABLE FREQUENCY DRIVE

Functions and application

- » Smooth regulation of fan-set capacity.
- » "Soft-start" of the fan without mechanical and electric shock.
- » Motor protection against overloading and stucking.



Operational parameters

- » Frequency regulation range: 10 ÷ 100 Hz.
- » Communication: ModBus RTU RS485.
- » Supply voltage:
 - single-phase 200 ÷ 240V AC.
 - three-phase 380 ÷ 480V AC.
- » Working temperature: 0°C to 40°C.
- » Protection degree: IP 20.

HMI BASIC USER INTERFACE



Functions and application

- » Maintenance of Air handling unit – temperatures setting and reading, change of operating modes, independent time schedule management, alarm codes displaying.
- » Configuration of controller's universal inputs and outputs.

Operational parameters

- » Power supply directly from the controller.
- » Communication with controller – RS485 serial port.
- » Max length of communication cable: max. 500 m.
- » Working temperature: -20°C to 60°C.
- » Humidity: <85% (no condensation).
- » Protection degree: IP 31.

HMI ADVANCED USER INTERFACE



Functions and application

- » Maintenance of Air handling Unit – parameters setting and reading (temperature, airflow, CO₂, humidity etc), change of operational modes.
- » Weekly schedule programming.
- » Service maintenance – configuration of all advanced AHU operating parameters, configuration controller's universal inputs and outputs.
- » Remote configuring of variable frequency drives.
- » AHU alarms and errors monitoring (full text description) and cancelling.

Operational parameters

- » Power supply directly from the controller
- » Communication with controller – RS485 serial port
- » Max length of communication cable: max. 1200 m,
- » Working temperature: -20°C to 60°C.
- » Humidity: <85% (no condensation).
- » Protection degree: IP 20.

SUPPLY AND CONTROL BOX



Functions and application

- » Control of all components and processes of Air Handling Unit, especially realization of regulation (temperature, airflow, CO₂, humidity) and protection functions (anti-freezing of energy recovery heat exchanger or water heater, fan-sets overloading etc).
- » Alarms handling, self-diagnostics.
- » Filling of all operating parameters history.
- » Communication with user interfaces (HMI).

Operational parameters

- » Supply voltage: 3x400 VAC or 1x230 V AC.
- » Supply frequency: 50 Hz, +/- 1 Hz.
- » Control circuits supply voltage: 24 V AC.
- » Water heater pump supply voltage: 230 V AC (max.10A).
- » Communication with internal controls circuits, VFDs or EC motors controller: ModBus RTU.
- » ModBus communication: TCP/IP.
- » Working temperature: 0 to 50°C.
- » Humidity: <85% (no condensation).
- » Protection degree: IP 54.





04




VENTUS Compact

VENTUS COMPACT

SUSPENDED AIR HANDLING UNITS


> with counter-flow heat exchanger (hex)

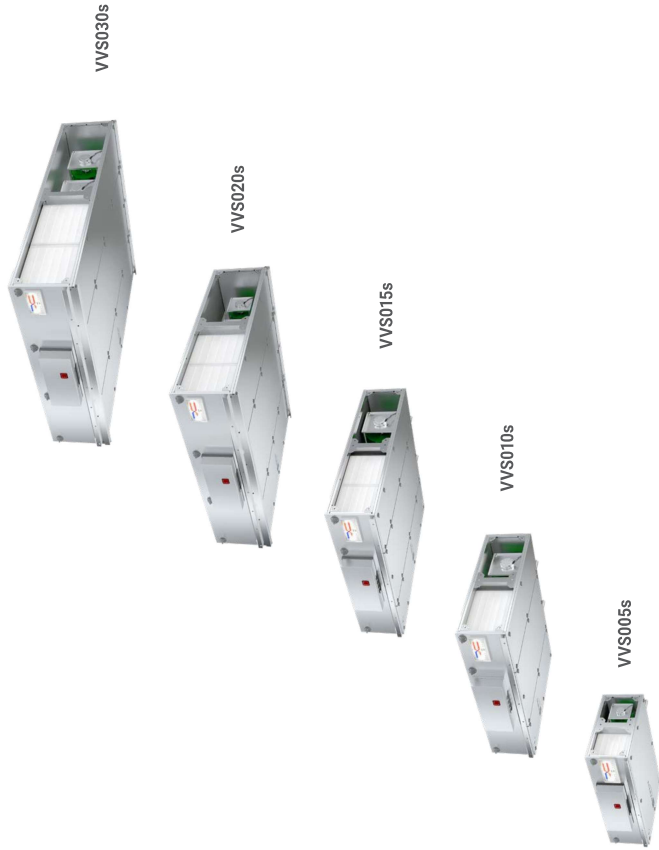

← 150 m³/h - air flow range - 3300 m³/h →

FLOOR MOUNTED AIR HANDLING UNITS

> with rotary heat exchanger
or hex counter-flow heat exchanger

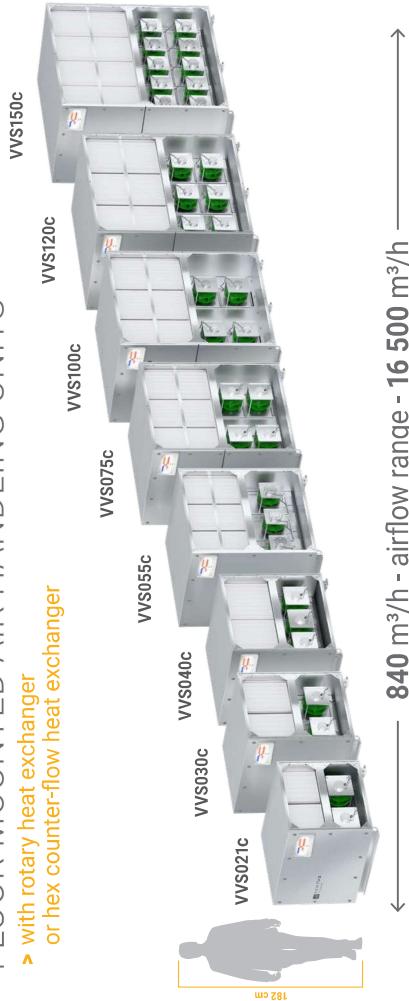

← 840 m³/h - air flow range - 16 500 m³/h →

> with rotary heat exchanger
and heat pump



← 1 200 m³/h - air flow range - 5 500 m³/h →

> TOP with counter-flow
heat exchanger (hex)



← 1 250 m³/h - air flow range - 4 000 m³/h →

ADDITIONAL AIR TREATMENT FUNCTIONS



SUSPENDED UNITS

FLOOR-MOUNTED UNITS



up to **90%**
recovery efficiency



max. 490 mm



up to **90%**
recovery efficiency



max. 880 mm



up to **90%**
recovery efficiency



max. 2940 mm



MINERAL WOOL
INSULATION



HIGHLY EFFICIENT
HEX COUNTER-FLOW
HEAT RECOVERY



ENERGY SAVING
AND SILENT FANS WITH
EC MOTORS



PLUG&PLAY
PRODUCT



INTEGRATED
MULTIFUNCTIONAL
CONTROLS



ENERGY SAVING
AND SILENT FANS WITH
EC MOTORS



HIGHLY EFFICIENT ROTARY
AND HEX COUNTER-FLOW
HEAT EXCHANGER



ENERGY SAVING
AND SILENT FANS WITH
EC MOTORS



PLUG&PLAY
PRODUCT



INTEGRATED
MULTIFUNCTIONAL
CONTROLS

VENTUS Compact TOP
with **hex counter-flow
heat exchanger**

VENTUS Compact
with **rotary heat exchanger
or hex counter-flow heat exchanger**



> VENTUS Compact

7 500 m³/h



0,5L

> Standard Air Handling Units

7 500 m³/h



1L

VENTUS COMPACT TOP FLOOR-MOUNTED UNITS WITH VERTICAL DUCT CONNECTION

CASING


- » Panels filled with mineral wool, enclosed with steel sheet on both sides.
- » Casing parameters according to EN 1886: TZ, TB3, L1, D1, F9.
- » Fan and filter section panels fitted with hinges.



MINI-PLEAT OR BAG FILTERS

Air filters with extended high efficiency filtration surface.

- » Supply - EU7
- » Exhaust - EU5



DIMENSIONS

- » Unit width 88 cm - can be transported through the opening of 90 cm without disassembling the device.



CONTROLS

- » Multifunctional controls, integrated with the unit – fully pre-configured and ready to run.



ENERGY RECOVERY

- » Highly efficient counterflow hex recovery with by-pass.
- » Recovery efficiency reaching 90%.



EC MOTORS

- » Efficient, silent and low vibrations fan with electronically commutated motor in a IE4 class.

VENTUS COMPACT TOP FLOOR-MOUNTED UNITS WITH VERTICAL DUCT CONNECTION

FOR USE IN ANY FACILITY

- » No external refrigeration equipment taking up space in your facility
- » No external noise sources

OPTIMUM MATCHING

- » Factory fit of heat pump and air handling unit components
- » Manufacturer's warranty on the final air handling unit and heat pump product

HIGH ENERGY EFFICIENCY

- » High efficiency sorption rotary regenerator for excellent heat and moisture recovery
- » Installation of multi-row condensers and evaporators on both sides of the regenerator ensures the most efficient operation of the heat pump

CONVENIENT TRANSPORT, QUICK INSTALLATION

- » The unit is divided into easy to transport and easy to assemble complete functional modules

EASY COMMISSIONING


- » Multifunctional factory assembled controls ready to work as soon as the unit is assembled
- » Easy commissioning without service

COHERENT CONTROL SYSTEM

- » Integrated control system for air handling unit and heat pump
- » Full monitoring and remote diagnostics of all components

HEAT PUMP FUNCTIONS

- » Supply air cooling in summer
- » Reduction of supply air heating costs during other periods of the year

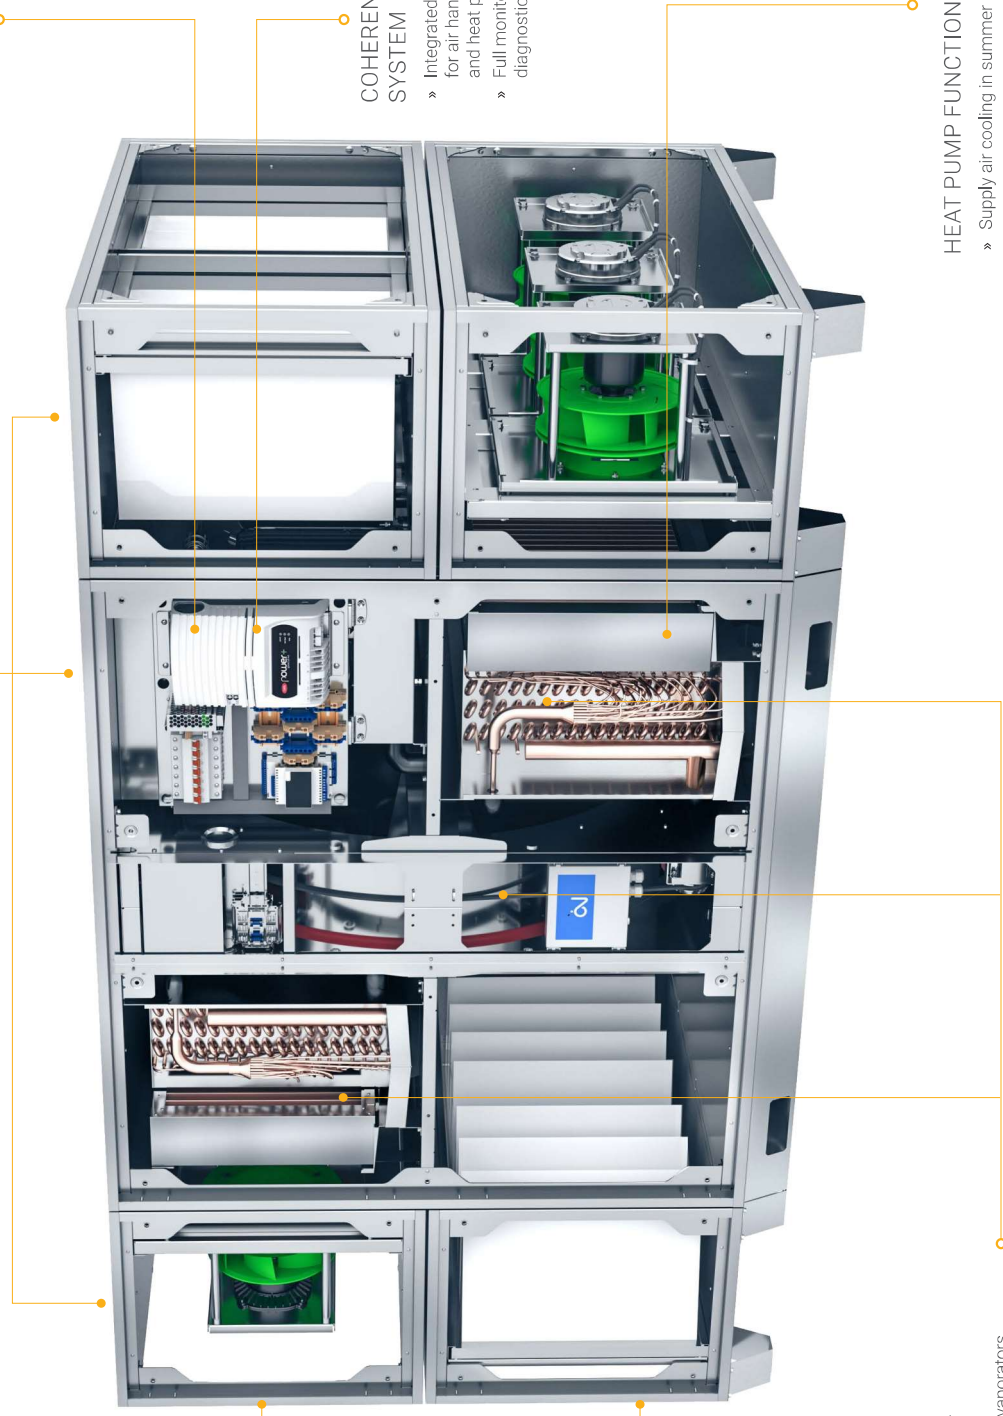

VENTUS COMPACT FLOOR MOUNTED UNITS WITH HEAT PUMP



HEATING AND COOLING FUNCTION

- » Four-way valve automatically switches reverse operation modes
- » Automatic defrosting function in winter

SMOOTH REGULATION OF HEATING AND COOLING POWER

- » Inverter compressor with DC motor smoothly adjusts cooling and heating power
- » Controller equipped with sensors fully controls cooling parameters of the heat pump system

MULTI-STAGE HEAT PUMP QUALITY CONTROL


- » Ongoing monitoring of the production process
- » Individual leakage and operational check confirmed by electronic report
- » UDT (Office of Technical Inspection) certificate

OPTIMISATION OF COOLING PARAMETERS

- » Electronic expansion valve dynamically adjusts fluid flow to current air handling unit parameters

SMOOTH REGULATION OF HEAT RECOVERY POWER


- » Electronically controlled stepper motor of the rotary heat exchanger smoothly regulates heat recovery capacity
- » In winter time the automation system ensures three-stage frost protection for the rotary heat exchanger

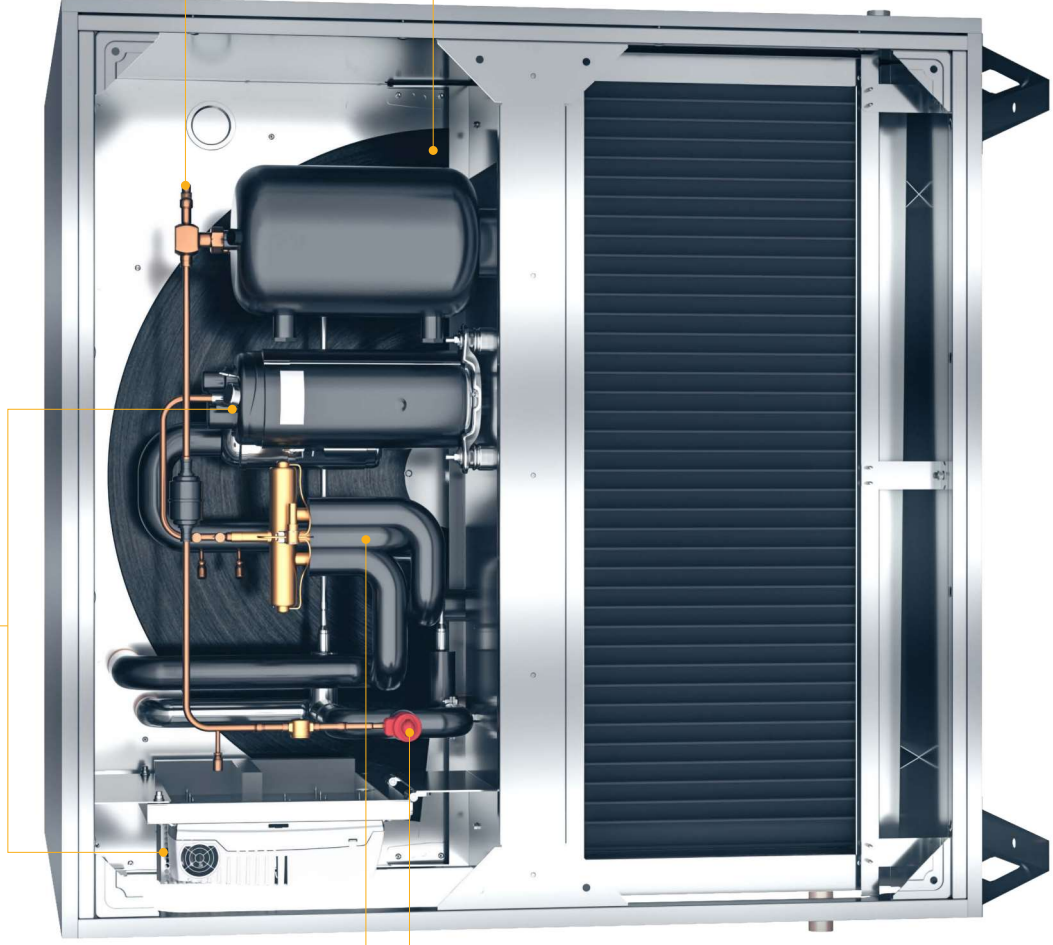

SUSPENDED UNITS

CASING

- » Panels filled with mineral wool, enclosed with steel sheet on both sides.
- » Casing parameters according to EN 1886: T2, TB3, L1, D1, F9.



MINI-PLEAT FILTERS

Air filters with extended high efficiency filtration surface.

- » Supply - EU7 (ePM2,5 65%)
- » Exhaust - EU5 (ePM10 50%)




EC MOTORS

Efficient, silent and low vibrations fan with electronically commutated motor in a IE4 class.




up to **93%** drive efficiency



ENERGY RECOVERY

- » Highly efficient counterflow hex recovery with by-pass.
- » Recovery efficiency reaching 93%



CONTROLS

Multifunctional controls, integrated with the unit – fully pre-configured and ready to run.

FLOOR-MOUNTED UNITS

CASING


- » Panels filled with mineral wool, closed with steel sheet on both sides.
- » Casing parameters according to EN 1886: T2, TB3, L1, D1, F9.




MINI-PLEAT FILTERS

High performance filters with wide active filtration cross-section.

- » Supply - EU7 (ePM2,5 65%)
- » Exhaust - EU5 (ePM10 50%)




up to **93%** drive efficiency




ENERGY RECOVERY

- » Highly efficient heat wheel driven by EC motor.
- » Recovery efficiency reaching 86%



CONTROLS

- » Multifunctional controls, integrated with the unit – fully pre-configured and ready to run.



ENERGY RECOVERY

- » Highly efficient counterflow hex recovery with by-pass.
- » Recovery efficiency reaching 93%



EC MOTORS

- » Efficient, silent and low vibrations fan with electronically commutated motor in a IE4 class.

VVS 005s-030s - SUSPENDED COMPACT UNITS

Nominal parameters	Recommended airflow range					
	VVS005s	VVS010s	VVS015s	VVS020s	VVS030s	
Unit size						
4 000						
3 000						
2 000						
1 000						
0						
Min airflow	Hex.005s	Hex.010s	Hex.015s	Hex.020s	Hex.030s	
Max airflow	150	300	450	600	900	
H	650	1 100	1 650	2 200	3 300	
W	400	400	400	490	490	
H ₁	395	575	775	805	1080	
W ₁	320	320	320	410	410	
W ₂	335	515	715	745	1020	
L	790	1 150	1 550	1 610	2 160	
l	30	30	30	30	30	


Dimension		Function version		Length of selected configurations	
	Counterflow hexagonal recuperator	1230	1500	1828	1828

Selected configurations	Dimension	Function version	Length of supply and exhaust compact units				
			V	FV	FH(hw)V	FH(e)V	FCV
	L	V	460	740	740	740	740
	L	FV	740	740	740	740	740
	L	FH(hw)V	740	740	740	740	740
	L	FH(e)V	1030	1030	1030	1030	1030
	L	FCV	860	860	860	860	860
	L	FG(de)V	1030	1030	1030	1030	1030
	L	FH(hw)CV	1030	1030	1030	1030	1030
	L	FH(hw)C(de)V	1230	1230	1230	1230	1230
	L	FH(e)CV	1030	1230	1230	1380	1380
	L	FH(e)C(de)V	1230	1380	1380	1450	1450



Entire range of configuration
in ClimaCAD OnLine 4 selection tool.
www.ccol4.com

DIMENSION - VVS 005s-030s - SUSPENDED COMPACT UNITS

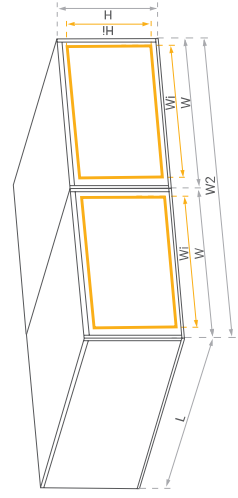

Duct fittings

Dimension [mm] W1 x H1 / D1	VVS005s	VVS010s	VVS015s	VVS020s	VVS030s
Flexible connection	305x288	485x288	685x288	730x375	1005x375
Air damper	305x288	485x288	685x288	730x375	1005x375
Rectangular spigot	300x310/300x300	510x510/400x350	710x810/400x350	740x400/500x400	1015x400/800x400
Round spigot	330x310/355	510x310/355	710x310/355	740x400/450	1015x400/450
Air inlets and outlets	335x318	515x318	715x318	745x408	1018x408


Length of additional air treatment functions

Selected configurations	Dimension	Function version	Length of selected configurations				
			VVS005s	VVS010s	VVS015s	VVS020s	VVS030s
	L	F9	180	180	180	180	180
	L	H(hw) (1R-2R)	180	180	180	180	180
	L	H(e)	370	370	370	370	370
	L	C (2R-4R)	370	370	370	370	370
	L	C(de) (2R-4R)	600	600	600	600	600
	L	H(hw)C	460	460	460	460	460
	L	H(e)C	740	740	740	740	740
	L	H(hw)C(de)	600	460	460	460	460
	L	H(e)C(de)	860	740	740	740	740
	L	E(e1)	370	460	460	460	460
	L	E(e2)	740	740	740	740	740

VVS 021c-150c - FLOOR MOUNTED COMPACT UNITS


DIMENSION - VVS 021c-150c - FLOOR MOUNTED COMPACT UNITS

Nominal parameters	Recommended airflow range									
	VVS021c	VVS030c	VVS040c	VVS055c	VVS075c	VVS100c	VVS120c	VVS150c		
Unit size	[m ² /h]									
16 000	[Bar chart]									
12 000	[Bar chart]									
8 000	[Bar chart]									
4 000	[Bar chart]									
0	[Bar chart]									
Min airflow	806	1 167	1 958	2 878	3 805	4 863	5 815	5 815		
Max airflow	2 310	3 300	4 400	6 050	8 250	11 000	13 200	16 500		
H _{fd}	90	90	90	90	90	90	90	90		
H	538	670	670	805	925	1 025	1 062	1 163		
W	967	967	1 174	1 345	1 486	1 666	1 897	2 091		
H ₁	368	500	500	635	755	855	892	993		
W ₁	887	887	1 094	1 265	1 406	1 586	1 817	2 011		
H ₂	986	1 250	1 250	1 520	1 760	1 960	2 034	2 236		
L	40	40	40	40	40	40	40	40		

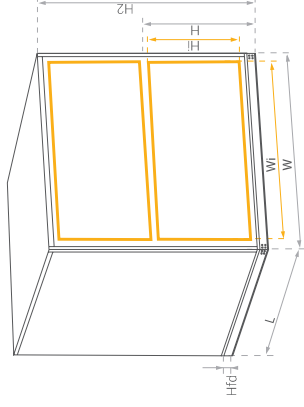

Size	WA	HA	WA1	HAT
VVS021c	821	313	70	67,5
VVS030c	821	440	70	70
VVS040c	1 028	440	70	70
VVS055c	1 199	575	70	70
VVS075c	1 340	695	70	70
VVS100c	1 520	795	70	70
VVS120c	1 751	852	70	70
VVS150c	1 945	933	70	70

Full face horizontal air inlet / outlet
END Full Front (FF) Full face air inlet / outlet

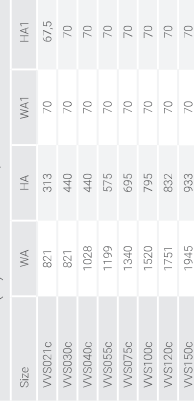

Lengths of additional air treatment functions

Selected configurations	Function version	Other configuration functions - typical lengths.									
		VVS021c	VVS030c	VVS040c	VVS055c	VVS075c	VVS100c	VVS120c	VVS150c		
V	F9	240	240	240	240	240	240	240	240	240	
H	H ₁ (hw) (1R2R)	370-710	370-710	370-710	310-630	310-630	310-630	310-630	310-630	310-630	
H	H ₁ (e)	370-710	370-710	370-710	310-630	310-630	310-630	310-630	310-630	310-630	
C	C (2R-4R)	370-710	370-710	370-710	450-790	450-790	450-790	450-790	450-790	450-790	
C	C (6R)	370-710	370-710	370-710	450-790	450-790	450-790	450-790	450-790	450-790	
H/C	H ₁ (hw)+C	710	710	710	790	790	790	790	790	790	
H/C	H ₁ (e)+C	710	710	710	790	790	790	790	790	790	
S	S(s3)	1 080	1 080	1 080	1 080	1 080	1 080	1 080	1 080	1 080	
E	E	550	550	550	630	630	630	630	630	630	

Dimension of base configuration

Selected configurations	L ₁	L ₂	L ₁	L ₂	L ₁	L ₂	L ₁	L ₂	L ₁	L ₂	L ₁	L ₂
[Diagram]	1240	1240	1240	1240	1240	1240	1240	1240	1240	1240	1240	1240
[Diagram]	1080	1080	1080	1080	1080	1080	1080	1080	1080	1080	1080	1080
[Diagram]	1080	1080	1080	1080	1080	1080	1080	1080	1080	1080	1080	1080
[Diagram]	2 230	2 230	2 230	2 230	2 230	2 230	2 230	2 230	2 230	2 230	2 230	2 230
[Diagram]	2 050	2 050	2 050	2 050	2 050	2 050	2 050	2 050	2 050	2 050	2 050	2 050
[Diagram]	180	180	180	180	180	180	180	180	180	180	180	180
[Diagram]	2 230	2 230	2 230	2 230	2 230	2 230	2 230	2 230	2 230	2 230	2 230	2 230
[Diagram]	2 050	2 050	2 050	2 050	2 050	2 050	2 050	2 050	2 050	2 050	2 050	2 050
[Diagram]	180	180	180	180	180	180	180	180	180	180	180	180
[Diagram]	2 230	2 230	2 230	2 230	2 230	2 230	2 230	2 230	2 230	2 230	2 230	2 230
[Diagram]	1 600	1 600	1 600	1 600	1 600	1 600	1 600	1 600	1 600	1 600	1 600	1 600
[Diagram]	2 500	2 500	2 500	2 500	2 500	2 500	2 500	2 500	2 500	2 500	2 500	2 500
[Diagram]	2 500	2 500	2 500	2 500	2 500	2 500	2 500	2 500	2 500	2 500	2 500	2 500



Entire range of configuration
in ClimaCAD OnLine 4 selection tool.
www.ccol4.com

COMPONENTS

DIRECT DRIVE PLUG FAN SET



Design and application

- » Single inlet, radial, backward curved, free running fan.
- » Impeller made of SAN (styrene/acrylonitrile) construction material with 20% glass fiber.
- » Direct drive – fan impeller installed directly on motor shaft.
- » Fan section consisting of single or multiple fans (fan array) in order to ensure optimum working parameters.

Specification

- » Low and medium pressure ventilation systems with fan static pressure not exceeding 2000 Pascals.
- » Maximum fan set working temperature: 60°C.

> EC MOTORS



- » Set of fan and motor mounted on common rail, fixed to the AHU fan diaphragm.
- » EC motors are Permanent Magnet motor, characterised by much higher efficiency vs traditional inductive AC motors.
- » EC motors (Electronically Commutated) – where mechanical commutator switching the windings has been replaced with electronic one.
- » Change of revolutions is done by means of changing the frequency rate of windings switching (rate or magnetic field rotating).
- » Highly inductive permanent magnets have applied in EC motors used by VTS, which enabled to achieve high torque at relatively small dimensions, together with reaching IE4 efficiency class.

- » Available Energy classes: IE4.
- » Rated voltage: EC motors of nominal capacity exceeding 0,75kW - 3x400V AC.
- » Rated voltage: EC motors of nominal capacity equal or less 0,75kW - 1x230V AC.
- » Motor winding insulation class: F.
- » Protection degree: IP54.
- » Maximum working ambient temperature: 55°C.
- » Lifespan:
 - 70 000 hours at load not exceeding 70% of nominal capacity at ambient temperature not exceeding 35°C.
 - 30 000 hours at 100% capacity load at ambient temperature not exceeding 55°C.

CASING > SUSPENDED COMPACT UNITS



Design and application

- » Casing structure made of „sandwich“ panels mounted to internal supporting structure.
 - » Panel thickness: 40 mm.
 - » Sheet thickness: Outer: 0.6 mm, Inner: 0.4 mm
 - » „Sandwich“ double skin panels made of mineral wool covered on both sides with sheet metal.
 - » Indoor application
 - » Inspection panels mounted on top and bottom of the unit (maintenance from bottom).
 - » Casing designed to be suspended above false ceilings, equipped with elements facilitating its installation.
- Specification**
- » Working temperature: (-40)°C ÷ (+60)°C.
 - » Panel thickness: 40mm.
 - » Thermal conductivity PPU $\lambda = 0,039$ W/mK.
 - » Casing fire resistance: A1 (EN 13162:2012 + A1:2015 (EN 13501-1))
 - » Moisture absorption:
 - short term: WS, Wp, ≤ 1 kg/m² (EN 13162:2012 + A1:2015 (EN 1609))
 - long term: Wl (P), Wlp, ≤ 3 kg/m² (EN 13162:2012 + A1:2015 (EN 12087))
 - » PPU density: $\rho = 80$ kg/m³.
 - » Corrosion protection:
 - Exterior: AZ150 (Aluzinc) coating, Coating thickness ≥ 150 g / m² with an additional organic coating.
 - Inside side: Coating Z140 (zinc), Coating thickness ≥ 140 g / m²
 - » Certified by Eurovent

CASING > FLOOR MOUNTED COMPACT UNITS



Design and application

- » Casing structure made of „sandwich“ panels mounted to internal supporting structure.
 - » Casing supported on base rails or blocks.
 - » Panel thickness: 40 mm.
 - » Sheet thickness:
 - Outer: 0.6 mm, Inner: 0.4 mm
 - » „Sandwich“ double skin panels made of mineral wool covered on both sides with sheet metal.
 - » Indoor and outdoor application.
 - » Inspection panels mounted on AHU side.
- Specification**
- » Working temperature: (-40)°C ÷ (+60)°C.
 - » Panel thickness: 40mm.
 - » Thermal conductivity PPU $\lambda = 0,039$ W/mK.
 - » Casing fire resistance: A1 (EN 13162:2012 + A1:2015 (EN 13501-1))
 - » Moisture absorption:
 - short term: WS, Wp, ≤ 1 kg/m² (EN 13162:2012 + A1:2015 (EN 1609))
 - long term: Wl (P), Wlp, ≤ 3 kg/m² (EN 13162:2012 + A1:2015 (EN 12087))
 - » PPU density: $\rho = 80$ kg/m³.
 - » Corrosion protection: - Exterior: AZ150 (Aluzinc) coating, Coating thickness ≥ 150 g / m² with an additional organic coating. - Inside side: Coating Z140 (zinc), Coating thickness ≥ 140 g / m²
 - » Certified by Eurovent

MINI PLEAT FILTERS



Design and application

- » Mini-pleat filters are special type of panel filters. They are design to provide many times larger active filtration surface followed by higher dust-holding capacity than typical panel ones, at the same outer filter cartridge dimensions. Filters consist of ultra-thin microfibers, coated with special, condensed binder. Mini-pleat are characterized by much longer life span the typical, commonly used ones.
- » Applied as initial or secondary stage of air filtration.


Specification

- » Max working temperature: (+70)°C, 100% RH1.
- Available filtration classes**
- » ISO ePM10 50% (ISO 16890) - M5 (EN779),
 - » ISO ePM2,5 65% (ISO 16890) - F7 (EN779),
 - » ISO ePM1 70% (ISO 16890) - F9 (EN779)*.

ROTARY HEAT WHEEL

Design and application

- » Rotor made of aluminum with shaft suspended on bearings, installed in steel housing.
- » Rotor filling – two layers of alternately winded aluminum foil – one flat, the other – corrugated – making small ducts for the air.
- » Rotor drive system with smooth revolutions control enabling to maintain highest recovery efficiency and to adjust degree of recovery performance.
- » Purge zone reducing the cross-contamination effect of contaminated exhaust air to supply to absolute minimum.
- » Set of gaskets installed both on the wheel outer edge and bar separating supply from exhaust air being an additional protection against cross-contamination.
- » Rotary heat wheel recovers sensible heat from return air to supply, which passes the unit in opposite direction. The process enables heat recovery in winter time, same as cool recovery in summer.
- » Humidity recovery from return to supply in case the rotor pad temperature is lower than dew point of return air – typically during winter season.

**Specification**

- » Up to 86% of energy recovery, depending on airflow rate and its velocity in the heat wheel window.

MIXIN SECTION

Design and application

- » Section equipped with two air inlets/outlets aided with dampers, enabling regulation of fresh and recirculation air share (recirculation).



WATER HEATER

Design and application

- » Block of copper pipes integrated with another block of aluminum fins, creating expanded heat exchange surface. Pipes are bonded to the collectors, equipped with headers (for connecting entire coil to the medium supply system).
- » Heating of the air supplied to the handled spaces.
- » Re-heating of the air as a part of air dehumidifying process.
- » The coil can be applied if heating medium is available (local boiler or district heating system).
- » Coil headers are equipped with medium damping valve and air vent.
- » Connecting the coil in parallel medium flow vs air, will result in its capacity reduction by over a dozen percent.

**Specification**

- » Max glycol concentration: 50%.
- » Max medium temperature: 150°C.
- » Max medium working pressure: 1,6MPa = 16bar (test: 21bar).
- » Heating capacity, parameter resulting from individual performance calculation of selected unit (CCOL).
- » Medium side pressure drop – parameter resulting from individual performance calculation of selected unit (CCOL).

COUNTERFLOW HEXAGONAL RECUPERATOR

Design and application

- » Hexagonal heat recovery recuperator made of crosswise stamped aluminum plates, between which supply and exhaust air passes alternately in counterflow arrangement.
- » As standard, the recuperator is equipped with by-pass damper, enabling its securing against frosting and heat recovery capacity regulation.
- » Optionally, the recuperator can be equipped with integrated mixing box.
- » The recuperator provides sensible heat recovery for warmer air to the colder one. For winter season – recovery of heat from return air to supply. For summer – recovery of chill from return air to supply.

**Specification**

- » Energy recovery at very high supply and exhaust air stream separation (reaching 99,9%).
- » Heat recovery reaching up to 93% depending on flow rate face velocity of the air passing the recuperator.

ELECTRIC HEATER

Design and application

- » Set of resistive heating elements made of CR-Ni-Fe alloy, 6 kW/400V each.
- » Coils mounted on hot-dip galvanized steel frame.
- » Heater is equipped with power terminals and thermostat protecting against overheating.
- » In case of AHU with complete controls, heater is equipped with integrated capacity control module.
- » Heating capacity can be modified by means of smooth regulation module (HE module, set of Solid State Relays as optional parts of AHU controls) or by means of automatic engaging of next heating sections.

**Specification**

- » Max permissible ambient temperature around heating elements: 65°C.
- » The heater is available in a version built in the air handling unit and in a duct heater version (without thermal insulation)

DIRECT EXPANSION COIL AS CONDENSER IN HEAT PUMP CIRCUIT

**Design and application**

- » Block of copper pipes integrated with another block of aluminum fins, creating expanded heat exchange surface. Pipes are bonded to the collectors, equipped with headers (for connecting entire coil to the cooling system circuit)
- » Heating of the air supplied to the handled spaces.
- » Re-heating of the air as a part of air dehumidifying process.

Specification

- » Max medium temperature: 60°C.
- » Max medium working pressure: 3,84MPa = 38,4bar (test: 50bar).
- » Heating capacity; parameter resulting from individual performance calculation of selected unit (CCOL).
- » Max refrigerant working pressure: 3,64 MPa = 38.4 bar (test: 50 bar).
- » Thermal power; parameter available from technical data of the unit (CCOL).
- » Pressure loss / medium flow: parameters available from technical data (CCOL).
- » Heat exchanger suitable for operation as a cooler (evaporator) and as a heater (condenser) in a heat pump circuit.

WATER COOLER


**Design and application**

- » A pack of copper tubes integrated with a pack of fins forming the heat exchange surface extension. The heat exchanger tubes are connected respectively to collectors, to which the connection pipes of the medium system are routed.
- » The exchanger connecting pipes are equipped with a drain and a vent respectively.

Features

- » Maximum glycol content 50%.
- » Minimum temperature for chilled water +2°C.
- » Maximum heating medium temperature: 150°C.
- » Max. refrigerant working pressure: 1.6 MPa = 16 bar (test: 21 bar).
- » Thermal power; parameter available from technical data of the unit (CCOL).
- » Pressure losses on the medium side: available in technical data generated in the COOL selection programme.
- » Connecting the exchanger supply in a parallel flow circuit reduces the heater power by up to several %.

DX COOLING COIL

**Design and application**

- » Block of copper pipes integrated with another block of aluminum fins, creating expanded heat exchange surface. Pipes are bonded to the collectors, equipped with headers (for connecting entire coil to the cooling system circuit).
- » DX cooler is also available as heater excusion (so called Condenser).
- » Cooling and dehumidifying of the air as a part of air complex dehumidifying process in summer season.
- » Coil usually applied for smaller cooling capacity systems vs water coolers or for individual air conditioning systems.

Specification

- » Min. Refrigerant evaporation temperature: +3°C.
- » Max refrigerant working pressure: 2,2MPa=22bar (test: 29 bar).
- » Cooling capacity - parameter resulting from individual performance calculation of selected unit (CCOL).

AIR DAMPER

**Design and application**

- » Blades made of aluminium with rubber gasket on the edges.
- » Aluminium frame.
- » Blades drive realized by means of gears made of composite material, installed on frame internal side.
- » Damper is equipped with square pivot, fitted for actuator (dampers of cross section greater than 4 m² have 2 linked pivots).

Specification

- » Air leakage at closed damper: 50m³/h·m² - at 100 Pascals of pressure difference.
- » Workint temperature range: -40 ÷ +70°C.

FLEXIBLE CONNECTION


**Design and application**

- » Flexible connection made of 1 mm thick and 30 mm wide hot-dip galvanized steel profiles and polyester fabric coated with PVC.
- » Flame resistance: UL 94 - HB [ISO 1210].
- » Flexible connection resistant to UV radiation
- » Working temperature range: -30°C do +70°C.
- » Max connection length (fully spread position): 110 mm.
- » Flexible connection installed on each AHU/Duct joint eliminates transfer of possible AHU vibrations to the ventilation ductwork.

Specification

- » Max air face velocity: 5m/s.
- » Working conditions: -40 ÷ +70°C.

ADVANCED CONTROL

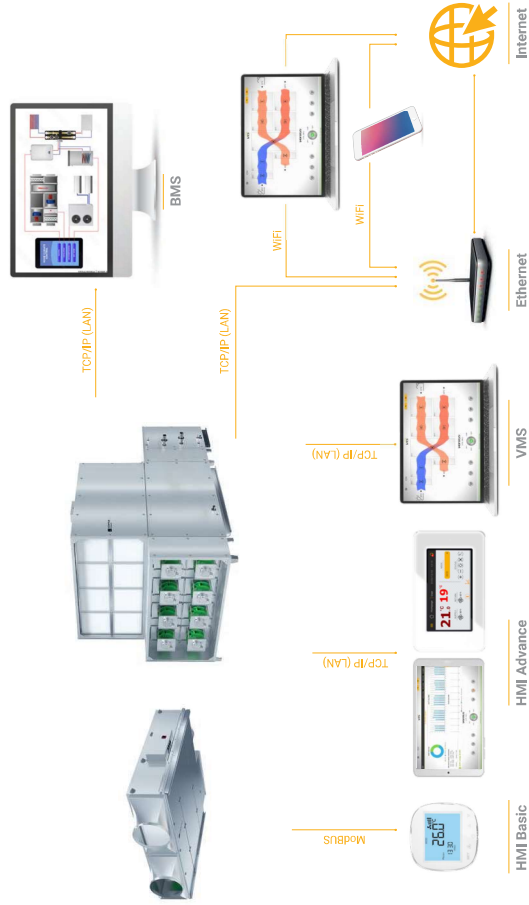

Automatic air quality control function

VTS offers the optimization of energy consumption, based on step-less, automatic adaptation of air efficiency to the needs of heating, cooling and ventilation. This adaptation is based on ensuring proper air quality - temperature, CO₂, humidity.

Three different operating modes

The user can choose one of three individual operating modes: Eco, Optimum and Comfort. Each of these modes offers individual performance parameters: main adjustment setting, e.g. temperature in the room, humidity, CO₂ level or air flow value, etc.

AHU operation calendar

VTS automation offers the possibility of programming a weekly AHU operating schedule, taking into account special days (official celebrations, holidays, days off, etc.). For each time interval, it is possible to program one of three operating modes. A graphic presentation of the user-configured schedule using visual tools is also available.

Simulation of air handling unit operation

A function is available to simulate the savings due to the application of specific functionalities, and function of simulation of working parameters of particular components.



Advanced control algorithms - cost minimization

VTS algorithms apply cascading regulation of room temperature, which ensures minimum consumption of heat and process cold. Moreover, control algorithms ensure precise maintenance of the preset room temperature with zero hysteresis.

Economic adaptation of fan capacity parameters to the needs of the building


Algorithms of fan efficiency control were applied through electronic measurement and automatic regulation of air efficiency expressed in m³/h - so called CAV and VAV system.

HMI Basic

The AHU is operated from a control panel with a simple service interface, which prevents any unauthorized change of the advanced operating settings of the AHU. HMI Basic is also a combination of a temperature and humidity sensor with a control panel, all in one housing.

HMI Advanced

Dedicated tablet, with Android system and Chrome browser, ensuring convenience in management and configuration of device parameters. The user receives a device for configuring and parametrizing the VENTUS air handling unit, a compilation of documents, a set of information about the product, and access to the monitoring and visualization of operating parameters of devices in the same network.

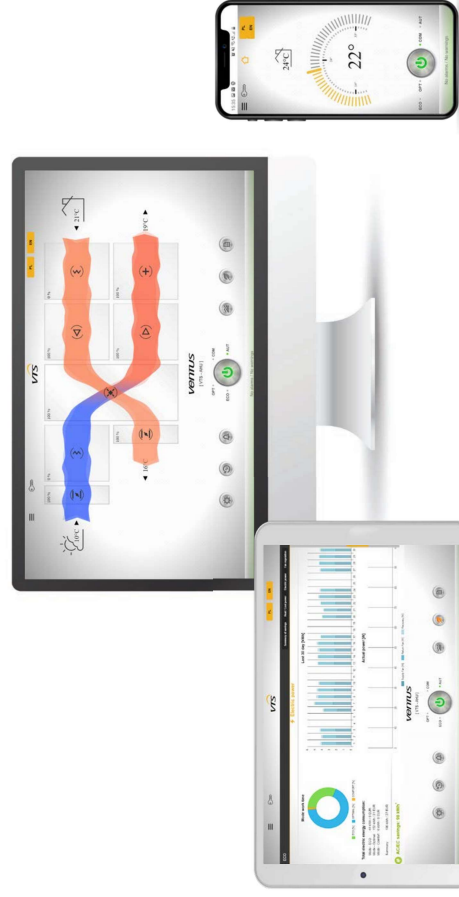

REMOTE MONITORING AND MANAGEMENT OF THE OPERATING PARAMETERS OF THE UNIT IN REAL TIME

VTS provides a standard automation functionality in the form of a factory-implemented **VMS (Ventus Management System)** application for remote monitoring, with visualization and management of the operating parameters of the units in real time via a web browser on any device.

VISUALIZATION - presentation in the form of charts for all operating parameters of all ventilation units operating within a common network.


DIAGNOSTICS - this function facilitates remote diagnostics and remote support by the service personnel.

CONVENIENCE - possibility of starting the unit via a web browser on any device, remote access and remote change of parameters via a local area network or the Internet.

OPTIMIZATION - the operating parameters for each functional unit can be optimized.

ECONOMY - measurement and recording of current operating costs. Possibility of defining currencies and utility prices.

RECORDING - recording of all AHU operating parameters and alarms and warnings, including a legible description.

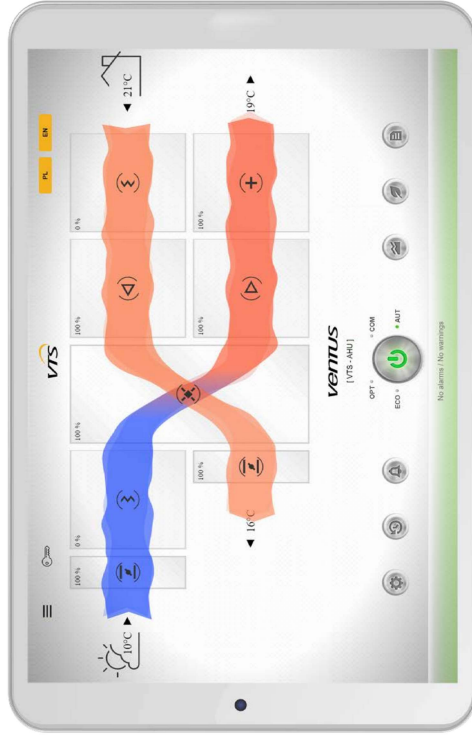

MAIN SCREEN

The main screen includes a graphic diagram of the air handling unit, with clearly marked air conditioning functions and current settings and parameters.

The window also includes a set of buttons offering a wide spectrum of AHU management functions. The complete window can be treated as a main navigation panel of the AHU management window. From this panel, the user can monitor the status of the AHU, switch operating modes or navigate to any of the additional functions.

The AHU diagram combines a series of functions, such as displaying the status of each function in your unit - informing the user about possible alarms directly on the applicable AHU block. The user can also monitor the parameters of air flowing into the unit and conditioned by the unit.


SCHEDULE

An air handling unit operating according to a predefined schedule is a known solution for control applications.

However, what is new is the ease, with which the user can manage schedule settings directly on the diagram - using both standard computer screen and a mouse and a touch screen on a tablet.

The schedule is designed as a series of scroll bars for individual operating modes.

All display items are displayed on a time diagram. Using the scroll bars, the user can change the schedule of their AHU, improve the economics of the ventilation system, all within seconds.

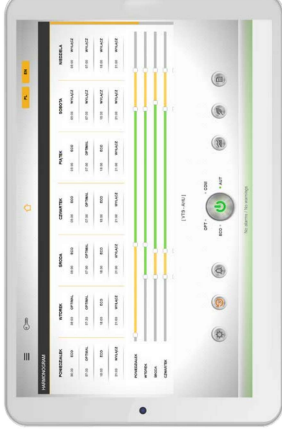

CHARTS

Charts are a tool used for recording all operating parameters of the AHU, saving them and displaying historical AHU operating data in the form of a time chart. This tool was created to help the user to develop the best AHU operation schedule, ideally suited to the specific nature of a given ventilation system, as well as to improve the economics of operation of the system and fulfill the user's preferences.



ECO

The ECO function is used for calculating the savings generated through heat recovery, the application of high-performance EC fans and management of the complete device applying state of the art algorithms developed by VTS.

All the user needs to do is spend a few minutes to inform the application about the cost of each energy carrier used - expressed in any currency. In return, the application will report all savings expressed in kW and money.

Depending on the preference, the user can monitor the common savings generated through heat recovery, the application of high-performance EC fans and advanced VTS control algorithms, or display a report on a separate, very detailed diagram.




CONTROLS

VENTUS COMPACT AIR HANDLING UNITS IN PLUG&PLAY STANDARD

- Savings**
- Comfort**
- Safety**

Ventus Compact – range of floor-mounted units with rotary heat wheel and suspended with hexagonal recuperator. Equipped with complete, factory mounted controls, pre-configured in accordance to actual selection and ready to run just after connecting to mains.

Controls is capable to regulate all user parameters: air temperature, its humidity, maximum permissible CO₂ concentration and the flow rate. Also, controls support preventive and securing functions like protection of the water heater against freezing or energy recovery system against icing, protection of motors against overloading, monitoring of air filters actual status of contamination and many other. Applied algorithms can optimize performance of all air treatment components in order to minimize consumption of all energy media supplied to the unit. The system includes control and power supply circuits:

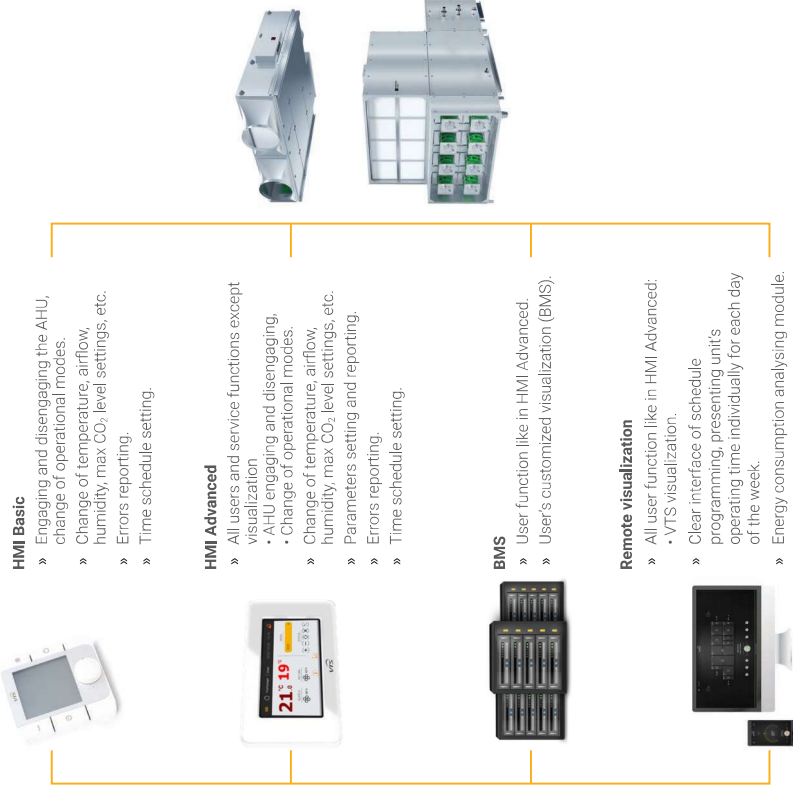

PAREMETERS REGULATION FUNCTIONS

Temperature and humidity regulation


- » Regulation of supply, return air temperature and humidity in handled spaces.
- » Control of water coils valves (heater, cooler) and condensing unit.
- » Control of rotary heat wheel revolutions and mixing box (Ventus floor-mounted Compact units), bypass-damper of hexagonal counterflow energy recovery system (suspended VENTUS Compact units).

Airflow rate regulation

- » Constant Air Volume (CAV) available as standard
- » Constant static pressure maintenance in trunk duct (Variable Air Volume – VAV) available as option.
- » Getting of constant revolutions for each fan individually – VFD setting for AC motors or constant revolutions percentage in case of EC motors.

CO₂ regulation

- » By means of mixing box – for units with air recirculation.
- » By means of airflow rate change – for all types of supply and exhaust units (function can be engages together with mixing box control).

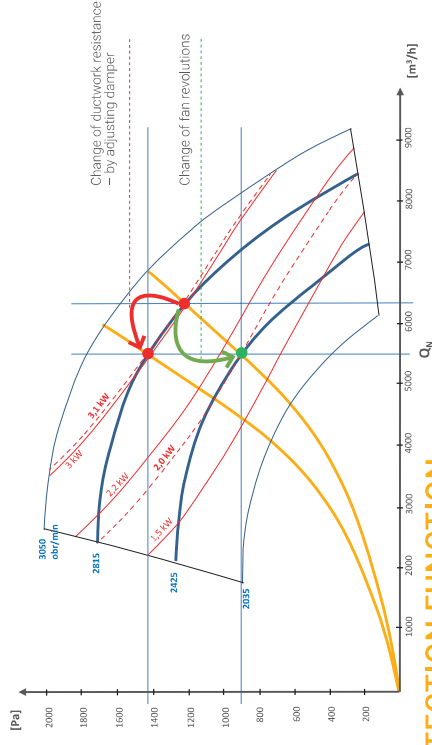

PROTECTION FUNCTION

- » Protection against rotary heat wheel icing (VENTUS Compact floor mounted units), by means of wheel revolutions reduction.
- » Protection against hexagonal counterflow recuperator icing (VENTUS Compact suspended units) by means of by-pass damper opening.
- optimizing of icing protection function by change of minimum return air temperature threshold downstream the energy recovery unit vs return air parameters,
- minimizing of recovery efficiency drop during defrosting.
- » Anti-freezing protection of water heater.
- antifreeze thermostat installed downstream the heater,
- strap-on return water temperature sensor
- » Fans overload protection (functions realized by EC motors drives)
- » Fire alarm input – AHU immediate disengaging in case of lack of external start permission from overall fire protection system.

TIME SCHEDULE FUNCTIONS

- » Weekly schedule operational modes programming.
- » Clear visualization of schedule settings by means of web-browser (computers and mobile devices).



PREVENTIVE FUNCTIONS

- » Constant filter contamination status control:
 - constant monitoring of filter pressure drop by means of static pressure transducers,
 - evaluation of filter contamination status for vs actual airflow rate.
- » Fans shutting-down delay – fans run out for systems with electric heater.
- » Water heater pre-heating before fan's start up
- » Periodical heater pump engaging in summer – to prevent against limescale accumulation.

CONTROL CIRCUITS

- » All control circuits installed inside the base unit are fully wired and configured in accordance to its technical selection.
- » Control of fans operation is done by means of digital communication based using ModBUS protocol. Each of the fan is adequately programmed with individual address enabling its recognition by the control system (fans should never be swapped).
- » Control elements handling external modules (antifreeze thermostat of the water heater, valves for heater and cooler, supply air temperature sensor) should be connected to terminal block.
- » Clear and easy to ready description of terminal block facilitates correct connecting of control peripheral components.



POWER SUPPLY AND PROTECTION CIRCUITS

- » Fan's power supply, rotary heat wheel and control circuits are fully wired.
- » All electrical protection circuits of fans, rotary heat wheel drive, control circuits and water heater pump are installed inside the AHU.
- » The only to be by the user is connecting the AHU to mains (to the main switch located in the connecting box) and optionally – crossing the power supply to the pump of the water heater.
- » Water heater power supply terminals are crossed to the terminal block located on AHU outer wall.



CONTROL ELEMENTS

CONTROL ELEMENTS

Functions and application

- » Regulation of supply and exhaust air temperature.
- » Protection of the energy recovery unit against freezing.
- » Outdoor air temperature measurement in order to identify need of heat/chill recovery and engagement protecting function for water heater.



ROOM AIR TEMPERATURE SENSOR

Functions and application

- » Regulation of temperature in handled space.



ANTI-FREEZE THERMOSTAT

Functions and application

- » Protection of water heater against freezing by means of air off-coil temperature monitoring (recommended temperature threshold setting: +5°C).



OVERHEAT PROTECTION THERMOSTATE FOR ELECTRIC HEATER

Functions and application

- » Protection of electric heater against overheating.



DIFFERENTIAL PRESSURE SWITCH

Functions and application

- » Monitoring of filter's contamination.
- » Control of the operation of a direct driven fan unit in case of cooperation with electric heater.



DIFFERENTIAL PRESSURE TRANSDUCER

Functions and application

- » Regulation of supply and exhaust air (CAV function).
- » Regulation of static pressure in ventilation system/trunk duct (VAV function).
- » Constant monitoring of filter pressure drop (control of filter contamination level).



ON/OFF DAMPER ACTUATOR

Functions and application

- » Airflow opening or closing in the AHU (connectors of air intake and discharge) – for units with water heater actuators with return spring are applied.



SET FOR WATER HEATER CAPACITY REGULATION (PUMP GROUP)

Functions and application

- » Smooth regulation of water heater capacity.



Operational parameters

- » Regulation mode: 0 to 100% (smooth).
- » Control signal: 0-10V.
- » Full open/close time: 90 s.
- » Valve supply voltage: 24V AC/DC.
- » Pump supply voltage: 230V AC.
- » Working temperature: +5°C do 50°C.
- » Medium temperature range: -10°C to 120°C.
- » Max glycol concentration: 50%.
- » Protection degree: IP 54.

Operational parameters

- » Measurement range: -50°C to +90°C.
- » Measurement accuracy: ±0,5K.
- » Sensor type: NTC 10K.
- » Air humidity range: 5 ÷ 100%.
- » Protection degree: IP67.
- » Shielded cable length: max. 100 m.

Operational parameters

- » Measurement range: -20°C do +70°C.
- » Measurement accuracy: ±0,5K.
- » Sensor type: NTC 10K.
- » Air humidity range: 5 ÷ 95% no condensation.
- » Protection degree: IP20.
- » Shielded cable length: max. 100 m.

Operational parameters

- » Measurement range: -18 ÷ +15°C.
- » Hysteresis: 1,7 ÷ 12K.
- » Nominal voltage: 30V DC or 230V AC.
- » Output signal: potential-free contact.
- » Protection degree: IP 44.

Operational parameters

- » Power out-off temperature setpoint: 65°C.
- » Power re-switch on temperature setpoint : 45°C.
- » Nominal voltage: 20V DC or 230V AC.
- » Output signal: potential-free contact.



THREE-WAY VALVE FOR WATER HEATER OR COOLER



Functions and application

- » Smooth regulation of water heater or cooler capacity.

Operational parameters

- » Regulation mode: 0 do 100% (smooth).
- » Control signal: 0-10V.
- » Full open/close time: 90 s.
- » Valve supply voltage: 24V AC/DC.
- » Working temperature: +5°C do 50°C.
- » Medium temperature range: -10°C do 120°C.
- » Max glycol concentration: 50%.
- » Protection degree: IP 54.

HMI BASIC USER INTERFACE



Functions and application

- » Maintenance of Air handling unit – temperatures setting and reading, change of operating modes, independent time schedule management, alarm codes displaying.
- » Configuration of controller's universal inputs and outputs.

Operational parameters

- » Power supply directly from the controller.
- » Communication with controller – RS485 serial port.
- » Max length of communication cable: max. 500 m.
- » Working temperature: -20°C to 60°C.
- » Humidity: <85% (no condensation).
- » Protection degree: IP 31.

HMI ADVANCED USER INTERFACE



Functions and application

- » Maintenance of Air handling Unit – parameters setting and reading (temperature, airflow, CO2, humidity etc), change of operational modes.
- » Weekly schedule programming.
- » Service maintenance – configuration of all advanced AHU operating parameters, configuration controllers universal inputs and outputs.
- » Remote configuring of variable frequency drives.
- » AHU alarms and errors monitoring (full text description) and cancelling.

Operational parameters

- » Power supply directly from the controller.
- » Communication with controller – RS485 serial port.
- » Max length of communication cable: max. 1200 m.
- » Working temperature: -20°C to 60°C.
- » Humidity: <85% (no condensation).
- » Protection degree: IP 20.

HMI ADVANCED OPERATOR PANEL




Function and application

- » HMI Advanced is a dedicated tablet with the Android system and the Chrome browser, which provides comfort in managing and configuring the parameters of the device.


- » The user receives a device for configuring and parametrizing the VENTUS air handling unit, a compilation of documents, a set of information about the product, and access to the monitoring and visualization of operating parameters of devices in the same network. The 10-inch high resolution display provides comfort of reading all data.
- » The HMI Advanced tablet comes with a communication box.
- » The tablet is mounted to the box using a set of magnets for easy attaching and detaching.
- » The communication box includes a WiFi router for wireless communication with the tablet, and a power supply unit for connecting the tablet. This solution allows the remote use of the tablet within WiFi range.

Operational parameters

- » Micro USB connector
- » Power supply input: 100-240V 50-60 Hz
- » Tablet input: 5.0V - 2.0A
- » Operation temperature: 0°C to 40°C.
- » Humidity: <85% (non-condensing).
- » OS: Android 9
- » Screen: 10.1"
- » Wifi: 802.11a/c/b/g/n
- » 2G: GPRS class 12/EDGE
- » 3G: HSPA+, EVDO, GPRS EDGE;
- » 4G: TDD LTE FDD LTE, VoLTE
- » Bluetooth: 4.2, VoLTE
- » Battery: 8000 mAh
- » GSM: B2/3/5/8
- » CDMA1X: BC0
- » WCDMA: B1/2/5/8

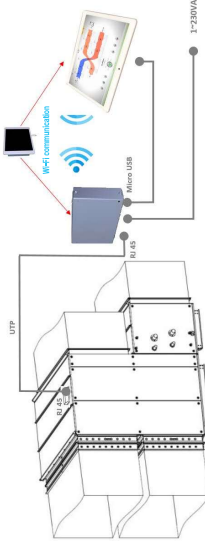


Single AHU connected to tablet

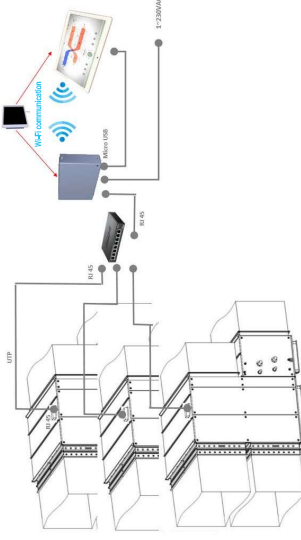

Multiple AHUs connected to single tablet



CODING

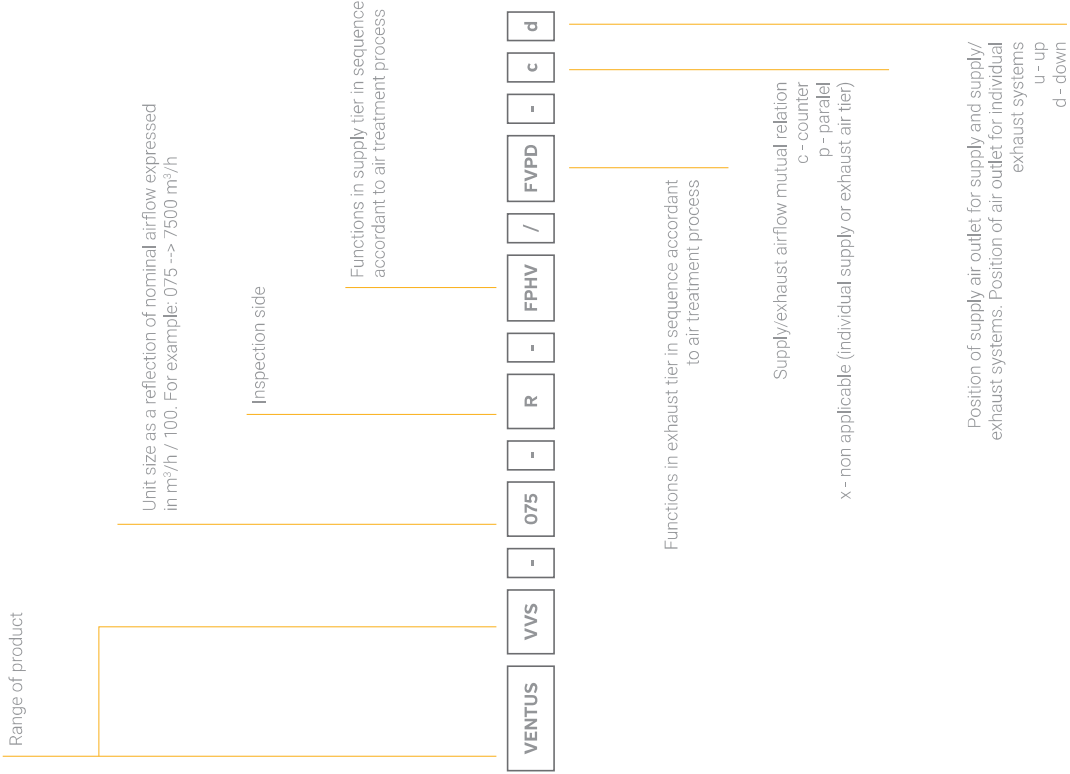

CODES & SYMBOLS

CODE	SYMBOL	NAME
F	Σ	Air filter
V	Δ	Fan
C	⊖	Cooler
H	⊕	Heater
M	⊗	Mixing box
P	⊗	Plate cross-flow recuperator
R	⊙	Rotary heat wheel
G	⊙	Run-around coil
D	⊙	Droplet eliminator
W	⊙	Humidifier
E	□	Additional empty space
S	⊓	Sound attenuator

Auxiliary codes

- (cw) water cooler
- (dx) direct expansion cooler
- (XR) coil number of rows
- (hw) water heater
- (el) electric heater
- (sx) sound attenuator version

VVS075-R-FPHV/VVS075-L-FVPD_CD



06

VOLCANO
WING
WING PRO

VOLCANO

Product range



	VR Mini	VR-D Mini	VR1	VR2	VR3	VR-D
Type	AC/EC	AC/EC	AC/EC	AC/EC	AC/EC	AC/EC
Heating power range	3-20 kW	-	5-30 kW	8-50 kW	13-75 kW	-
Maximum air output	2100 m ³ /h	2330 m ³ /h	5300 m ³ /h	4850 m ³ /h	5700 m ³ /h	6500 m ³ /h
Horizontal range (max.)	14 m	16 m	23 m	22 m	25 m	28 m
Vertical range (max.)	8 m	10 m	12 m	11 m	12 m	15 m
Electricity consumption*	13-91 W	13-91 W	41-202 W	45-226 W	55-355 W	55-355 W

* EC motor power for the above specified fan outputs

Technical parameters

Parameter	Unit	VR Mini		VR1		VR2		VR3		VR-D		VR-D Mini	
		AC	EC	AC	EC	AC	EC	AC	EC	AC	EC	AC	EC
WTS article No.		1-4-0101-0445	1-4-0101-0455	1-4-0101-0446	1-4-0101-0442	1-4-0101-0447	1-4-0101-0443	1-4-0101-0448	1-4-0101-0444	1-4-0101-0449	1-4-0101-0450	1-4-0101-0506	1-4-0101-0498
Number of heater rows	-	2	1	1	2	2	3	3	3	3	3	3	3
Maximum air output	m ³ /h	2100	5300	5300	4850	4850	5700	6500	5700	6500	2200	2330	2330
Heating power range	kW	3-20	5-30	5-30	8-50	8-50	13-75	13-75	13-75	13-75	13-75	13-75	13-75
Maximum temperature of the heating medium	°C				130								
Maximum working pressure	MPa			1.6									
Water capacity	dm ³	1,12	1,25	2,16	3,1								
Connection pipes diameter	"			3/4									
Device weight (without water)	kg	13	14	21	21,5	21,5	25,5	24,5	18	15,5	10,6	8	
Power supply voltage	V/Hz			1-230/50									
Motor power	kW	0,115	0,095	0,28	0,25	0,28	0,25	0,45	0,37	0,45	0,37	0,115	0,095
Rated current	A	0,53	0,51	1,3	1,3	1,95	1,7	1,95	1,7	1,95	1,7	0,53	0,51
Rated motor rotational speed	rpm	1450	1200	1380	1430	1380	1430	1380	1400	1380	1400	1450	1200
Motor protection level	IP			54									
Casing color/palette				Front: RAL 9016 Traffic White, rear + console: RAL 7036 Platinum Grey, fan (EC): RAL 6038 Green									

PIPELINE DIAMETERS*

Number of heaters connected to one manifold	Max. water flow (m ³ /h)	VR Mini		VR1		VR2		VR3		VR-D		VR-D Mini	
		Max. water flow (m ³ /h)	Pipeline diameter (")	Max. water flow (m ³ /h)	Pipeline diameter (")	Max. water flow (m ³ /h)	Pipeline diameter (")	Max. water flow (m ³ /h)	Pipeline diameter (")	Max. water flow (m ³ /h)	Pipeline diameter (")	Max. water flow (m ³ /h)	Pipeline diameter (")
1	0,9	3/4	3/4	1,3	3/4	2,2	3/4	3,3	3/4	3,3	3/4	3,3	3/4
2	1,8	3/4	3/4	2,6	3/4	4,4	1	6,6	1,1/4	6,6	1,1/4	6,6	1,1/4
3	2,7	1	1	3,9	1	6,6	1,1/4	9,9	1,1/4	9,9	1,1/4	9,9	1,1/4
4	3,6	1	1	5,2	1	8,8	1,1/4	13,2	1,1/4	13,2	1,1/4	13,2	1,1/4
5	4,5	1	1	6,5	1,1/4	11	1,1/2	16,5	2	16,5	2	16,5	2
6	5,4	1,1/4	1,1/4	7,8	1,1/4	13,2	1,1/2	19,8	2	19,8	2	19,8	2
7	6,3	1,1/4	1,1/4	9,1	1,1/4	15,4	2	23,1	2	23,1	2	23,1	2
8	7,2	1,1/4	1,1/4	10,4	1,1/2	17,6	2	26,4	2	26,4	2	26,4	2
9	8,1	1,1/4	1,1/2	11,7	1,1/2	19,8	2	29,7	2	29,7	2	29,7	2
10	9,0	1,1/4	1,1/2	13	1,1/2	22	2	33	3	33	3	33	3

Controls



PARAMETERS Model	Wall controller VOLCANO	VR Thermostat	Speed regulator ARW 3.0/2	Speed regulator ARW 0.6	Potentiometer VR EC (0-10V)	Potentiometer with thermostat VR EC (0-10V)	HMI VOLCANO EC controller	Controller WING EC WIFI
WTS product number	1-4-0101-0438	1-4-0101-0438	1-4-0101-0434	1-4-0101-0167	1-4-0101-0453	1-4-0101-0473	1-4-2601-0157	1-4-2801-0156
Motor support		AC					EC	
Power supply voltage	~230/1/50	~230/1/50	~230/1/50	~230/1/50	~230/1/50	~230/1/50	~230/1/50	~230/1/50
Permissible load current	6(3)	3	3	0,6	0,07 A for 0-10V	0,02 A for 0-10V	1A for 230VAC 0,02A for 0-10V	1A for 230VAC 0,02A for 0-10V
Settings range	10...30	10...30	10...30	10...30	5...30	5...40	5...40	5...40
Work mode	manual	manual	manual	manual	manual	manual/automatic	manual/automatic	manual/automatic
Hourly-weekly calendar	No	No	No	No	No	No	Yes	Yes
Clock	No	No	No	No	No	No	Yes	Yes
Temperature measurement	---	---	---	---	---	---	Integrated in the device	Integrated in the device
The possibility of connecting a separate temperature sensor	---	---	---	---	---	---	No	1 or 4
Output signal	---	---	on/off	---	---	---	0-10 V DC	1 or 4
Protection rate	IP 30	IP 30	IP 54	IP 30	IP 30	IP 30	IP 20	IP 20

COOPERATION OF CONTROLS AND REGULATORS WITH HEATING UNITS

VR Mini/ VR-D mini	4	1	4	1	8
VR1/ VR2	2	1	1	0	8
VR3/ VR-D	1	1	1	0	8

Accessories



Valve with actuator

WTS article No.	1-2-1004-2019
power supply voltage	V/Hz ~230/1/50
Power consumption electrical	W 1
connection	3/4
Coefficient of volume opening/ closing time	m ³ /h min. 4,5
protection rating	IP 3/3
	IP 54



Room NTC sensor (for the HMI VOLCANO EC controller)

WTS article No.	1-2-1205-0007
resistance measurement element	kΩ NTC 10k
assembly	--- surface-mounted
max. signal wire length	m 100
ambient temperature	°C -20...+70
zakes pomina temperature	°C -20...+70
protection rating	IP 66



Flex. connecting hoses (set)

WTS article No.	1-2-2702-0076
length	m 0,6-0,9
connection type	GW/GW 3/4"
max. fluid pressure	MPa 1,6
min. working temperature (or water)	°C 5
min. working temperature (or glycol)	°C -20
max. working temperature	°C 130
set includes	hose (2 pcs) gasket (4 pcs)



WING

Product range

WING W

WATER HEAT EXCHANGER
HEATING POWER RANGE:
4 - 47 kW
EXHAUST FLOW RAT:
1850-4400 m³/h
MAXIMUM AIR COVERAGE:
3,7 m

WING E

ELECTRIC HEATER
HEATING POWER RANGE:
2 - 15 kW
EXHAUST FLOW RAT:
1850-4500 m³/h
MAXIMUM AIR COVERAGE:
3,7 m

WING C

WITHOUT HEAT EXCHANGER (AMBIENT)
EXHAUST FLOW RATE:
4 m
EXHAUST FLOW RAT:
1950-4600 m³/h



* width does not include side covers

HORIZONTAL INSTALLATION




VERTICAL INSTALLATION




Stream range

Vertical air stream range (maximum installation height)

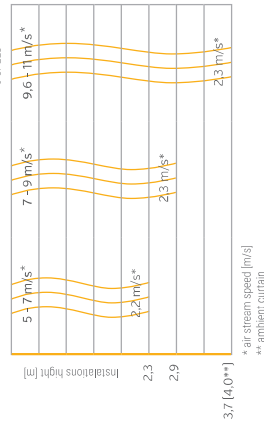

Horizontal air stream range (for vertical installation)

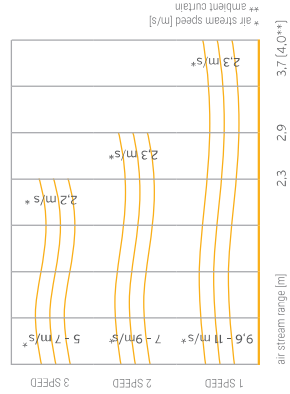

Technical parameters

PARAMETERS	WATER AIR CURTAIN			ELECTRIC AIR CURTAIN			AMBIENT AIR CURTAIN			
	W1700	W150	W200	E100	E150	E200	C100	C150	C200	
Colour	AC	EC	AC	AC	EC	AC	AC	EC	AC	EC
Colour	W1700-0250	W1700-0250	W1700-0250	E100-0311	E100-0311	E100-0311	C100-0250	C100-0250	C100-0250	
Colour	W1700-0252	W1700-0252	W1700-0252	E100-0312	E100-0312	E100-0312	C100-0251	C100-0251	C100-0251	
Colour	W1700-0253	W1700-0253	W1700-0253	E100-0313	E100-0313	E100-0313	C100-0252	C100-0252	C100-0252	
Colour	W1700-0254	W1700-0254	W1700-0254	E100-0314	E100-0314	E100-0314	C100-0253	C100-0253	C100-0253	
Colour	W1700-0255	W1700-0255	W1700-0255	E100-0315	E100-0315	E100-0315	C100-0254	C100-0254	C100-0254	
Colour	W1700-0256	W1700-0256	W1700-0256	E100-0316	E100-0316	E100-0316	C100-0255	C100-0255	C100-0255	
Colour	W1700-0257	W1700-0257	W1700-0257	E100-0317	E100-0317	E100-0317	C100-0256	C100-0256	C100-0256	
Colour	W1700-0258	W1700-0258	W1700-0258	E100-0318	E100-0318	E100-0318	C100-0257	C100-0257	C100-0257	
Colour	W1700-0259	W1700-0259	W1700-0259	E100-0319	E100-0319	E100-0319	C100-0258	C100-0258	C100-0258	
Colour	W1700-0260	W1700-0260	W1700-0260	E100-0320	E100-0320	E100-0320	C100-0259	C100-0259	C100-0259	
Colour	W1700-0261	W1700-0261	W1700-0261	E100-0321	E100-0321	E100-0321	C100-0260	C100-0260	C100-0260	
Colour	W1700-0262	W1700-0262	W1700-0262	E100-0322	E100-0322	E100-0322	C100-0261	C100-0261	C100-0261	
Colour	W1700-0263	W1700-0263	W1700-0263	E100-0323	E100-0323	E100-0323	C100-0262	C100-0262	C100-0262	
Colour	W1700-0264	W1700-0264	W1700-0264	E100-0324	E100-0324	E100-0324	C100-0263	C100-0263	C100-0263	
Colour	W1700-0265	W1700-0265	W1700-0265	E100-0325	E100-0325	E100-0325	C100-0264	C100-0264	C100-0264	
Colour	W1700-0266	W1700-0266	W1700-0266	E100-0326	E100-0326	E100-0326	C100-0265	C100-0265	C100-0265	
Colour	W1700-0267	W1700-0267	W1700-0267	E100-0327	E100-0327	E100-0327	C100-0266	C100-0266	C100-0266	
Colour	W1700-0268	W1700-0268	W1700-0268	E100-0328	E100-0328	E100-0328	C100-0267	C100-0267	C100-0267	
Colour	W1700-0269	W1700-0269	W1700-0269	E100-0329	E100-0329	E100-0329	C100-0268	C100-0268	C100-0268	
Colour	W1700-0270	W1700-0270	W1700-0270	E100-0330	E100-0330	E100-0330	C100-0269	C100-0269	C100-0269	
Colour	W1700-0271	W1700-0271	W1700-0271	E100-0331	E100-0331	E100-0331	C100-0270	C100-0270	C100-0270	
Colour	W1700-0272	W1700-0272	W1700-0272	E100-0332	E100-0332	E100-0332	C100-0271	C100-0271	C100-0271	
Colour	W1700-0273	W1700-0273	W1700-0273	E100-0333	E100-0333	E100-0333	C100-0272	C100-0272	C100-0272	
Colour	W1700-0274	W1700-0274	W1700-0274	E100-0334	E100-0334	E100-0334	C100-0273	C100-0273	C100-0273	
Colour	W1700-0275	W1700-0275	W1700-0275	E100-0335	E100-0335	E100-0335	C100-0274	C100-0274	C100-0274	
Colour	W1700-0276	W1700-0276	W1700-0276	E100-0336	E100-0336	E100-0336	C100-0275	C100-0275	C100-0275	
Colour	W1700-0277	W1700-0277	W1700-0277	E100-0337	E100-0337	E100-0337	C100-0276	C100-0276	C100-0276	
Colour	W1700-0278	W1700-0278	W1700-0278	E100-0338	E100-0338	E100-0338	C100-0277	C100-0277	C100-0277	
Colour	W1700-0279	W1700-0279	W1700-0279	E100-0339	E100-0339	E100-0339	C100-0278	C100-0278	C100-0278	
Colour	W1700-0280	W1700-0280	W1700-0280	E100-0340	E100-0340	E100-0340	C100-0279	C100-0279	C100-0279	
Colour	W1700-0281	W1700-0281	W1700-0281	E100-0341	E100-0341	E100-0341	C100-0280	C100-0280	C100-0280	
Colour	W1700-0282	W1700-0282	W1700-0282	E100-0342	E100-0342	E100-0342	C100-0281	C100-0281	C100-0281	
Colour	W1700-0283	W1700-0283	W1700-0283	E100-0343	E100-0343	E100-0343	C100-0282	C100-0282	C100-0282	
Colour	W1700-0284	W1700-0284	W1700-0284	E100-0344	E100-0344	E100-0344	C100-0283	C100-0283	C100-0283	
Colour	W1700-0285	W1700-0285	W1700-0285	E100-0345	E100-0345	E100-0345	C100-0284	C100-0284	C100-0284	
Colour	W1700-0286	W1700-0286	W1700-0286	E100-0346	E100-0346	E100-0346	C100-0285	C100-0285	C100-0285	
Colour	W1700-0287	W1700-0287	W1700-0287	E100-0347	E100-0347	E100-0347	C100-0286	C100-0286	C100-0286	
Colour	W1700-0288	W1700-0288	W1700-0288	E100-0348	E100-0348	E100-0348	C100-0287	C100-0287	C100-0287	
Colour	W1700-0289	W1700-0289	W1700-0289	E100-0349	E100-0349	E100-0349	C100-0288	C100-0288	C100-0288	
Colour	W1700-0290	W1700-0290	W1700-0290	E100-0350	E100-0350	E100-0350	C100-0289	C100-0289	C100-0289	
Colour	W1700-0291	W1700-0291	W1700-0291	E100-0351	E100-0351	E100-0351	C100-0290	C100-0290	C100-0290	
Colour	W1700-0292	W1700-0292	W1700-0292	E100-0352	E100-0352	E100-0352	C100-0291	C100-0291	C100-0291	
Colour	W1700-0293	W1700-0293	W1700-0293	E100-0353	E100-0353	E100-0353	C100-0292	C100-0292	C100-0292	
Colour	W1700-0294	W1700-0294	W1700-0294	E100-0354	E100-0354	E100-0354	C100-0293	C100-0293	C100-0293	
Colour	W1700-0295	W1700-0295	W1700-0295	E100-0355	E100-0355	E100-0355	C100-0294	C100-0294	C100-0294	
Colour	W1700-0296	W1700-0296	W1700-0296	E100-0356	E100-0356	E100-0356	C100-0295	C100-0295	C100-0295	
Colour	W1700-0297	W1700-0297	W1700-0297	E100-0357	E100-0357	E100-0357	C100-0296	C100-0296	C100-0296	
Colour	W1700-0298	W1700-0298	W1700-0298	E100-0358	E100-0358	E100-0358	C100-0297	C100-0297	C100-0297	
Colour	W1700-0299	W1700-0299	W1700-0299	E100-0359	E100-0359	E100-0359	C100-0298	C100-0298	C100-0298	
Colour	W1700-0300	W1700-0300	W1700-0300	E100-0360	E100-0360	E100-0360	C100-0299	C100-0299	C100-0299	
Colour	W1700-0301	W1700-0301	W1700-0301	E100-0361	E100-0361	E100-0361	C100-0300	C100-0300	C100-0300	
Colour	W1700-0302	W1700-0302	W1700-0302	E100-0362	E100-0362	E100-0362	C100-0301	C100-0301	C100-0301	
Colour	W1700-0303	W1700-0303	W1700-0303	E100-0363	E100-0363	E100-0363	C100-0302	C100-0302	C100-0302	
Colour	W1700-0304	W1700-0304	W1700-0304	E100-0364	E100-0364	E100-0364	C100-0303	C100-0303	C100-0303	
Colour	W1700-0305	W1700-0305	W1700-0305	E100-0365	E100-0365	E100-0365	C100-0304	C100-0304	C100-0304	
Colour	W1700-0306	W1700-0306	W1700-0306	E100-0366	E100-0366	E100-0366	C100-0305	C100-0305	C100-0305	
Colour	W1700-0307	W1700-0307	W1700-0307	E100-0367	E100-0367	E100-0367	C100-0306	C100-0306	C100-0306	
Colour	W1700-0308	W1700-0308	W1700-0308	E100-0368	E100-0368	E100-0368	C100-0307	C100-0307	C100-0307	
Colour	W1700-0309	W1700-0309	W1700-0309	E100-0369	E100-0369	E100-0369	C100-0308	C100-0308	C100-0308	
Colour	W1700-0310	W1700-0310	W1700-0310	E100-0370	E100-0370	E100-0370	C100-0309	C100-0309	C100-0309	
Colour	W1700-0311	W1700-0311	W1700-0311	E100-0371	E100-0371	E100-0371	C100-0310	C100-0310	C100-0310	
Colour	W1700-0312	W1700-0312	W1700-0312	E100-0372	E100-0372	E100-0372	C100-0311	C100-0311	C100-0311	
Colour	W1700-0313	W1700-0313	W1700-0313	E100-0373	E100-0373	E100-0373	C100-0312	C100-0312	C100-0312	
Colour	W1700-0314	W1700-0314	W1700-0314	E100-0374	E100-0374	E100-0374	C100-0313	C100-0313	C100-0313	
Colour	W1700-0315	W1700-0315	W1700-0315	E100-0375	E100-0375	E100-0375	C100-0314	C100-0314	C100-0314	
Colour	W1700-0316	W1700-0316	W1700-0316	E100-0376	E100-0376	E100-0376	C100-0315	C100-0315	C100-0315	
Colour	W1700-0317	W1700-0317	W1700-0317	E100-0377	E100-0377	E100-0377	C100-0316	C100-0316	C100-0316	
Colour	W1700-0318	W1700-0318	W1700-0318	E100-0378	E100-0378	E100-0378	C100-0317	C100-0317	C100-0317	
Colour	W1700-0319	W1700-0319	W1700-0319	E100-0379	E100-0379	E100-0379	C100-0318	C100-0318	C100-0318	
Colour	W1700-0320	W1700-0320	W1700-0320	E100-0380	E100-0380	E100-0380	C100-0319	C100-0319	C100-0319	
Colour	W1700-0321	W1700-0321	W1700-0321	E100-0381	E100-0381	E100-0381	C100-0320	C100-0320	C100-0320	
Colour	W1700-0322	W1700-0322	W1700-0322	E100-0382	E100-0382	E100-0382	C100-0321	C100-0321	C100-0321	
Colour	W1700-0323	W1700-0323	W1700-0323	E100-0383	E100-0383	E100-0383	C100-0322	C100-0322	C100-03	

WING PRO

Product range

WING PRO **1022**

WING PRO **1027**

WING PRO **1028**

DOUBLE ROW COIL

HEATING POWER RANGE:
17 - 88 kW

EXHAUST FLOW RATE:
7 300 - 10 700 m³/h

MAXIMUM AIR STREAM RANGE:
7 m

SINGLE ROW COIL

HEATING POWER RANGE:
9 - 48 kW

EXHAUST FLOW RATE:
7 900 - 11 900 m³/h

MAXIMUM AIR STREAM RANGE:
7.5 m

WITHOUT HEATING (AMBIENT)

EXHAUST FLOW RATE:
8 500 - 12 800 m³/h

MAXIMUM AIR STREAM RANGE:
8 m


WING PRO 200




WING PRO 150




HORIZONTAL INSTALLATION

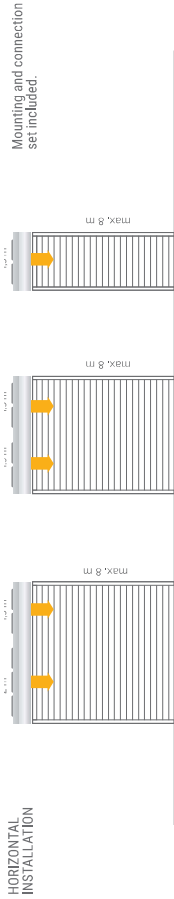

VERTICAL INSTALLATION

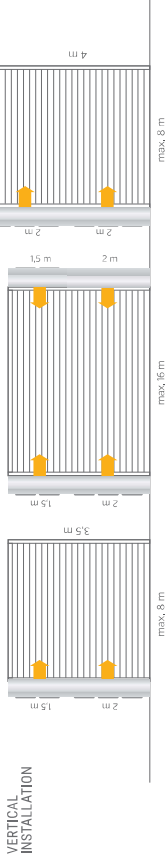

Stream range

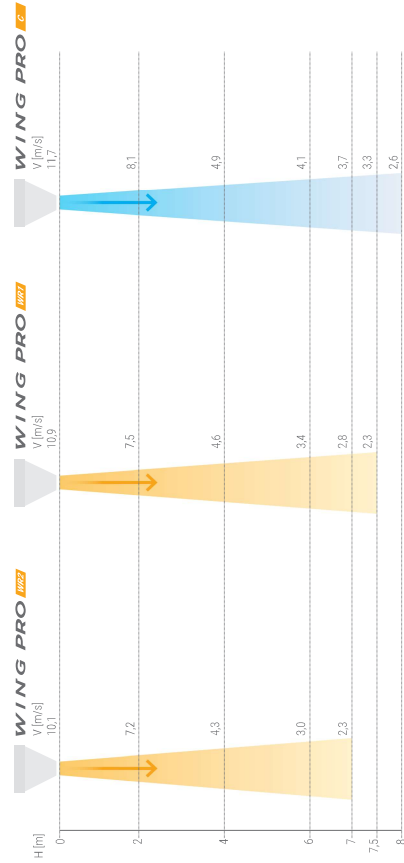

Technical parameters

PARAMETERS	WING PRO DOUBLE ROW COIL		WING PRO SINGLE ROW COIL		WITHOUT HEATING (AMBIENT)	
	W150 EC	W200 EC	W150 EC	W200 EC	C150 EC	C200 EC
VTS article No.	1-4-2801-0349	1-4-2801-0355	1-4-2801-0348	1-4-2801-0354	1-4-2801-0347	1-4-2801-0353
Max. height of door	1.5	2	1.5	2	1.5	2
Max. air stream range	7	7.5	7.5	8	8	8
Max. flow rate	7 900	10 700	7 900	11 900	8 500	12 800
Heating power range	17-58	28-88	3-32	15-48	-	-
Max. temperature of heating medium	130	130	-	-	-	-
Max. Working pressure	1.6	1.6	-	-	-	-
Diameter of stub pipe connectors	3/4	3/4	-	-	-	-
Supply voltage	~230V/1,50					
EC motor power	2 x 0,25	3 x 0,25	2 x 0,25	3 x 0,25	2 x 0,25	3 x 0,25
Rated current (EC motor)	2 x 1,3	3 x 1,3	2 x 1,3	3 x 1,3	2 x 1,3	3 x 1,3
Weight AC/EC (without water)	53,6	69,6	50,5	66,1	43,4	58,3
IP protection rating	54					

Accessories

HMI WING EC controller

VTS article No. 1-4-2801-0155

Motor support: EC

Power supply: ~230V/1,50

Permissible load: 1x for 230VAC 0,02A for 0V-0V

Setting range: 5,40

Protection rating: IP 20

WING EC WIFI controller

VTS article No. 1-4-2801-0156

Motor support: EC

Power supply: ~230V/1,50

Permissible load: 1x for 230VAC 0,02A for 0V-0V

Setting range: 5,40

Protection rating: IP 20

Door sensor (reed switch)

VTS article No. 1-4-0101-0454

Contact configuration: NO

Switching current: 500 mA

Switching voltage: max 200 V

Connection: screw

Value with actuator

VTS article No. 1-4-1704-2019

Power supply: ~230V/1,50

Opening: 3/3 min

Kvs: 4,5

Protection rating: IP 54

Flex connection hoses

VTS article No. 1-5-2702-2076

Length: 0,6-0,9 m

Connection: 3/4"

Type: GW

Max. fluid pressure: MPa

Min. working temperature: °C

Max. working temperature for glycol: °C

Max. working temperature: °C

Set includes: hose (2 pcs) gasket (4 pcs)

Noise level

Fan speed	WING PRO W R1	WING PRO W R2	WING PRO C
I	1,5m	2m	1,5m
II	45	46	45
III	55	57	54
	64	65	62
			63
			65
			66

* speed measurement conditions: semi-open space; horizontal installation on the wall; measurement performed 5 m away from the device





VTS Sp. z o.o.
Olivia Tower
Al. Grunwaldzka 472 A
80-309 Gdańsk, Poland
T: +48 (58) 628 13 54
F: +48 (58) 628 13 22
vtsgroup@vtsgroup.com

Due to continuous improvement of the products, VTS reserves right to implement modifications.
Some of technical data and descriptions may vary from the actual products specification.
Before placing the order, please, confirm all technical specification with VTS sales representative.

www.vtsgroup.com