

VCA3U/VCD1

Kasetni split klima uređaj * R32

VCA3U-12HRFM8 UJ/VCA3U-18HRFM8 UJ/VCD1-24HRFM8/ VCD1-36HRFM8/VCD1-48HRFM8

*Wi-fi kontrola uz ugradnju dodatnog modula WF-60A1-C(12-18kBtu)



*Wi-fi kontrola modul EU-OSK103 (24kBtu-55kBtu)



JEDINICA UNUTRAŠNJA			12k	18k	24k	36k	48k
			VCA3U-12HRFM8 UJ	VCA3U-18HRFM8 UJ	VCD1-24HRFM8	VCD1-36HRFM8	VCD1-48HRFM8
Kapacitet (min/nom/max)	hlađenje	BTU/h	2897/12000/14020	9900/18000/19064	11263/24000/27000	9200/36000/39000	12000/48000/54000
		kW	0.85/3.52/4.11	2.9/5.28/5.59	3.30/7.03/7.91	2.70/10.55/11.43	3.52/14.07/15.83
Ulazna snaga	grejanje	BTU/h	1604/13000/14705	8100/19000/20800	9577/26000/30500	9500/38000/43200	14000/55000/59000
		kW	0.47/3.81/4.31	2.37/5.57/6.1	2.81/7.62/8.94	2.78/11.14/12.66	4.10/16.12/17.29
SEER	hlađenje	w	168/1010/1434	720/1633/2088	780/2320/2748	890/4000/4150	800/4650/5900
	grejanje	w	124/1019/1376	700/1540/1930	610/1900/2700	780/3000/4000	900/4580/5500
Energetska klasa	hlađenje		6.6	6.3	6.2	6.4	6.1
	grejanje		4.1	4.0	4.0	4.0	4.0
Zvučni pritisak (Hi/Mi/Lo)	hlađenje		A++	A++	A++	A++	A++
	grejanje		A+	A+	A+	A+	A+
Nivo buke		dB(A)	41/36/33/25.5	43/39.5/35.5/29	45.5/42.5/39.5/27	50/47.5/44.5/39	51/48.5/46.5/37.5
		dB(A)	57	57	57	63	65
Protok vazduha (Hi/Mi/Lo)		m³/h	620/510/420	720/620/500	1300/1140/1000	1800/1600/1400	1970/1780/1580
Radna jačina struje	hlađenje	A	1.32/4.45/6.31	3.2/7.2/9.2	4.2/10.2/12	1.6/6.5/6.5	1.8/8.1/10.2
	grejanje	A	1.04/4.73/6.07	3.1/6.8/8.5	3.6/8.5/12.1	1.3/5.0/6.4	1.9/8.0/9.5
Napajanje		V/HZ/Ph	220-240/50/1	220-240/50/1	220-240/50/1	220-240/50/1	220-240/50/1
Cevna veza	tečnost	mm	6.35	6.35	9.52	9.52	9.52
	gas	mm	9.52	12.7	15.88	15.88	15.88
Kondenz. Cev		mm	od 25	od 32	od 32	od 32	od 32
Dimenzije WxHxD	jedinica	m	570x570x260	570x570x260	830x830x205	830x830x245	830x830x287
	pakovanje	m	662x662x317	662x662x317	910x910x250	910x910x290	910x910x330
	panel		647x647x50	647x647x50	950x950x55	950x950x55	950x950x55
	panel pakovanje		715x715x123	715x715x123	1035x1035x90	1035x1035x90	1035x1035x90
Neto/Bruto masa		kg	16.3/20.4	16/20.6	21.6/25.4	27.2/31.2	29.3/33.5
Neto/Bruto masa panel		kg	2.5/4.5	2.5/4.5	6/9	6/9	6/9

DIMENZIJE: VCA3U-12/18HRFM8

DIMENZIJE: VCD1-24HRFM8, 30HRFM8, 36HRFM8, 48HRFM8

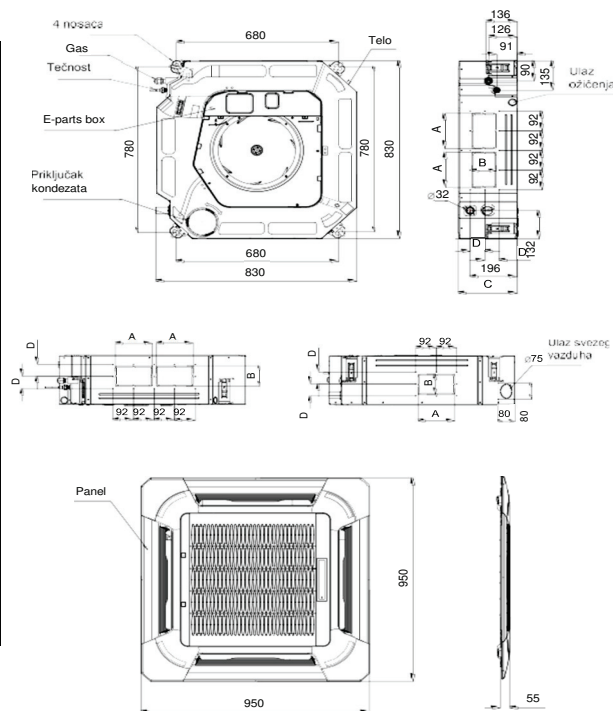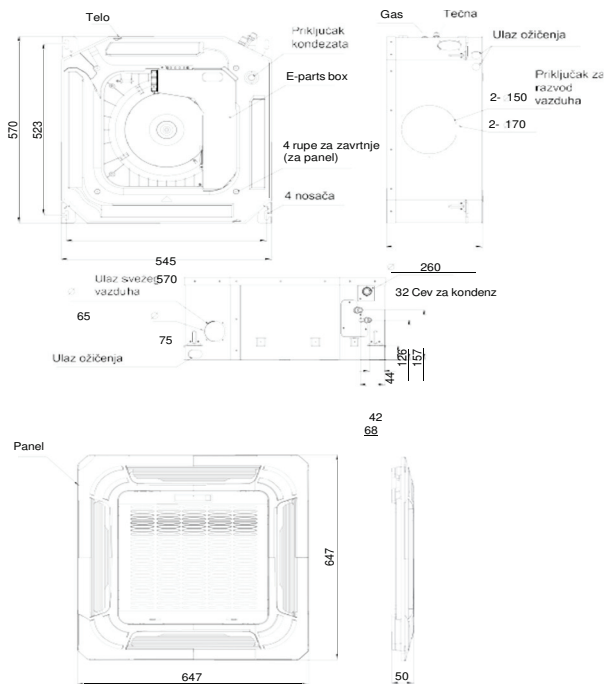

JEDINICA: mm				
Model (kBtu/h)	A	B	C	D
VCD1-24HRFM	165	80	205	50
VCD1-30HRFM	165	100	245	60
VCD1-36HRFM	165	100	245	60
VCD1-48HRFM	165	100	287	60